

TOTAL HEAD


PERFORMANCE FOR 50 HERTZ APPLICATIONS

PERFORMANCE CURVE

.38"/[9,5 MM] DIA. MAX. SPHERICAL SOLIDS

VOLUTE	4156A	CURVE	03A-B-3
IMPELLER	4170B	MODEL	03A-B
SIZE	3X3"	IMP.DIA.	NOTED
SP.GR.	1.0	RPM	1450

M  
PSI  
FT  
44  
60  
40  
56  
36  
52  
48  
110  
32  
44  
28  
40  
24  
32  
20  
28  
16  
24  
20  
16  
8  
12  
8  
4  
4  
0  
0  
U.S.GALLONS PER MINUTE  
LITRES PER SECOND  
CUBIC METRES PER HOUR

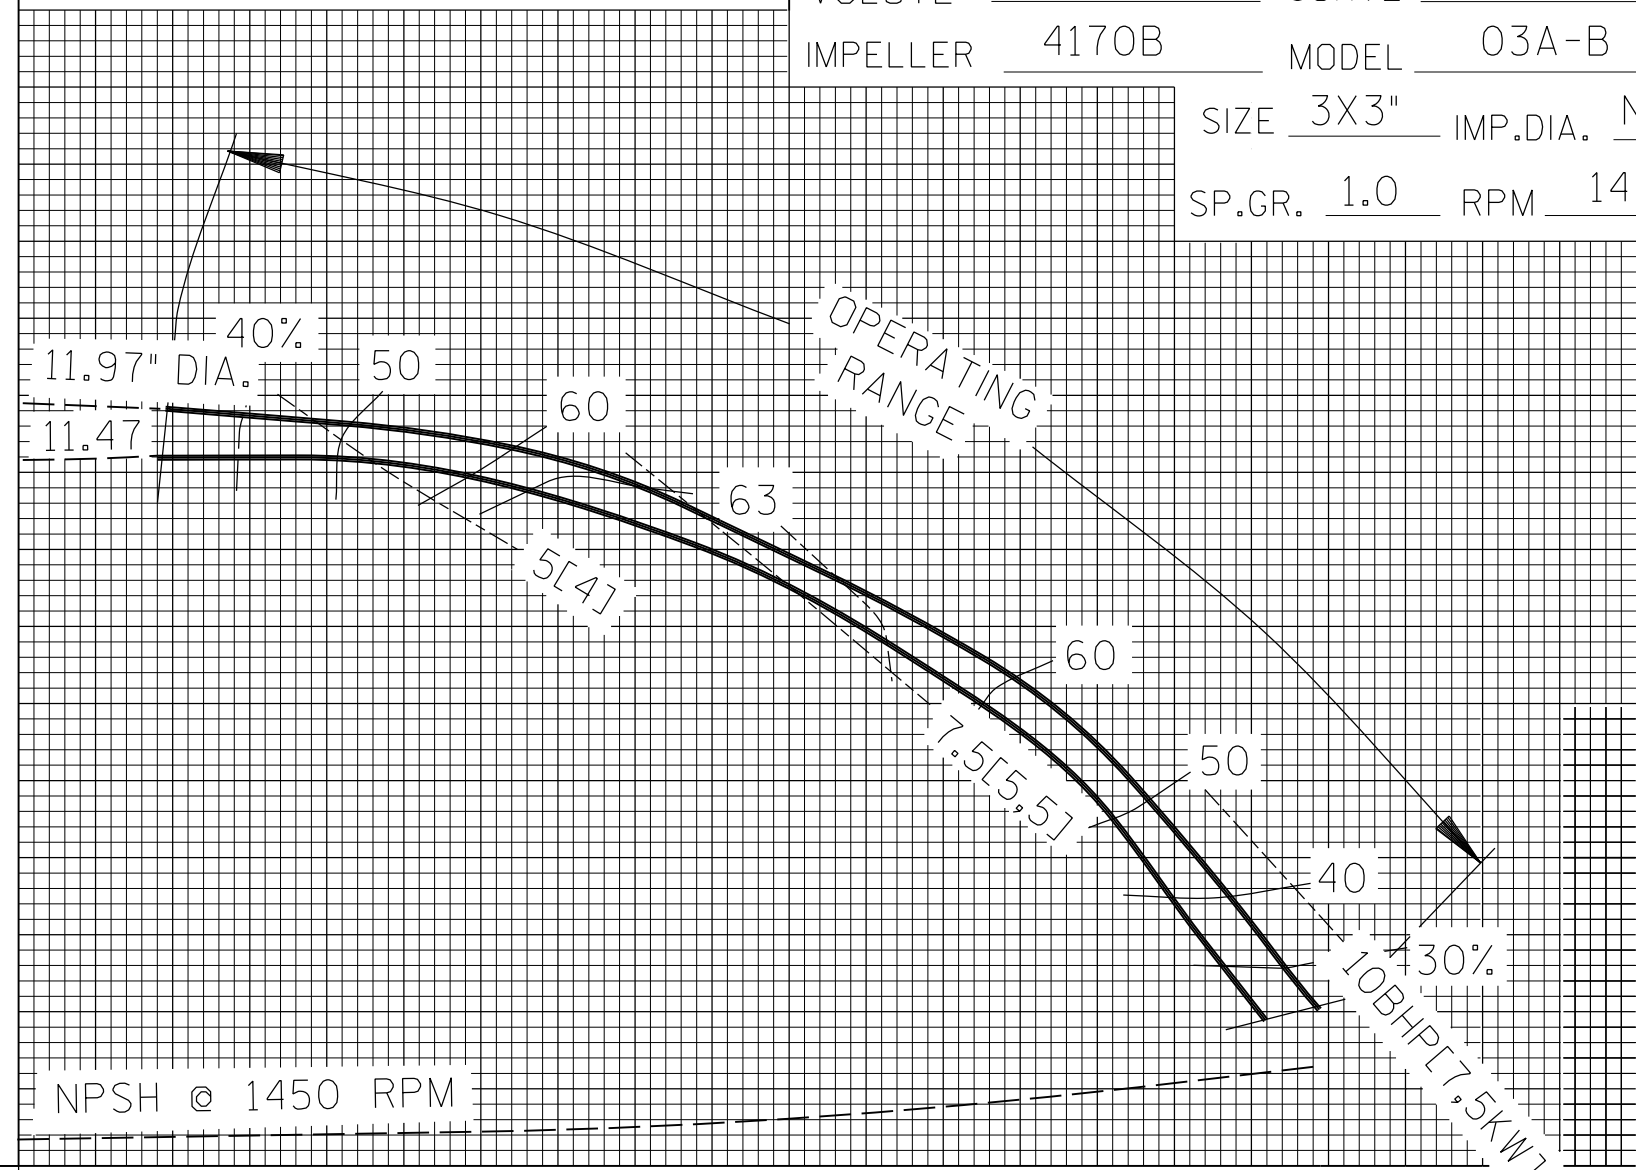

NPSH  
FT  
M  
30  
20  
10  
0  
10  
8  
6  
4  
2  
0



T-5-12-R

FILE NO. 03AB-S03