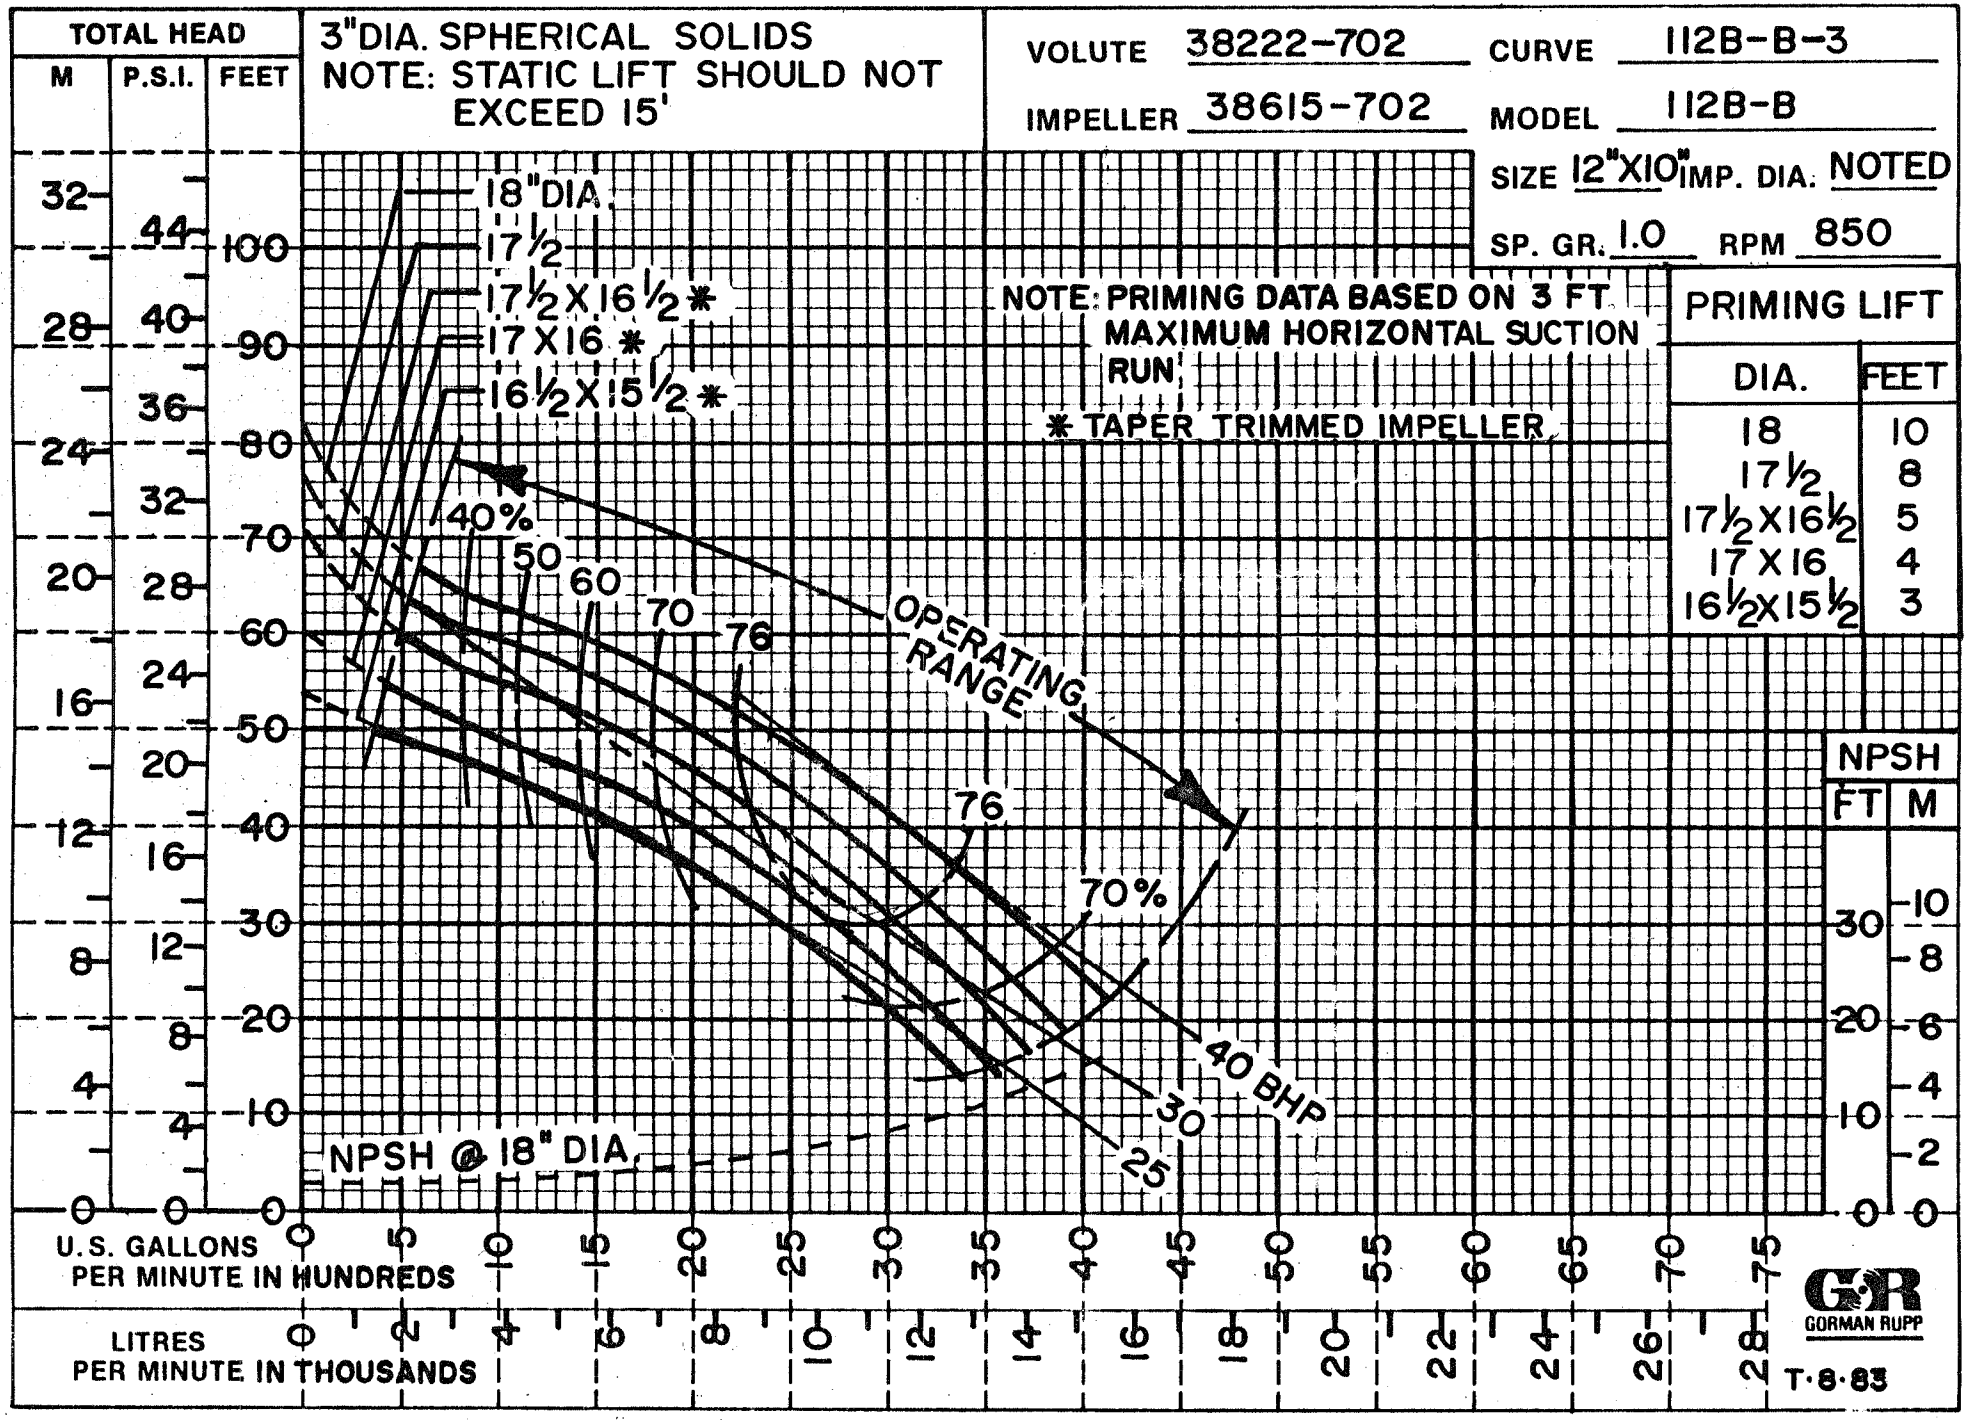
TOTAL HEAD
M
P.S.I.
FEET
3"DIA. SPHERICAL SOLIDS
NOTE: STATIC LIFT SHOULD NOT EXCEED 15'
VOLUTE 38222-702
CURVE 112B-B-3
IMPELLER 38615-702
MODEL 112B-B
SIZE 12"X10" IMP. DIA. NOTED
SP. GR. 1.0
RPM 850
18"DIA.
17½
17½X16½*
17X16*
16½X15½*
40%
50
60
70
76
OPERATING RANGE
76
70%
40 BHP
30
25
NPSH @ 18" DIA.
NOTE: PRIMING DATA BASED ON 3 FT. MAXIMUM HORIZONTAL SUCTION RUN.
* TAPER TRIMMED IMPELLER
PRIMING LIFT
DIA.
FEET
18 10
17½ 8
17½X16½ 5
17X16 4
16½X15½ 3
NPSH
FT
M
U.S. GALLONS PER MINUTE IN HUNDREDS
LITRES PER MINUTE IN THOUSANDS
GORMAN RUPP
T-8-83