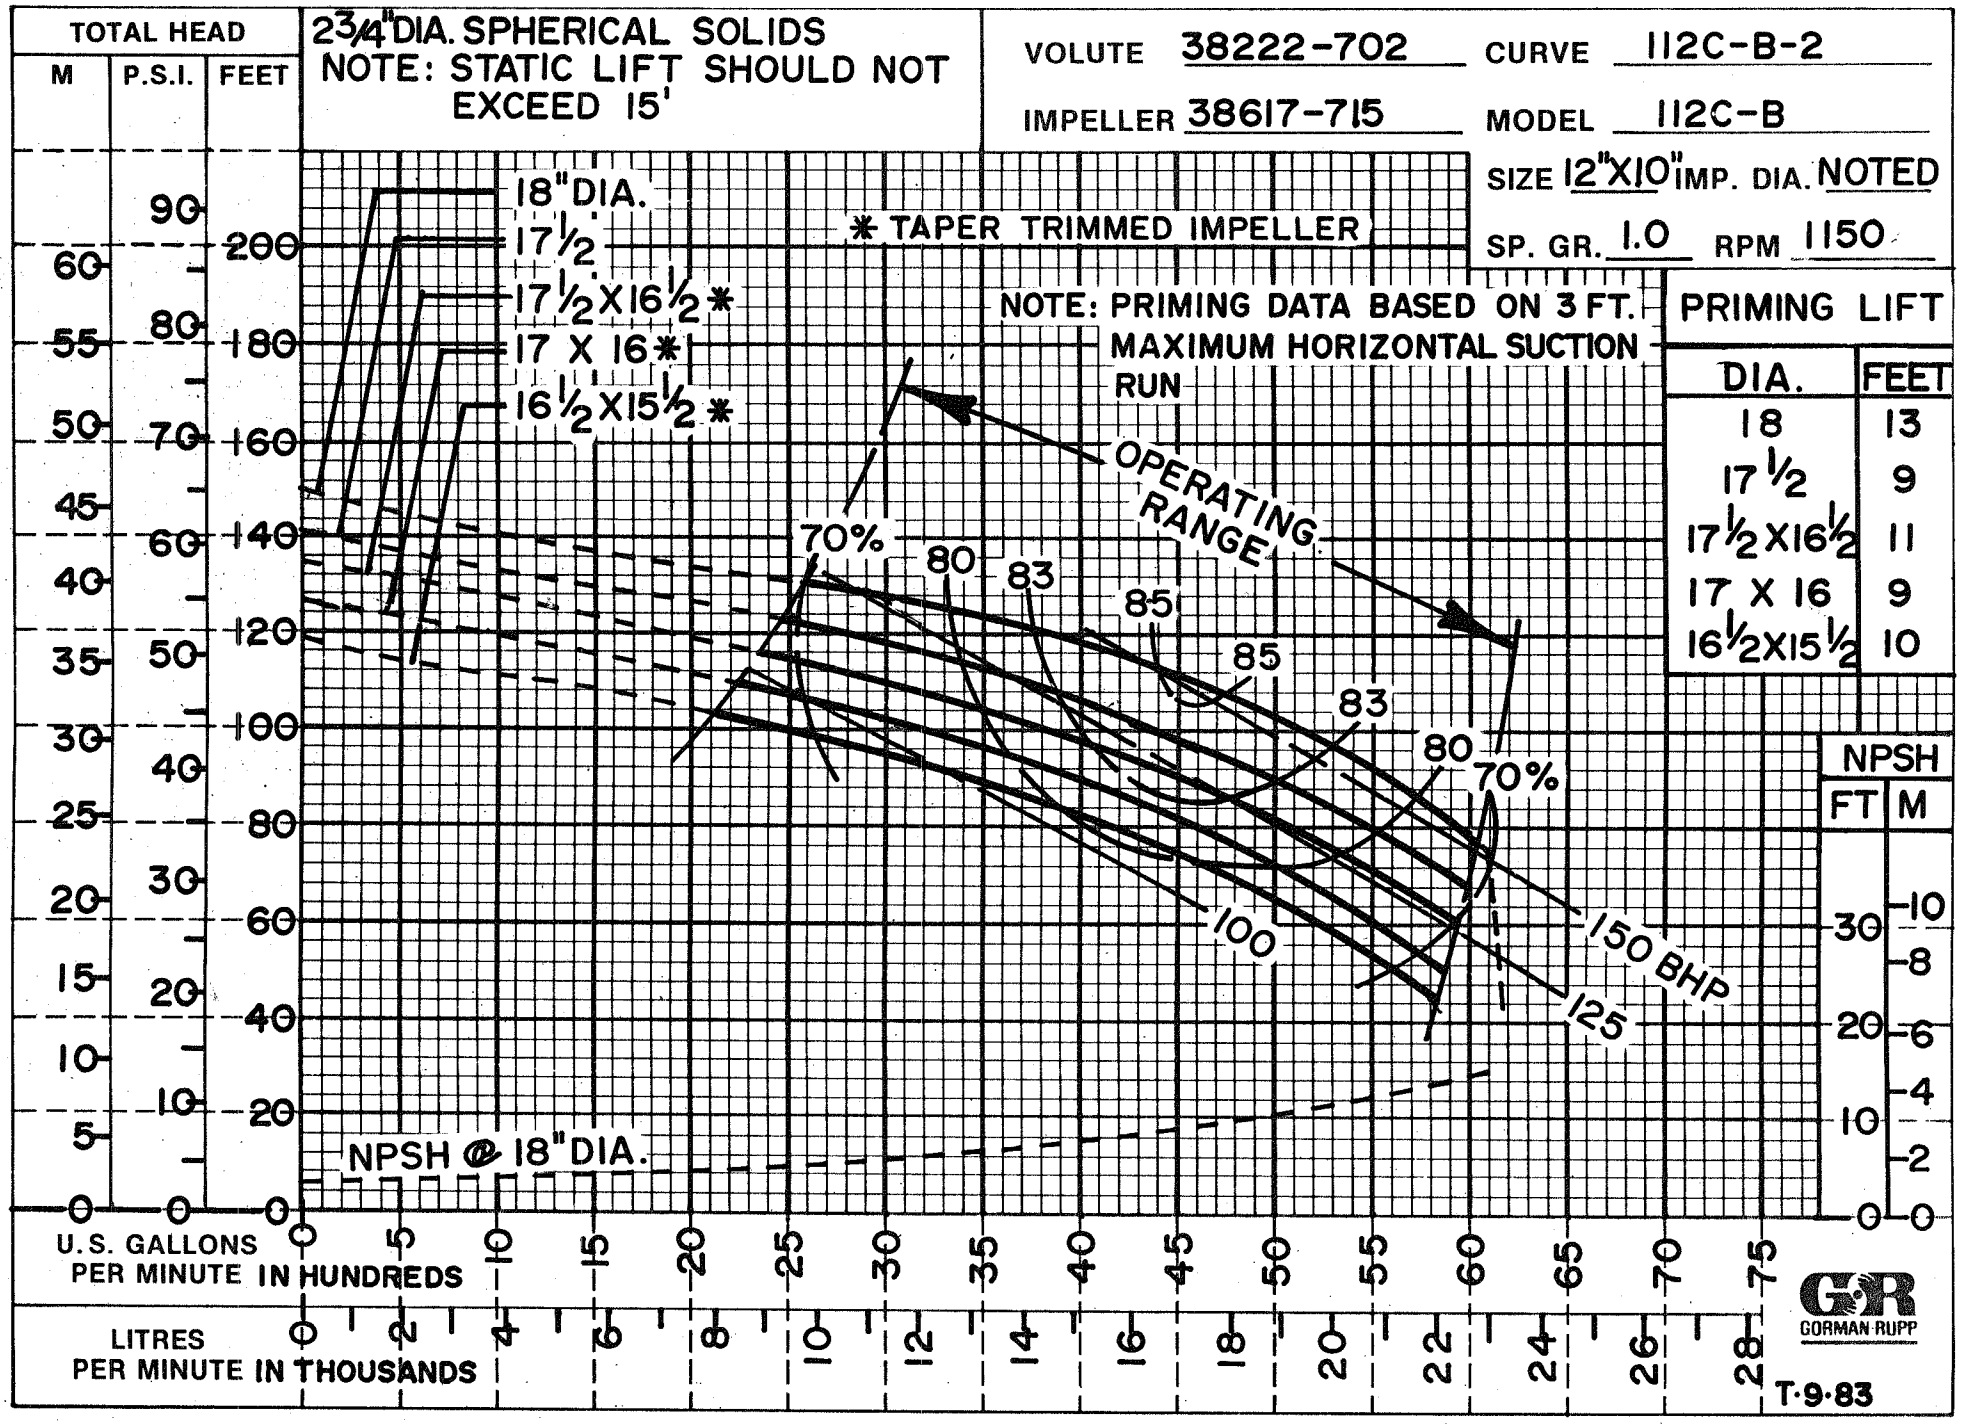
TOTAL HEAD
M
P.S.I.
FEET
2¾" DIA. SPHERICAL SOLIDS
NOTE: STATIC LIFT SHOULD NOT EXCEED 15'
VOLUTE 38222-702
CURVE 112C-B-2
IMPELLER 38617-715
MODEL 112C-B
SIZE 12"X10" IMP. DIA. NOTED
SP. GR. 1.0
RPM 1150
18" DIA.
17½
17½X16½*
17 X 16*
16½X15½*
* TAPER TRIMMED IMPELLER
NOTE: PRIMING DATA BASED ON 3 FT. MAXIMUM HORIZONTAL SUCTION RUN
OPERATING RANGE
70%
80
83
85
85
83
80
70%
100
125
150 BHP
NPSH @ 18" DIA.
PRIMING LIFT
DIA. FEET
18 13
17½ 9
17½X16½ 11
17 X 16 9
16½X15½ 10
NPSH
FT M
U.S. GALLONS PER MINUTE IN HUNDREDS
LITRES PER MINUTE IN THOUSANDS
GORMAN-RUPP
T-9-83