

TOTAL HEAD

MAXIMUM DRY PRIMING LIFTS


RPM	1150	1450	1750	2200	2600
FEET	10	17	23	20	22
METERS	3,1	5,2	7	6,1	6,7

PERFORMANCE CURVE

VOLUTE 8614 CURVE 12B-B-1  
 IMPELLER 8615 MODEL 12B-B  
 SIZE 2"X2" IMP.DIA. 6 7/32"  
 SP.GR. 1.0 RPM VARIOUS

Figure NPSH required prior to using above table.  
 DO NOT use as available Suction Lifts.  
 Dry priming is defined as suction and discharge pipes without liquid, pump casing filled with 70° water.  
 1.25"/[31,8] DIAMETER MAX. SPHERICAL SOLIDS

Note:  
 Select performance within operating range of curve.

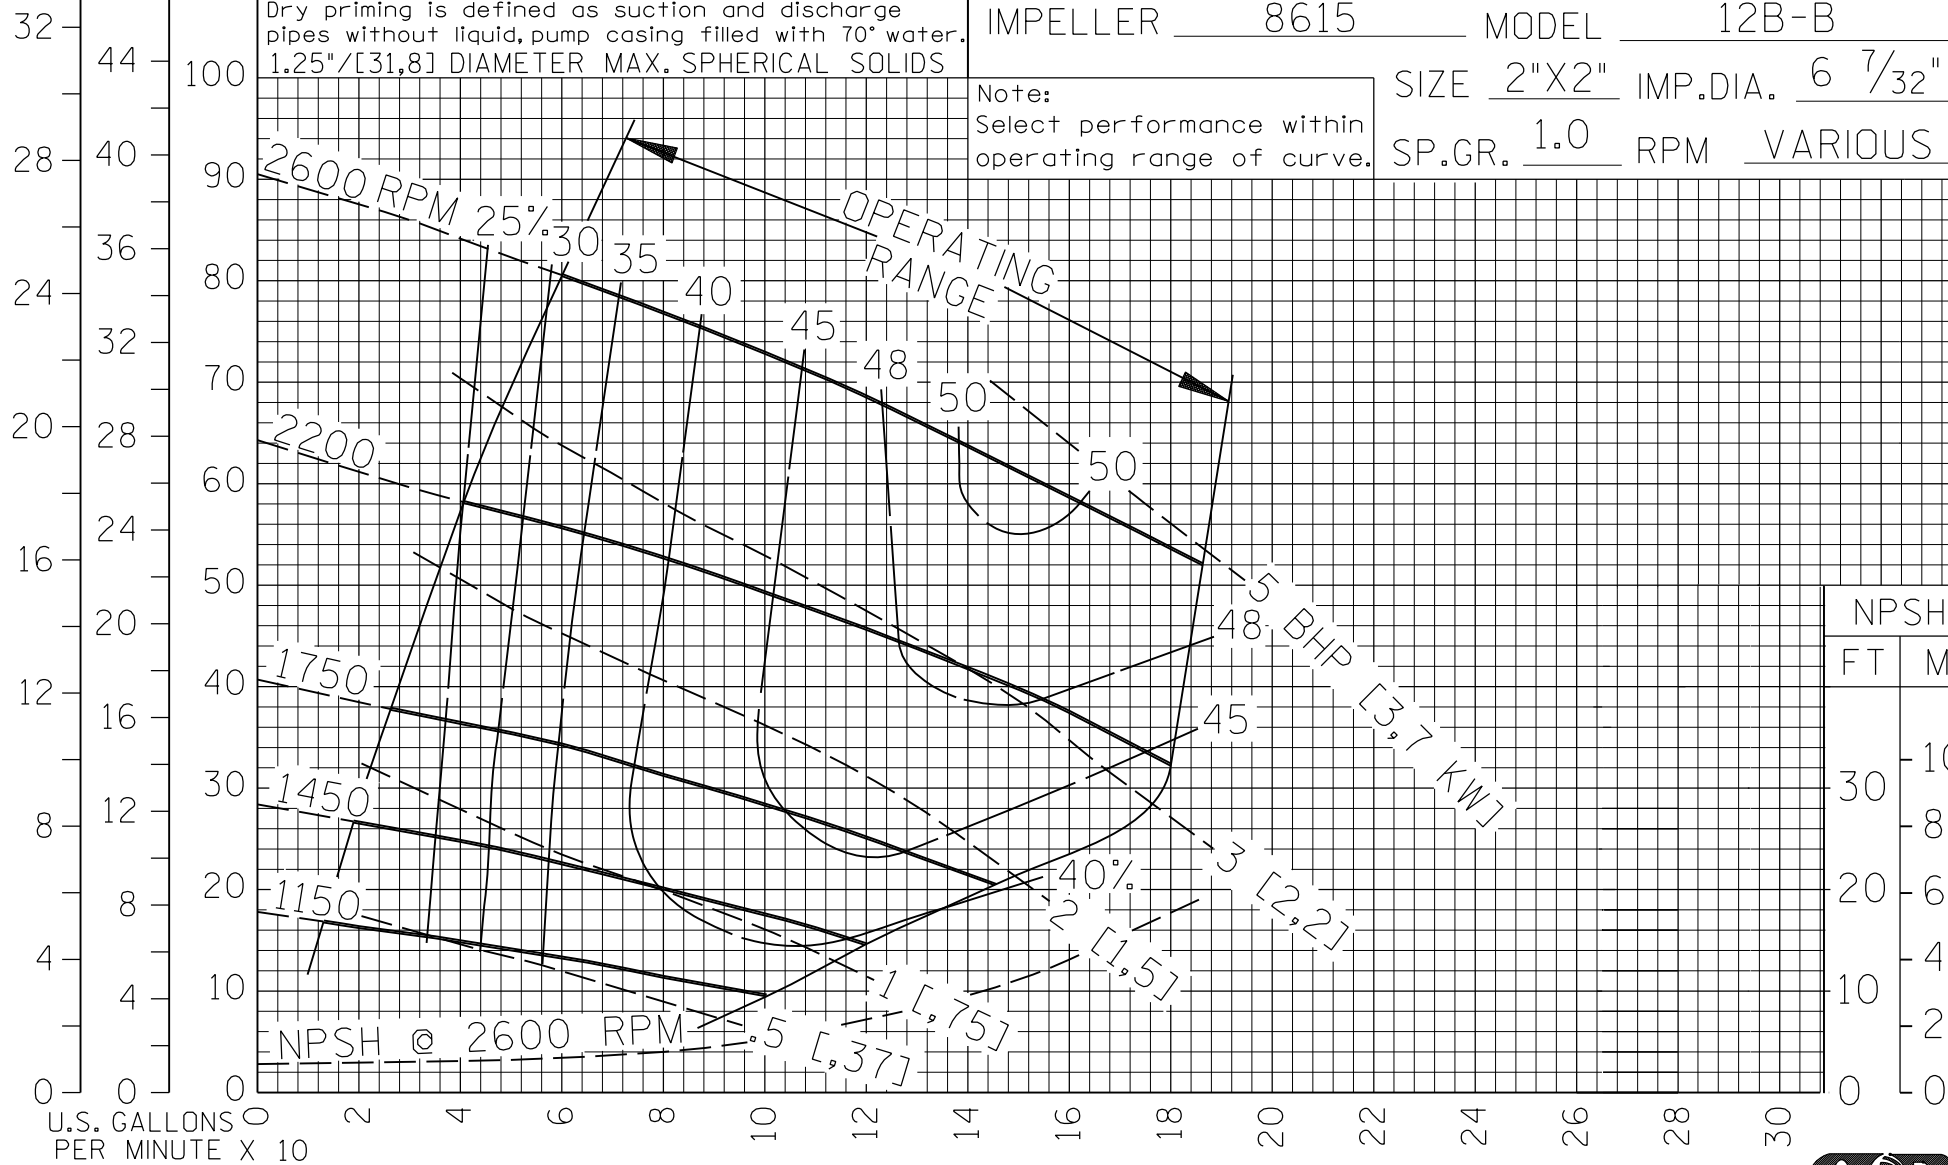

NPSH  
 FT M  
 10  
 8  
 6  
 4  
 2  
 0

FILE NO. 12BB.S01

