PERFORMANCE CURVE

VOLUTE 12909A CURVE 12C-B-1

IMPELLER 12906 MODEL 12C-B

SIZE 2"X2" IMP.DIA. 6 7/32"

SP.GR. 1.0 RPM VARIOUS

MAXIMUM DRY PRIMING LIFTS

RPM	1150	1450	1750	2000	2200	2400	2600
FEET	7	13	18	22	23	24	25
METERS	2,1	4	5,5	6,7	7	7,3	7,6

Figure NPSH required prior to using above table.
DO NOT use as available Suction Lifts.
Dry priming is defined as suction and discharge pipes without liquid, pump casing filled with 70° water.
1.13"/[28,6] DIAMETER MAX. SPHERICAL SOLIDS

Note:
Select performance within operating range of curve.

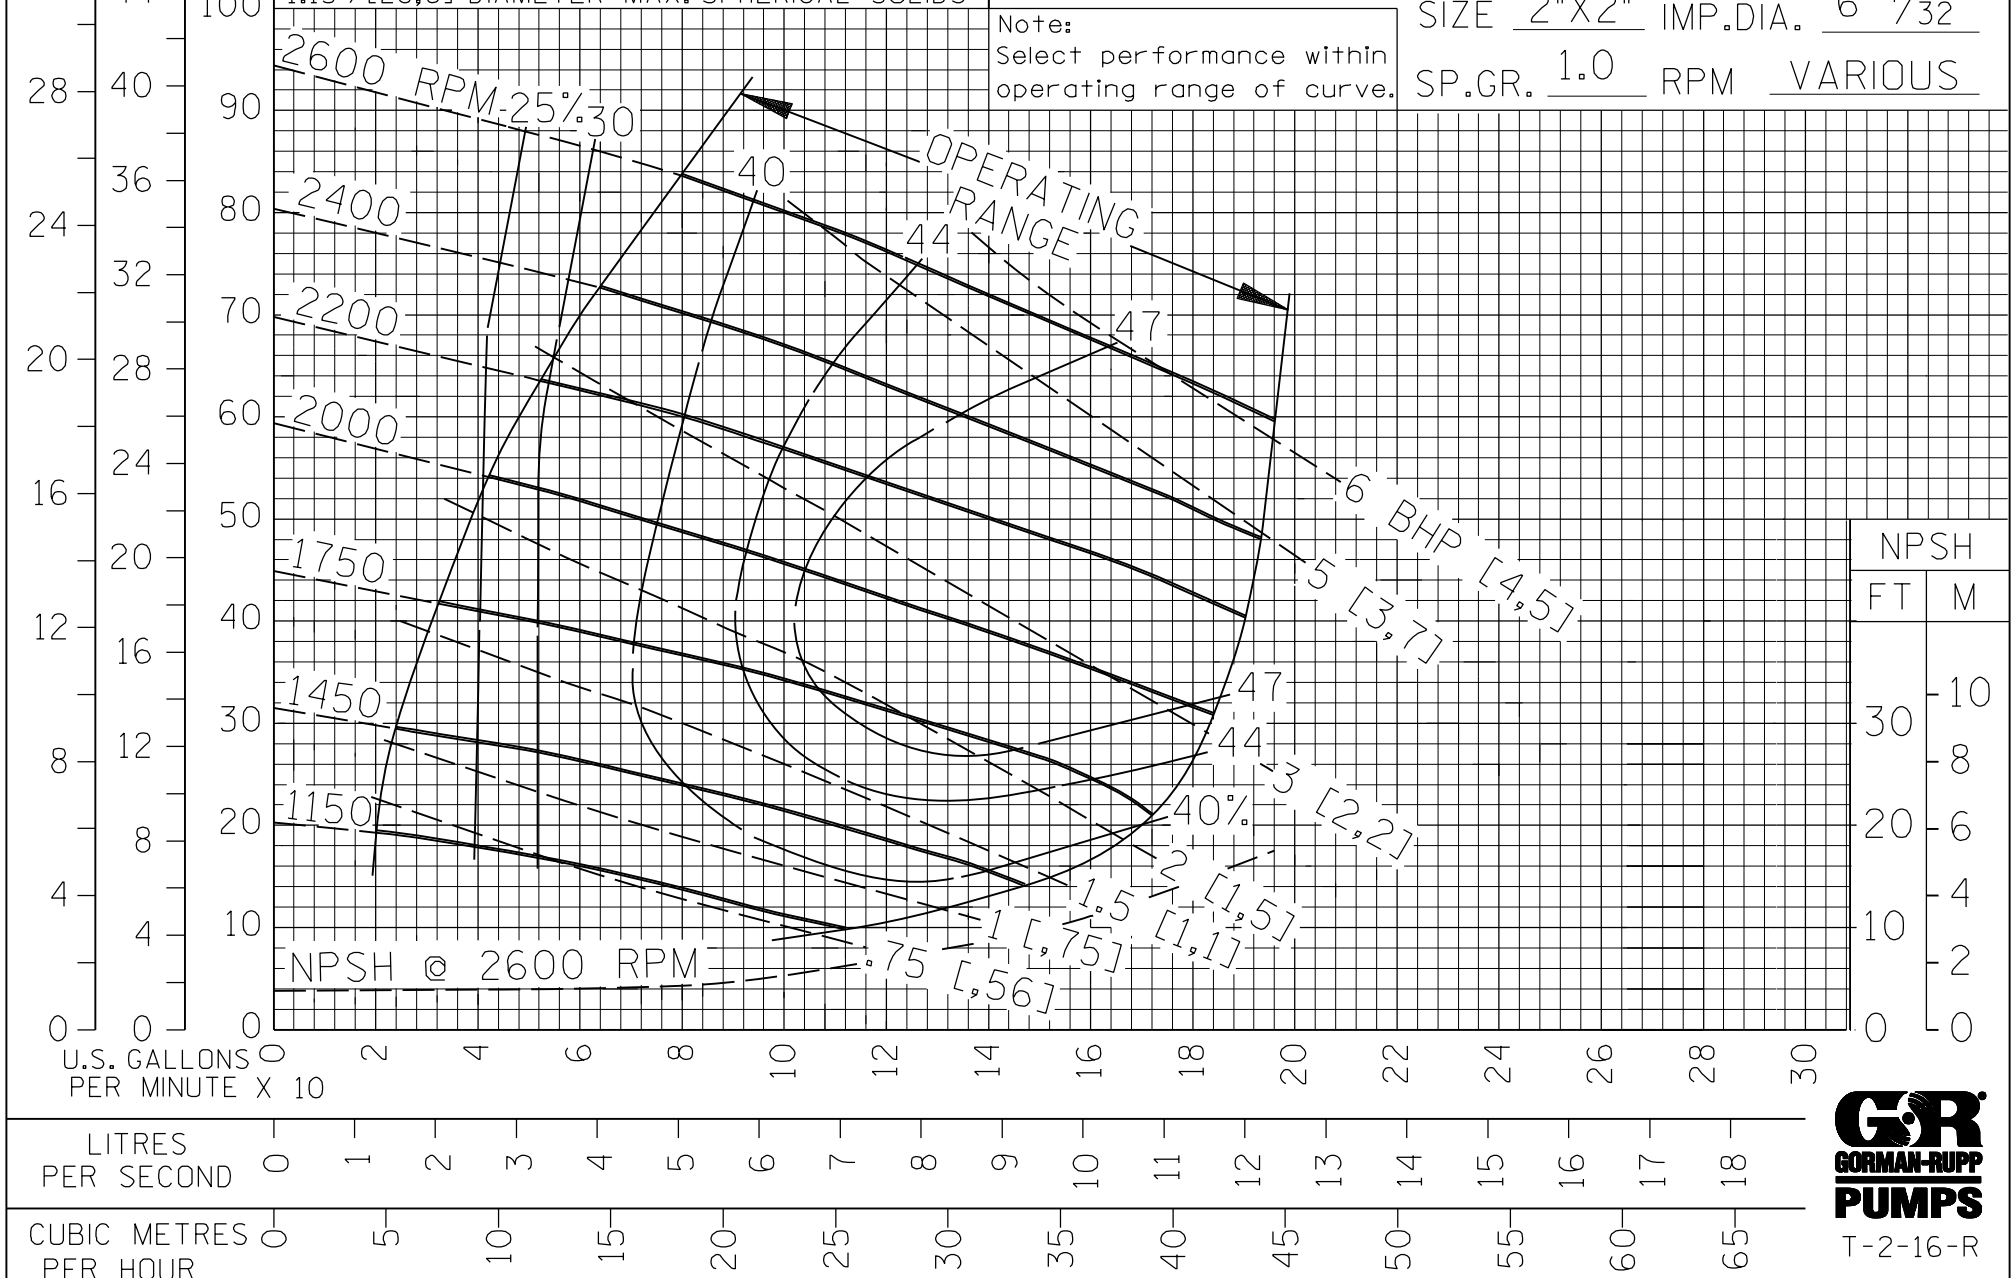

GORMAN-RUPP PUMPS

T-2-16-R

FILE NO. 12CB.S01