

TOTAL HEAD

PERFORMANCE CURVE

M PSI FT

44 60 140

40 56 130

36 52 120

48 110

32 44 100

28 40 90

24 36 80

20 32 70

16 24 60

12 20 50

8 16 40

8 20 30

4 8 20

4 4 10

0 0 0

U.S. GALLONS PER MINUTE

LITRES PER SECOND

CUBIC METRES PER HOUR

VOLUTE 38218-029 CURVE 6404E-B-1


IMPELLER 38615-136 MODEL 6404E-B

SIZE 3"X2" IMP.DIA. NOTED

SP.GR. 1.0 RPM 2900

Note:  
Select performance within  
operating range of curve.

0.75"/[19,1 MM] DIA. MAX. SPHERICAL SOLIDS

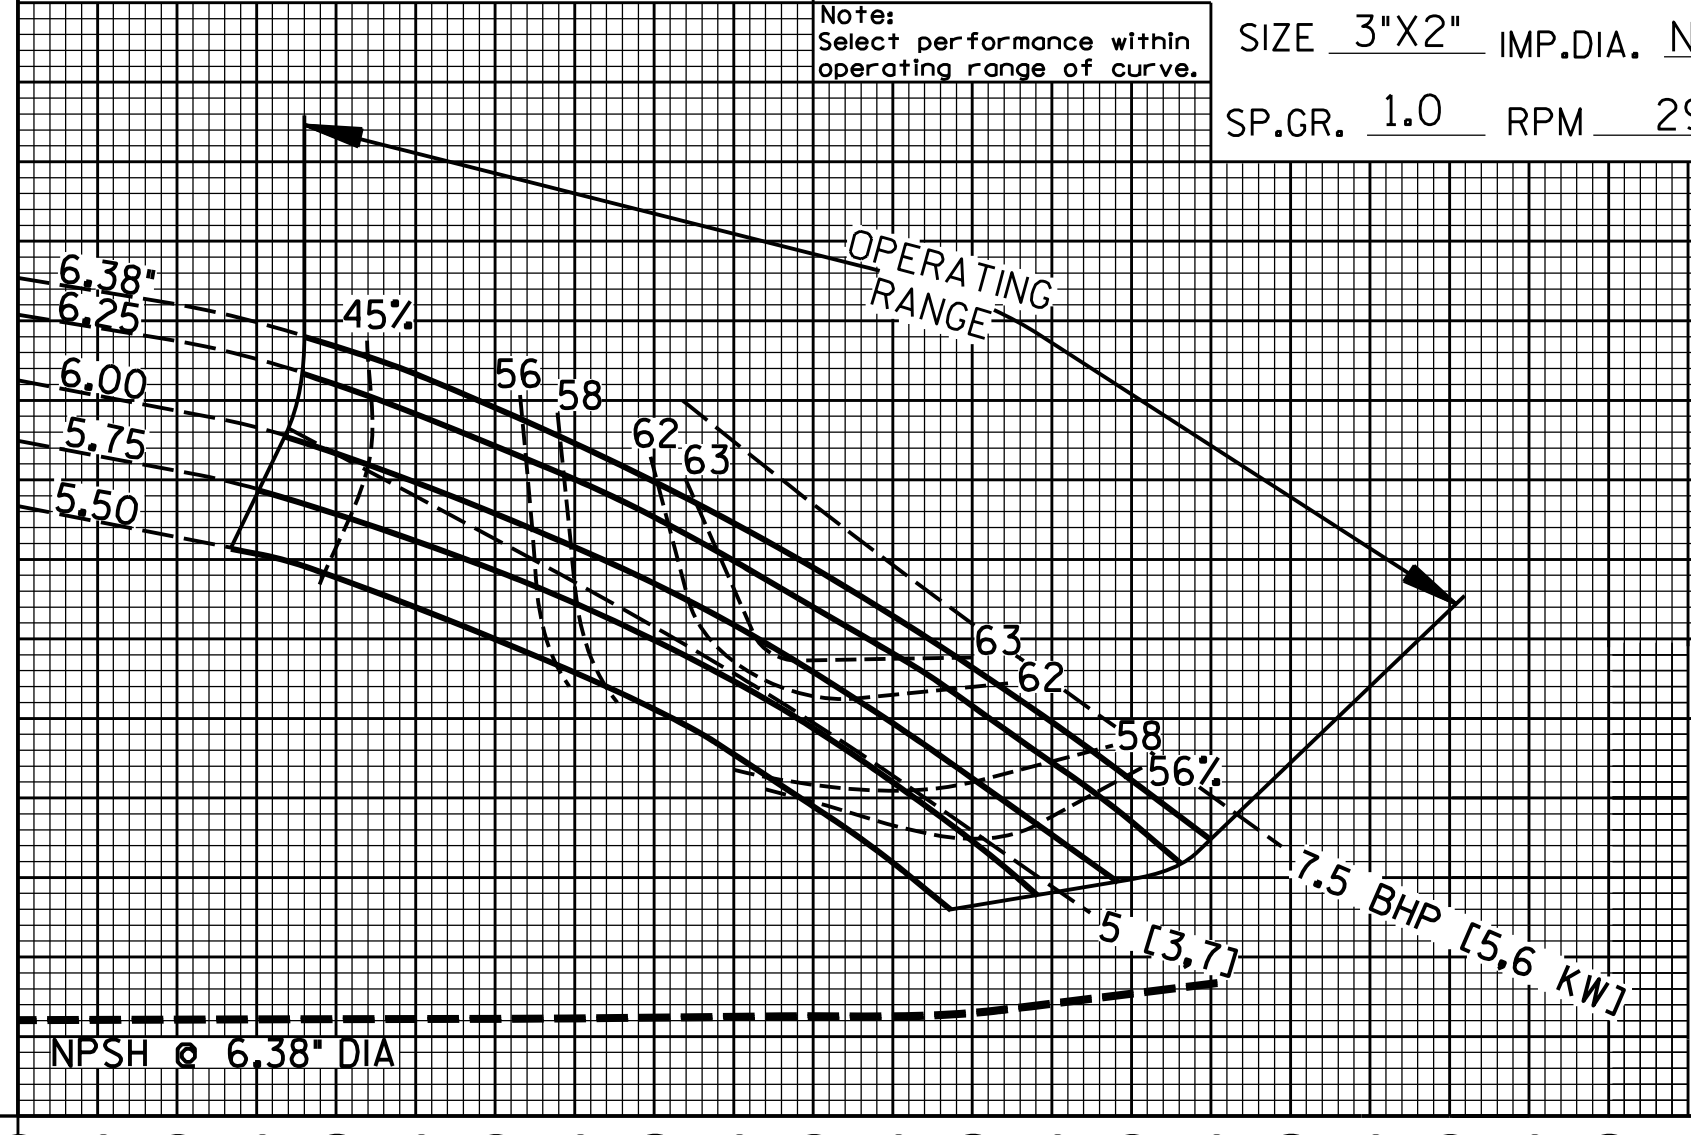

NPSH

FT M

30 10

20 8

10 6

0 4

0 2

0 0

