

TOTAL HEAD


PERFORMANCE CURVE

VOLUTE 38218-029 CURVE 6404E-B-3
 IMPELLER 38615-136 MODEL 6404E-B
 SIZE 3"X2" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1450

0.75"/[19,1 MM] DIA. MAX. SPHERICAL SOLIDS

Note:
 Select performance within
 operating range of curve.

M 9 12 8 7 6 5 4 3 2 1 0
 PSI 13 12 11 10 9 8 7 6 5 4 3 2 1 0
 FT 30 28 26 24 22 20 18 16 14 12 10 8 6 4 2 0

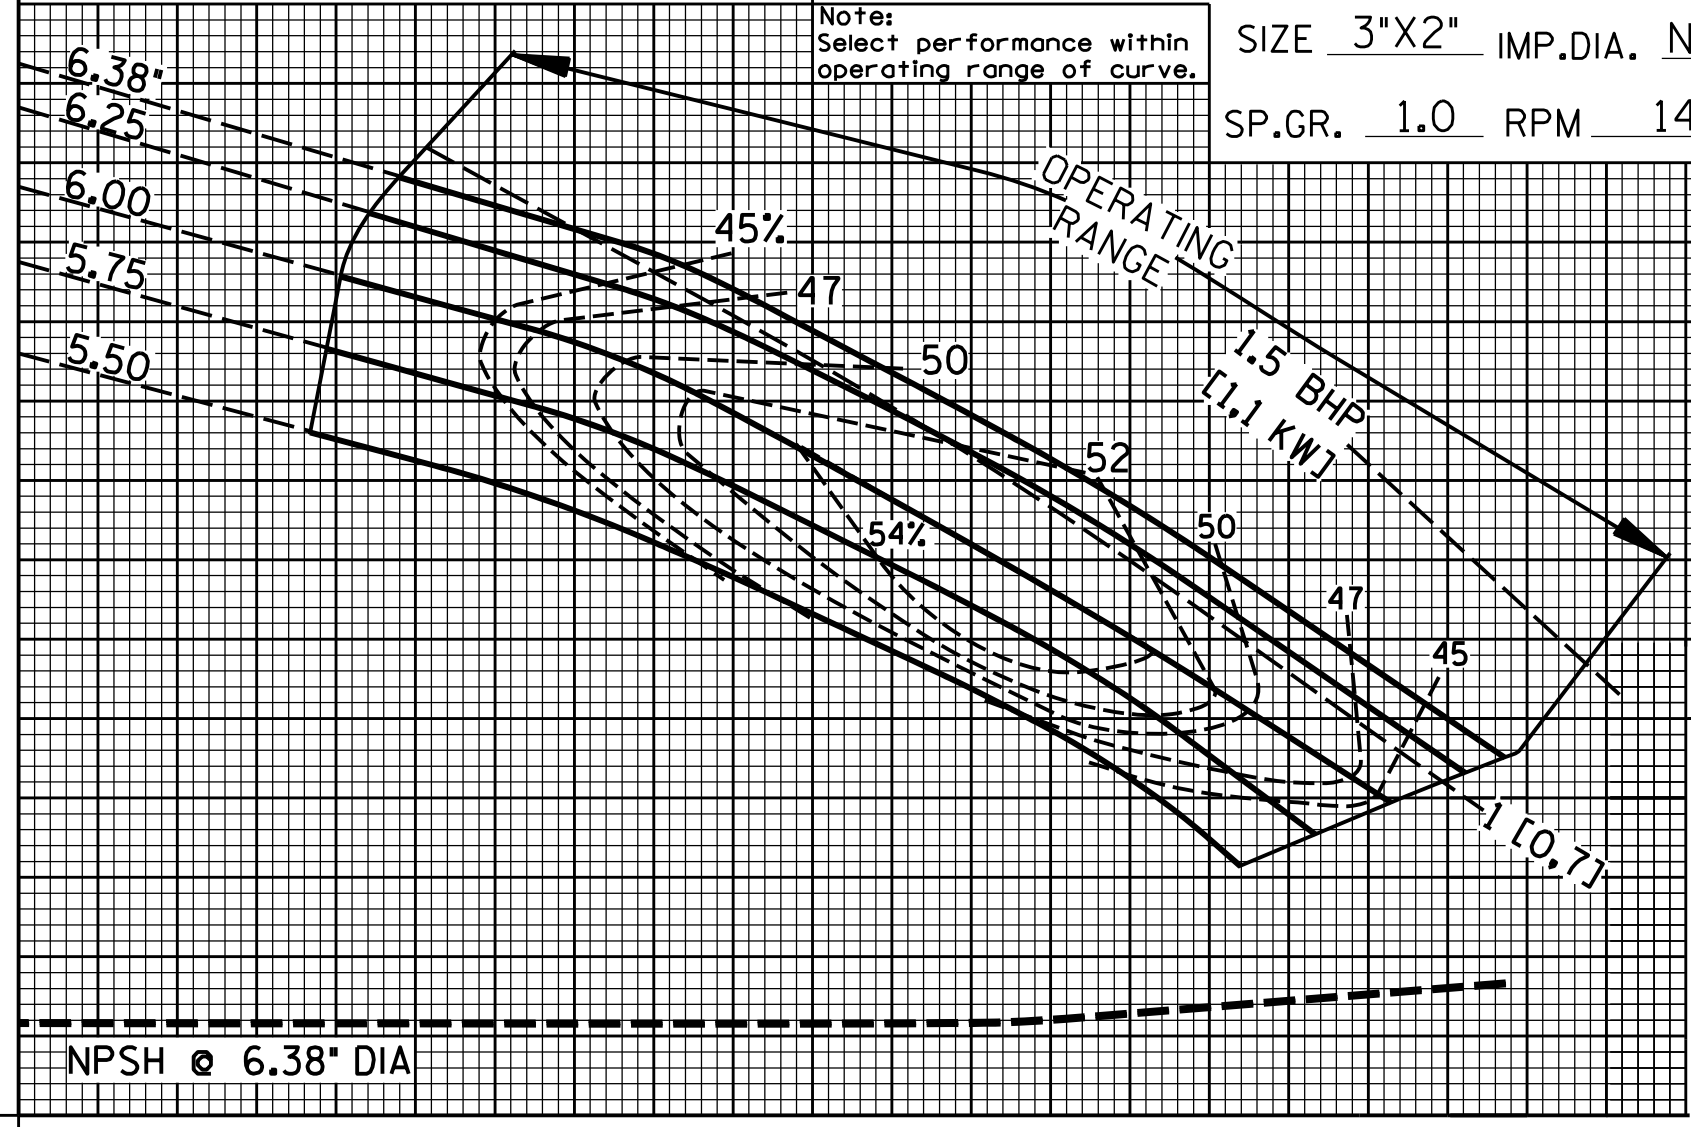

OPERATING RANGE
 1.5 BHP [1.1 KW]

U.S. GALLONS PER MINUTE X 10
 LITRES PER SECOND
 CUBIC METRES PER HOUR

0 1 2 3 4 5 6 7 8 9 10 11 12 13
 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46

NPSH
 FT 30 20 10 0
 M 10 6 4 2 0

