

TOTAL HEAD

PERFORMANCE CURVE

M PSI FT

44 60 140

40 56 130

36 52 120

48 110

44 100

32 40 90

28 40 80

24 36 80

20 28 70

16 24 60

12 20 50

8 16 40

4 8 30

0 4 20

0 4 10

0 0

U.S.GALLONS PER MINUTE

LITRES PER SECOND

CUBIC METRES PER HOUR

1.75"/[44,5 MM] DIA. MAX. SPHERICAL SOLIDS


VOLUTE 38218-031 CURVE 6403F-B-4

IMPELLER 38621-078 MODEL 6403F-B

SIZE 4"X3" IMP.DIA. 8.75"

SP.GR. 1.0 RPM NOTED

Note:  
Select performance within  
operating range of curve.

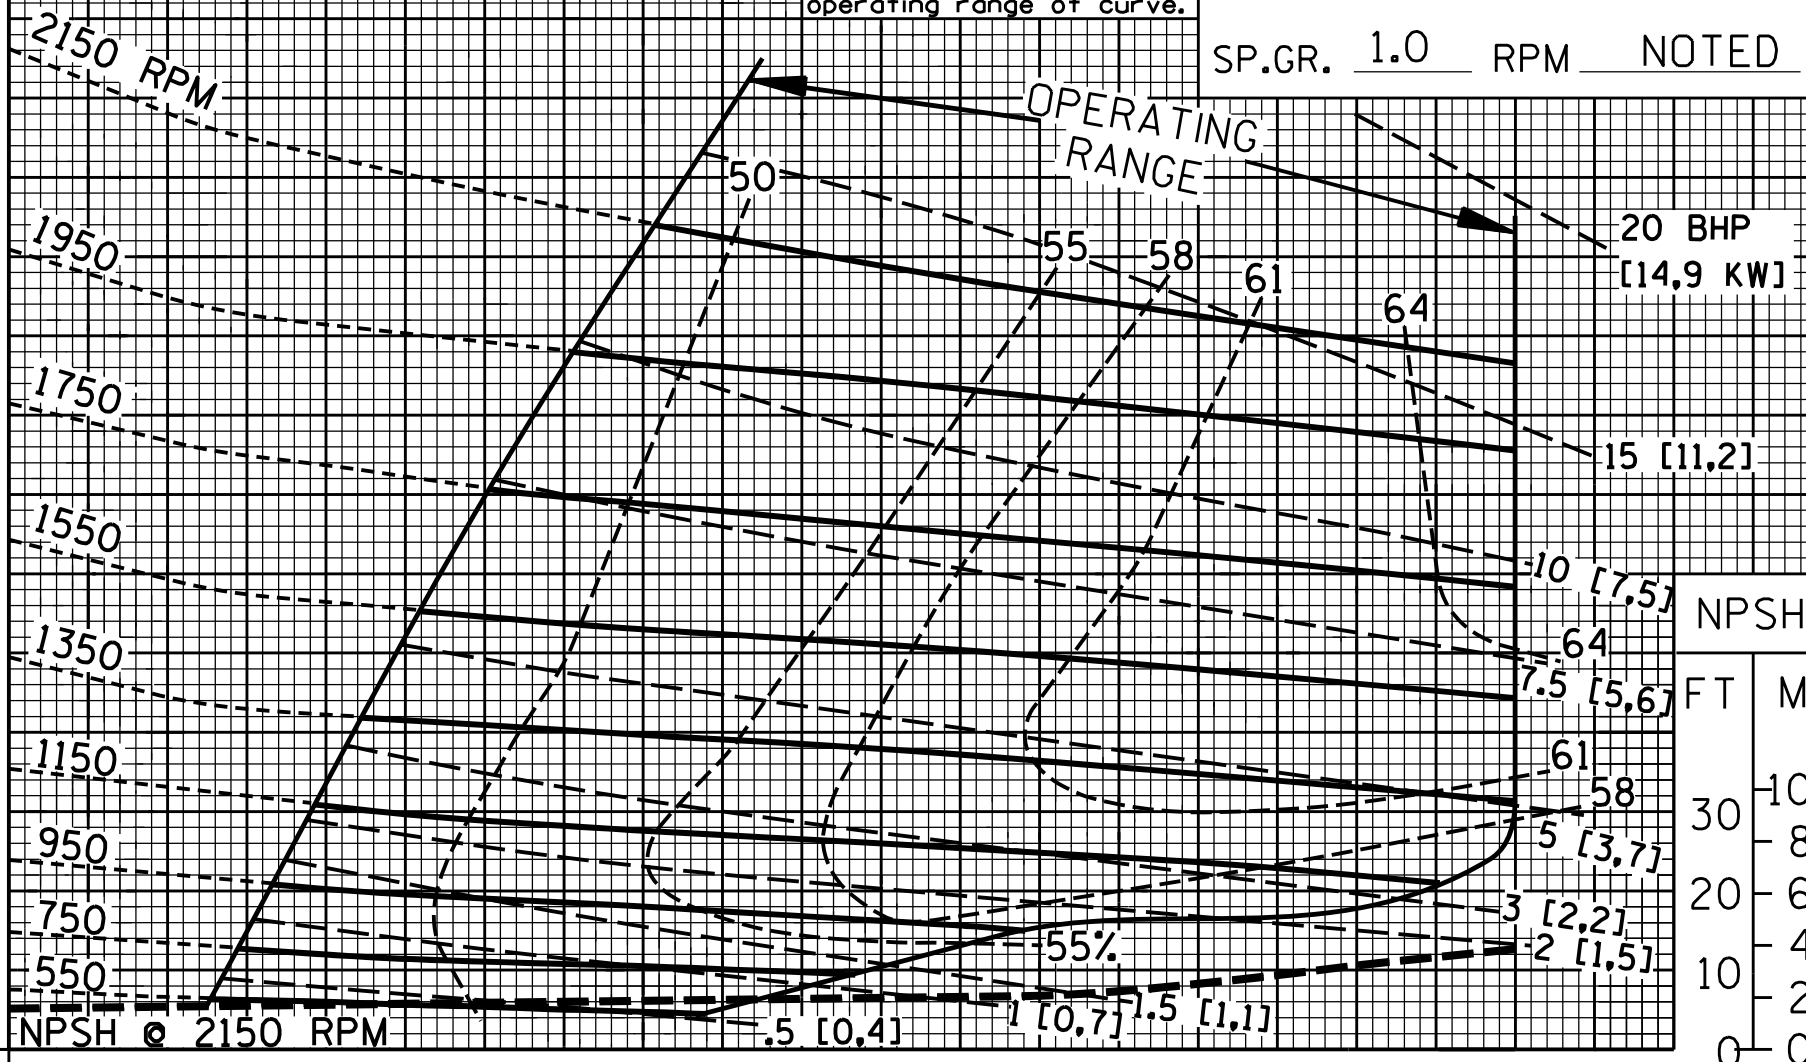

NPSH

FT M

10 8 6 4 2 0

