

TOTAL HEAD

M PSI FT

44
60
40
36
48
32
28
24
20
16
12
8
4
0

140
130
120
110
100
90
80
70
60
50
40
30
20
10
0


3.00"/[76.2 MM] DIA. MAX. SPHERICAL SOLIDS

Note:
Select performance within
operating range of curve.

PERFORMANCE CURVE

VOLUTE 38218-030 CURVE 6404A-B-1
 IMPELLER 10528 MODEL 6404A-B
 SIZE 6"X4" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1750

OPERATING RANGE

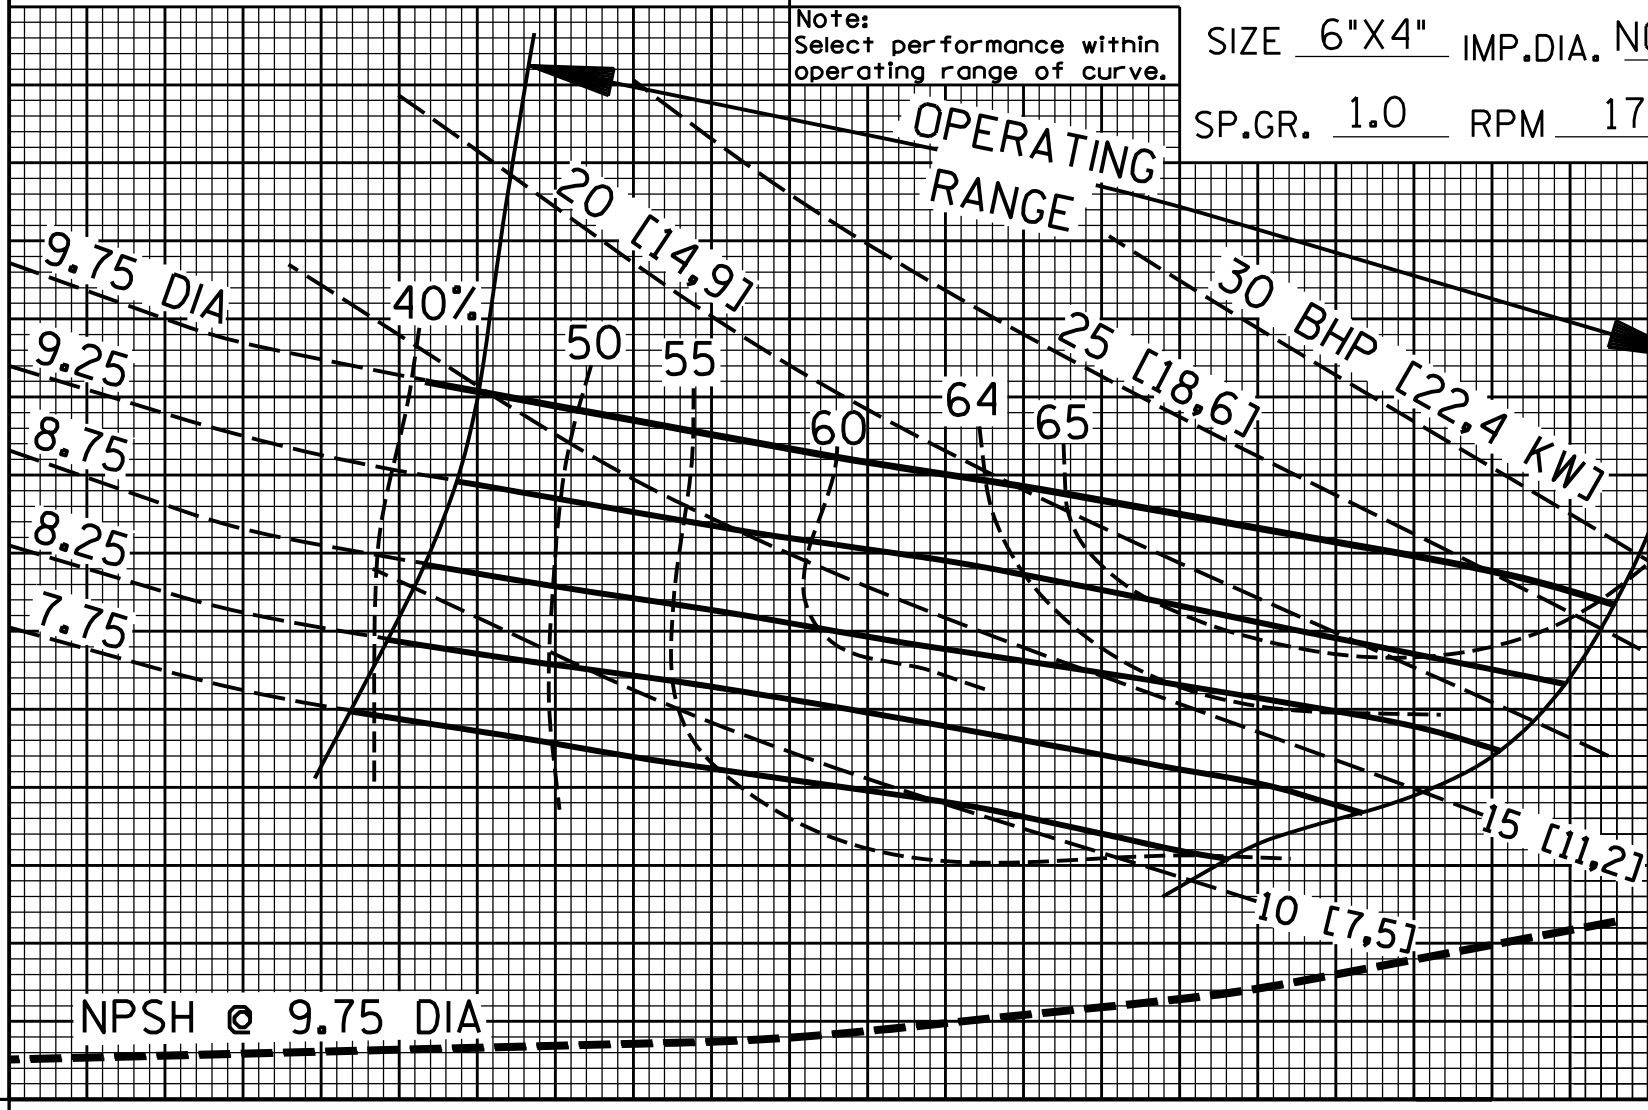

NPSH @ 9.75 DIA

NPSH
FT M

U.S.GALLONS PER MINUTE X 10

LITRES PER SECOND

CUBIC METRES PER HOUR X 10

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

