

TOTAL HEAD

M PSI FT

40 56 130

36 52 120

48 110

32 44 100

28 40 90

24 36 80

20 28 70

16 24 60

12 20 50

8 16 40

4 8 30

0 0 20

0 0 10

3.00"/[76.2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38218-030 CURVE 6404A-B-4

IMPELLER 10528 MODEL 6404A-B

SIZE 6"X4" IMP.DIA. 9.75"

SP.GR. 1.0 RPM NOTED

Note:
Select performance within
operating range of curve.

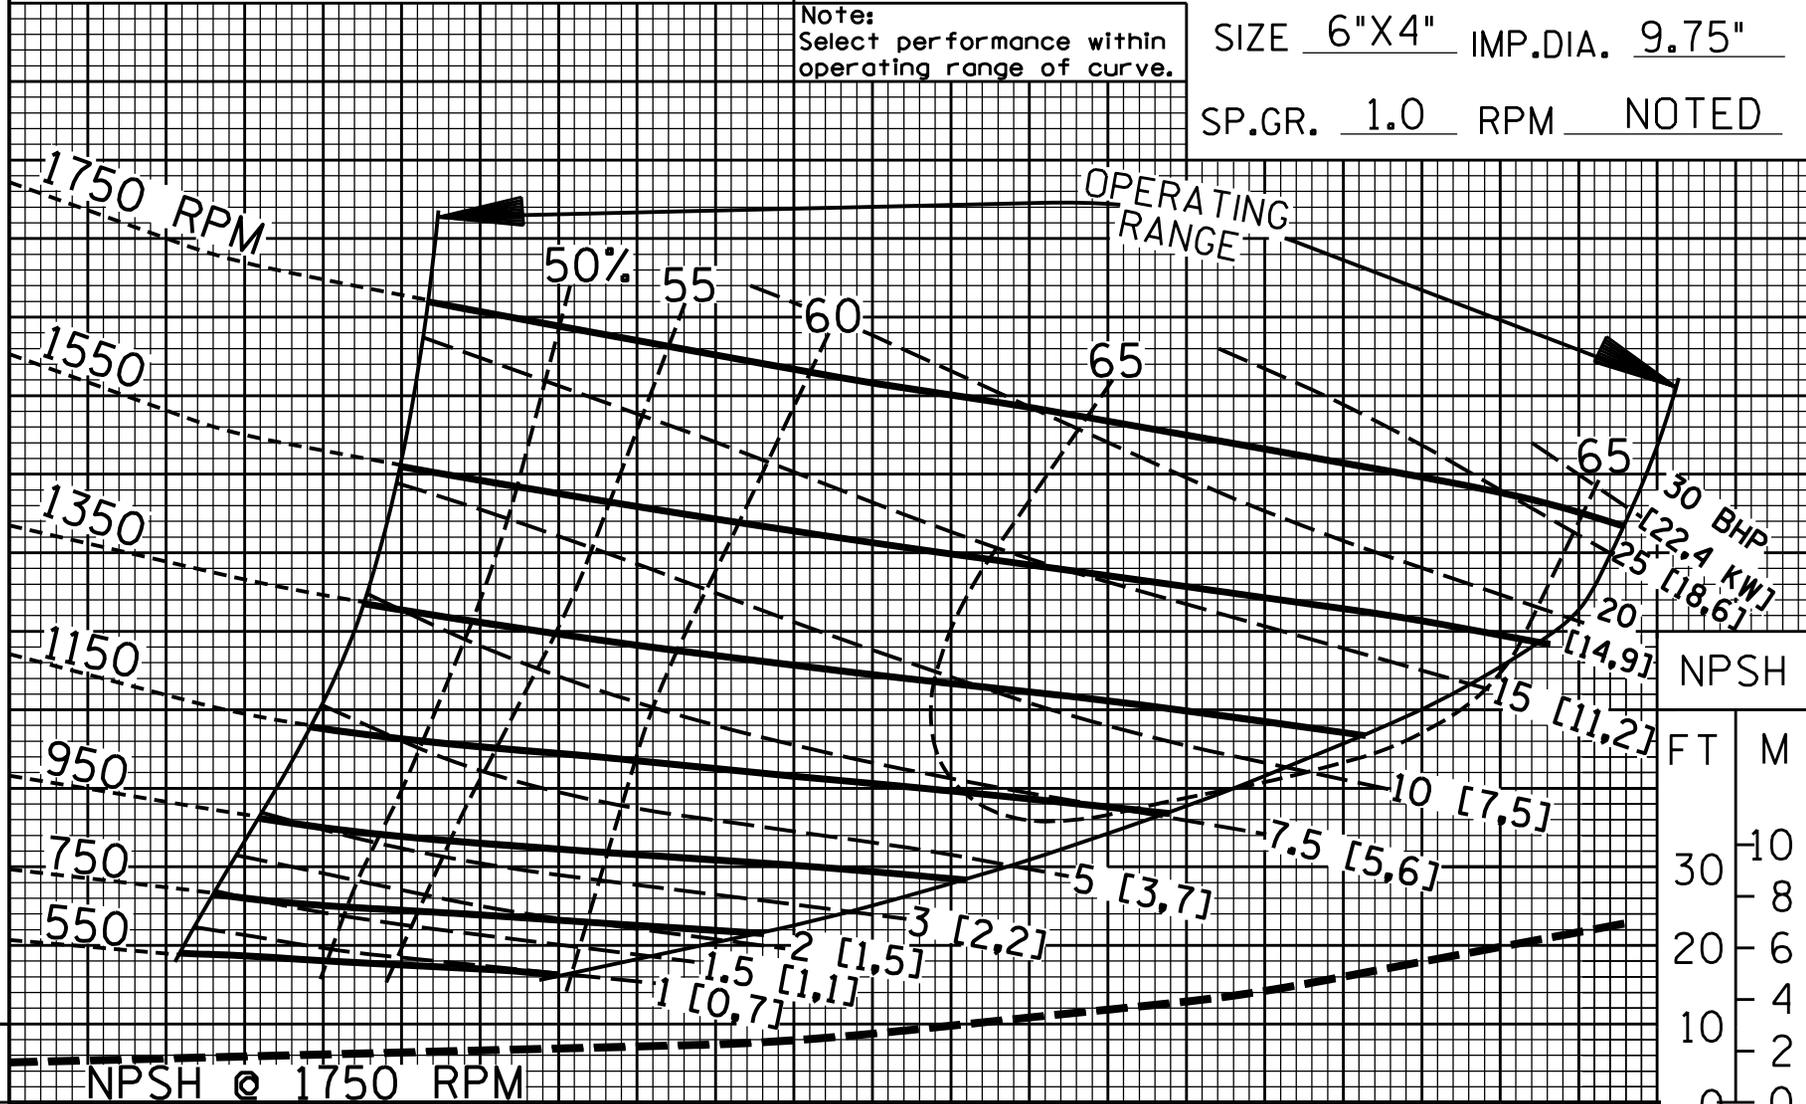

U.S.GALLONS PER MINUTE X 10

LITRES PER SECOND

CUBIC METRES PER HOUR X 10

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

0 10 20 30 40 50 60 70 80 90 100

0 2 4 6 8 10

0 2 4 6 8 10

0 2 4 6 8 10 12 14 16 18 20 22 24

0 2 4 6 8 10 12 14 16 18 20 22 24

