


TOTAL HEAD

PERFORMANCE CURVE

M PSI FT  
 22 32 75  
 20 30 70  
 18 28 65  
 16 26 60  
 14 24 55  
 12 22 50  
 10 20 45  
 8 18 40  
 6 16 35  
 4 14 30  
 2 12 25  
 0 10 20  
 0 8 15  
 0 6 10  
 0 4 5  
 0 0 0

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

VOLUTE 38218-030 CURVE 6404C-B-3  
 IMPELLER 10528 MODEL 6404C-B  
 Select performance within operating range of curve. SIZE 6"X4" IMP.DIA. NOTED  
 SP.GR. 1.0 RPM 1150

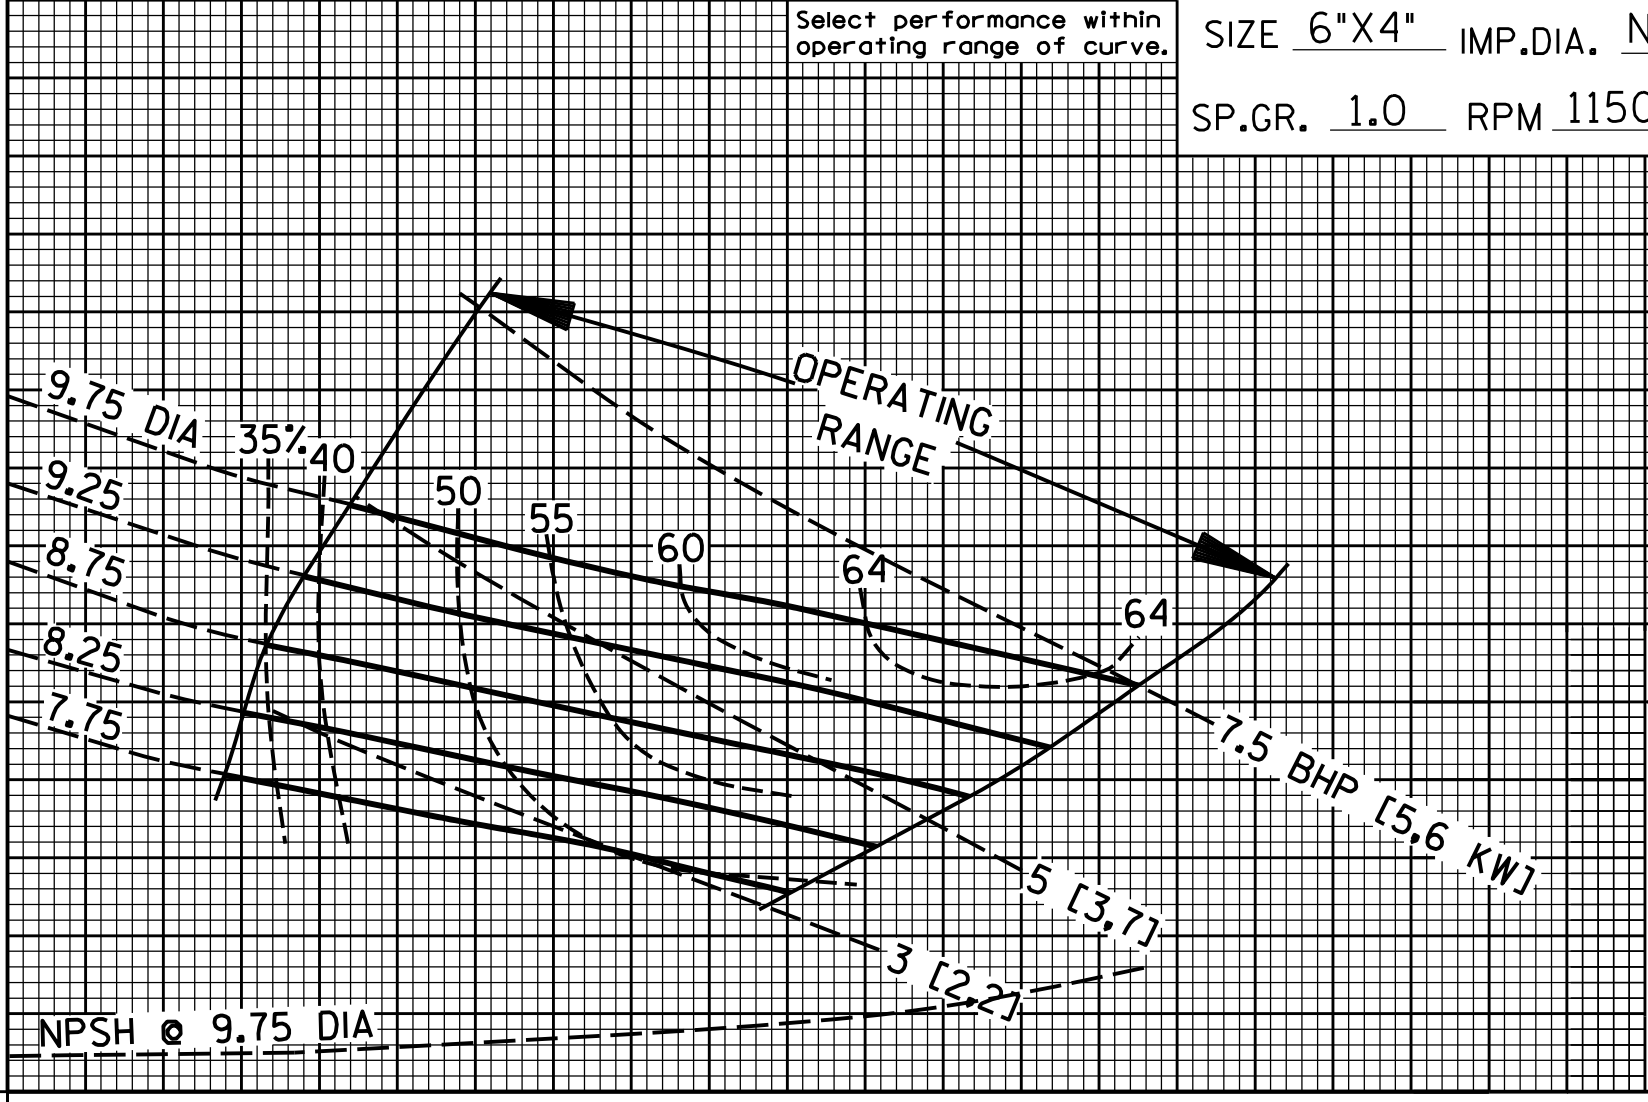

NPSH  
 FT M  
 30 10  
 20 8  
 10 6  
 0 4  
 0 2  
 0 0

U.S.GALLONS PER MINUTE X 10

LITRES PER SECOND

CUBIC METRES PER HOUR X 10

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100  
 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64  
 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

