

TOTAL HEAD

PERFORMANCE CURVE

2.25"/[57,2 MM] DIA. MAX SPHERICAL SOLIDS


VOLUTE 38218-027 CURVE 6406F-B-4

IMPELLER 38615-137 MODEL 6406F-B

SIZE 8"X6" IMP.DIA. 12.38"

SP.GR. 1.0 RPM NOTED

Note:
Select performance within
operating range of curve.

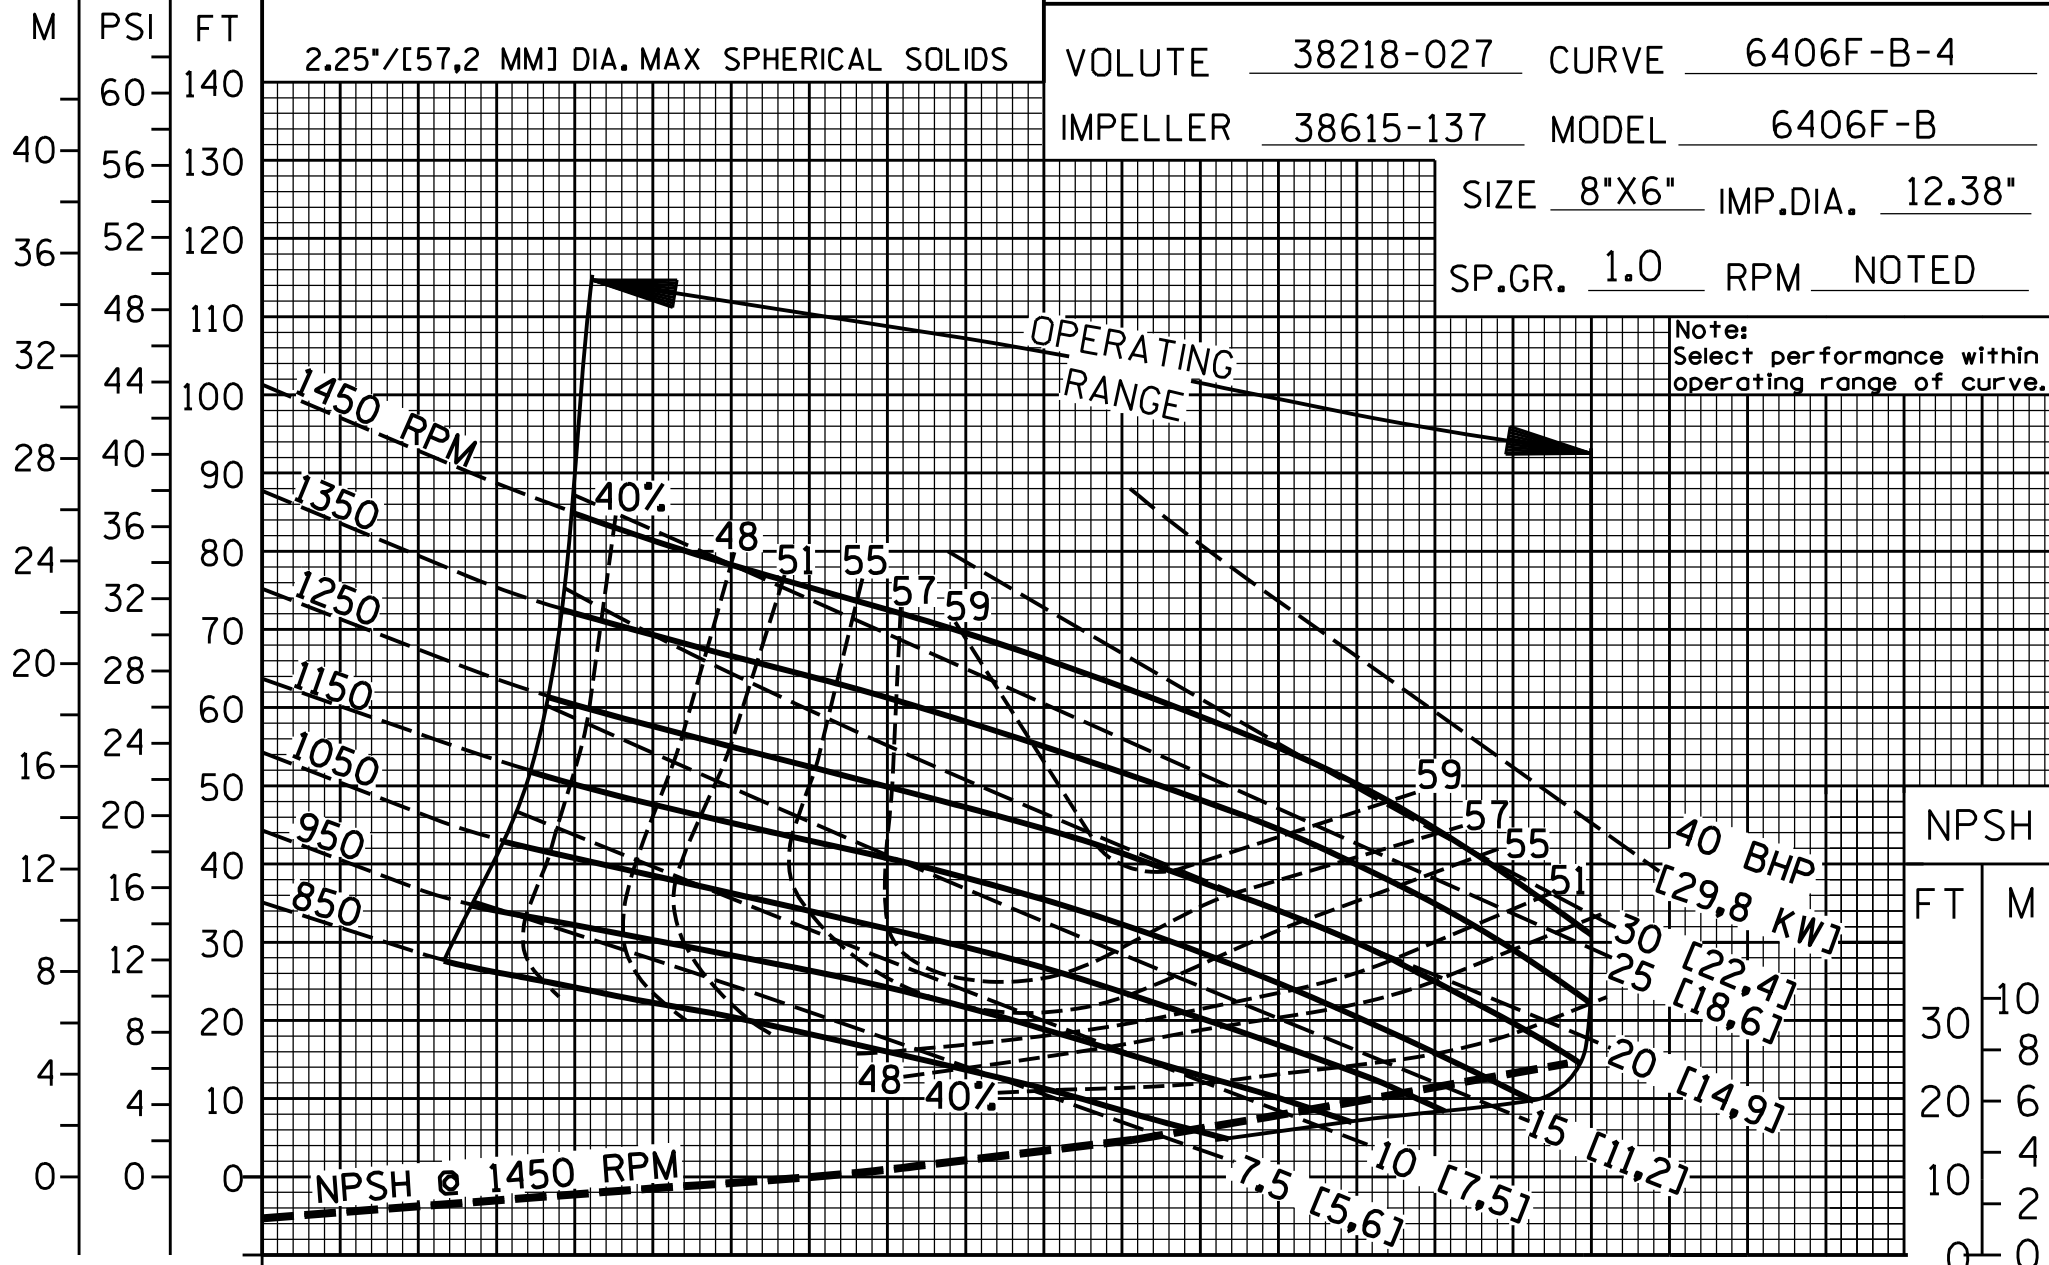

40 BHP
[29,8 KW]
30 [22,4]
25 [18,6]
20 [14,9]
15 [11,2]
10 [7,5]
7,5 [5,6]

NPSH
FT M
30 10
20 8
10 6
0 4
0 2
0 0

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

