


TOTAL HEAD USE JACK SHAFT ABOVE 2400 RPM ON V-BELT APPLICATIONS. PERFORMANCE CURVE

M
— 325
220
— 300
200
— 275
180
— 250
160
— 225
140
— 200
120
— 175
100
— 150
80
— 125
60
— 100
40
— 75
20
— 50
0

PSI
750
700
650
600
550
500
450
400
350
300
250
200
150
100
75
50
25
0

VOLUTE 7556 CURVE 64B-B-3
 IMPELLER 7555 MODEL 64B-B
 SIZE 6"X4" IMP.DIA. 14.00"
 SP.GR. 1.0 RPM NOTED

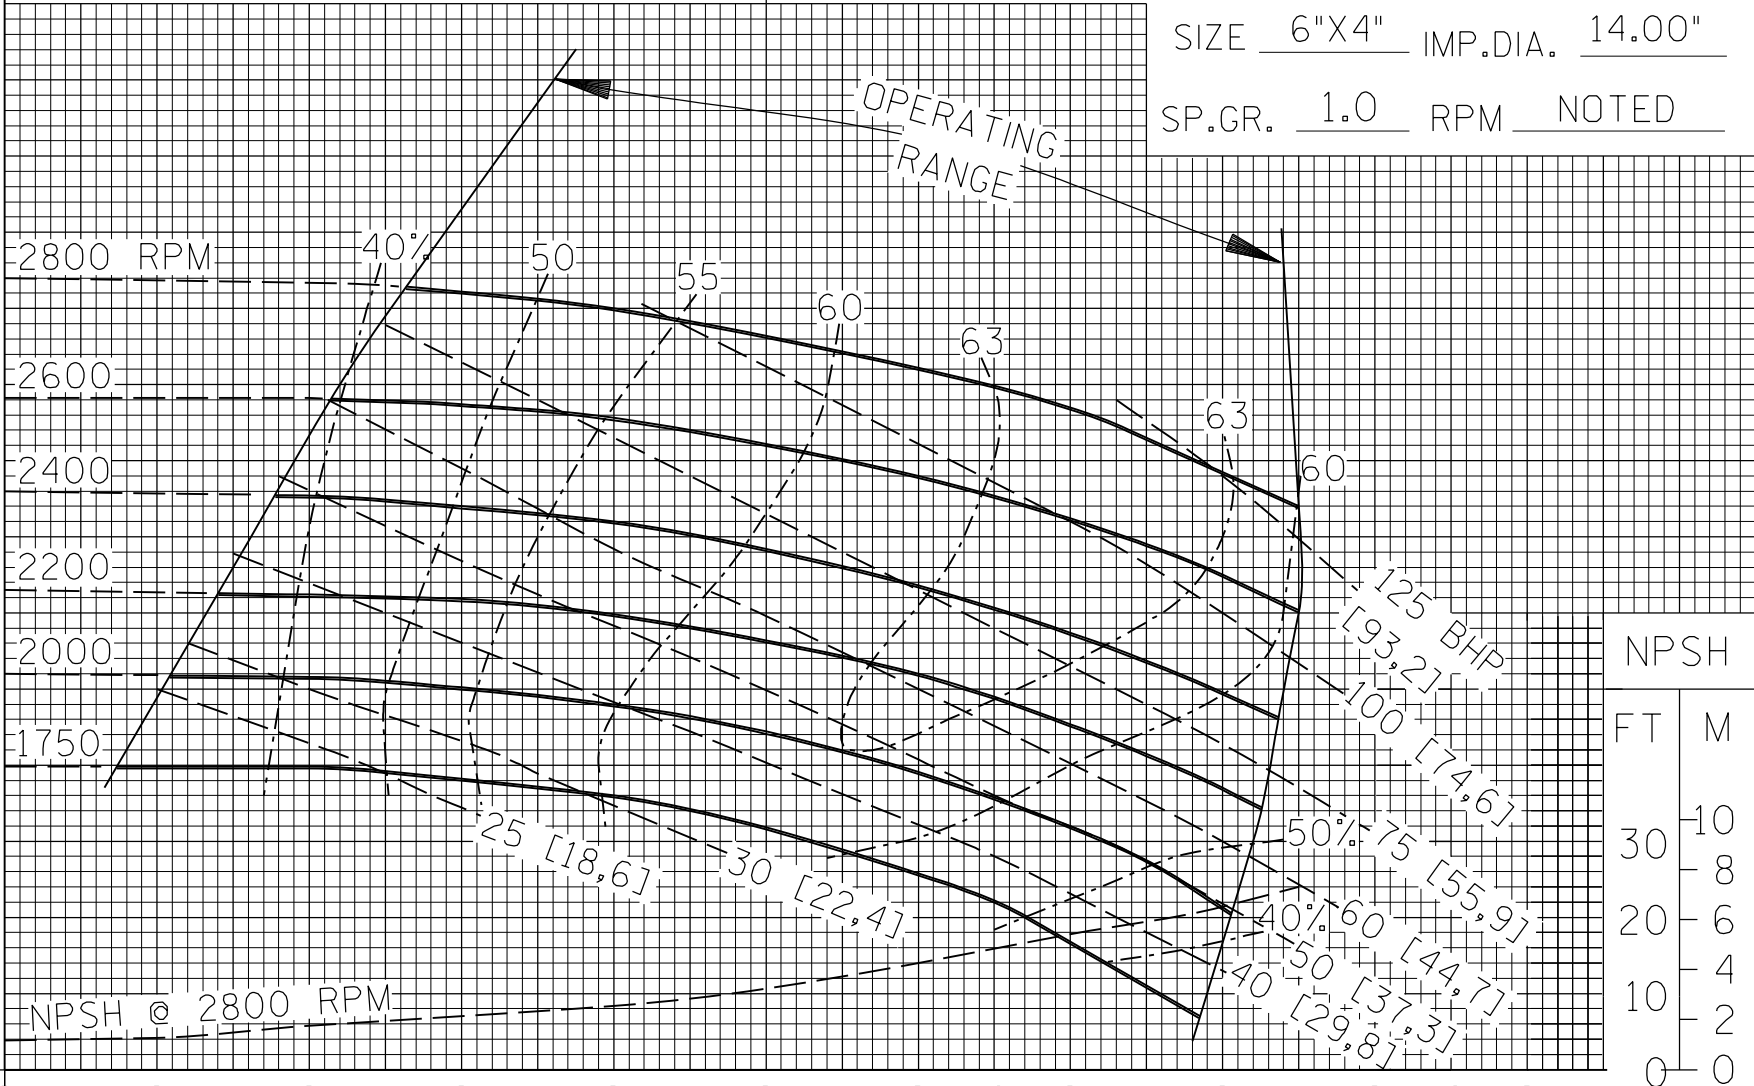

U.S. GALLONS PER MINUTE X 10
 LITRES PER SECOND
 CUBIC METRES PER HOUR X 10

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

NPSH
 FT M
 30 10
 20 8
 10 6
 0 4
 0 2
 0 0



T-1-15-R

FILE NO. 64bb.s03