


TOTAL HEAD

M PSI FT

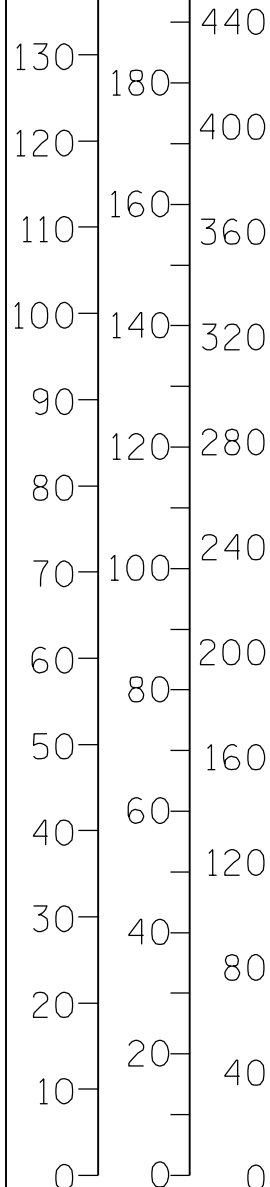



V-BELT GUIDELINES - 1800 RPM AND HIGHER			
SPEED - RPM	1800	2000	2200
MIN PUMP SHEAVE (IN)	7.00	8.50	10.00
MIN PUMP SHEAVE (MM)	177.8	215.9	254

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 38218-323 CURVE 6506C-B-1
 IMPELLER 38621-733 MODEL 6506C-B
 SIZE 8"X6" IMP.DIA. 14.25"
 SP.GR. 1.0 RPM NOTED


OPERATING RANGE

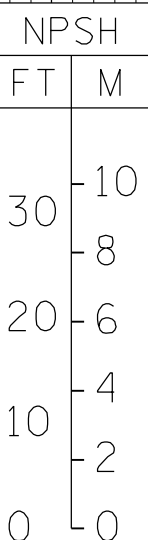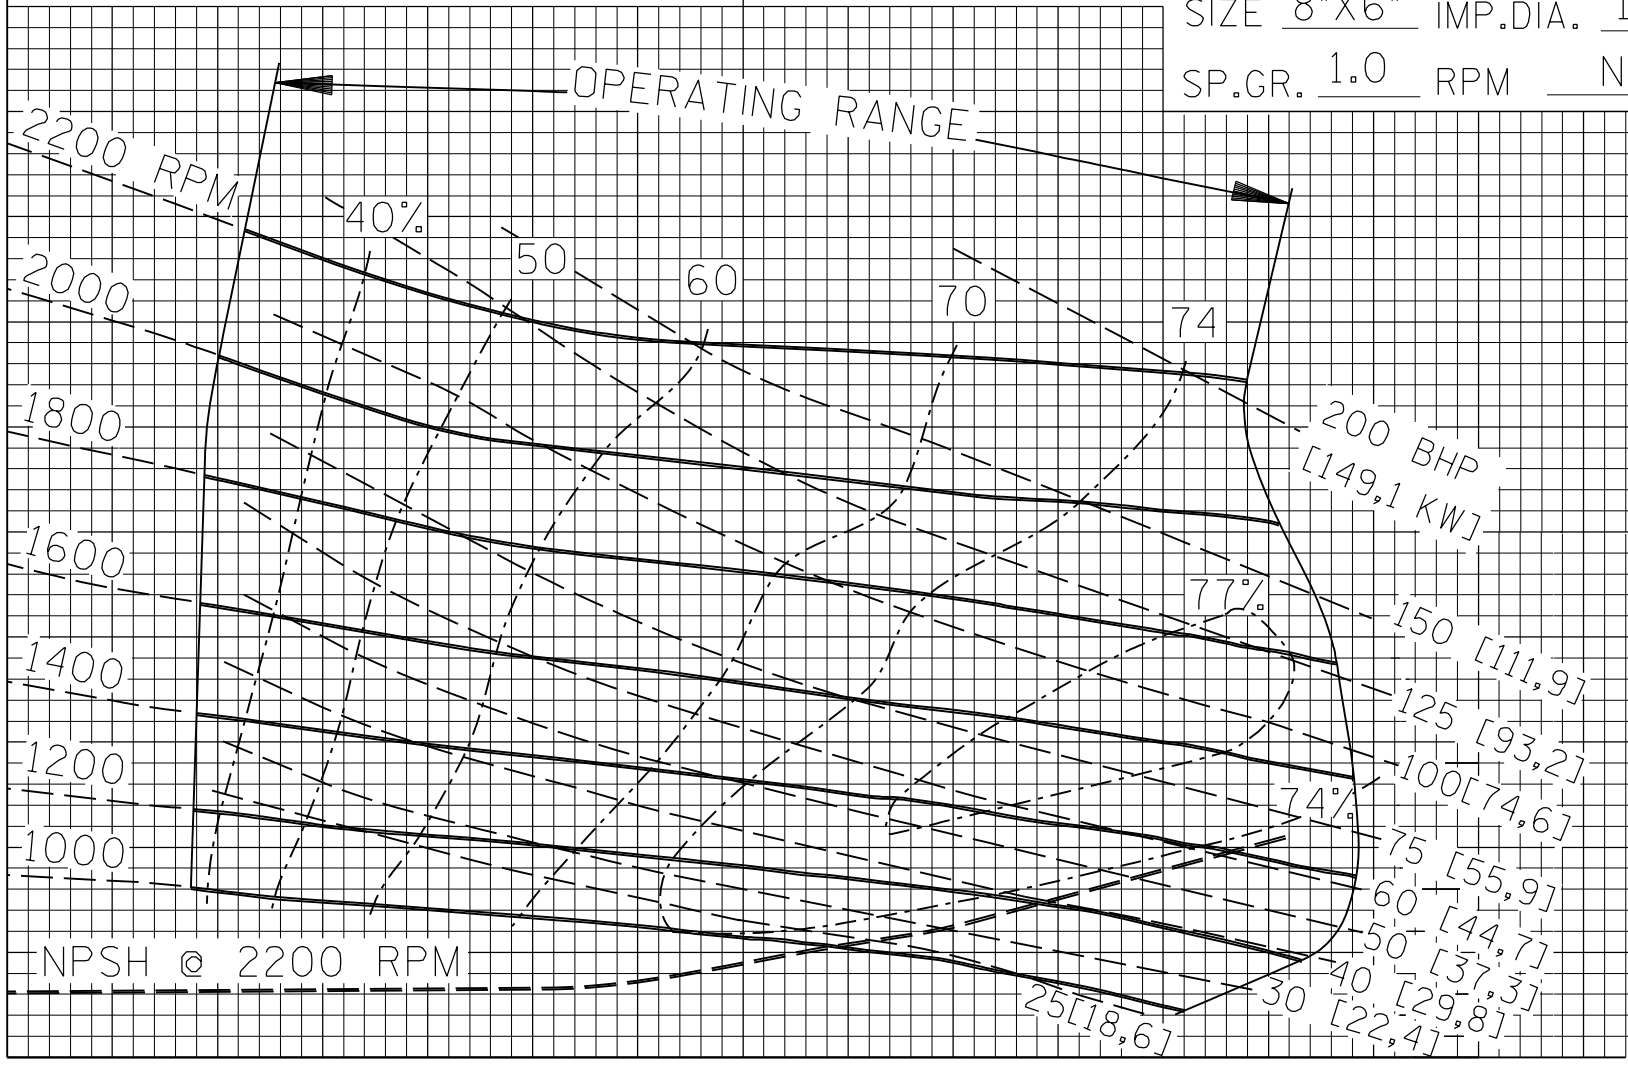

U.S. GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

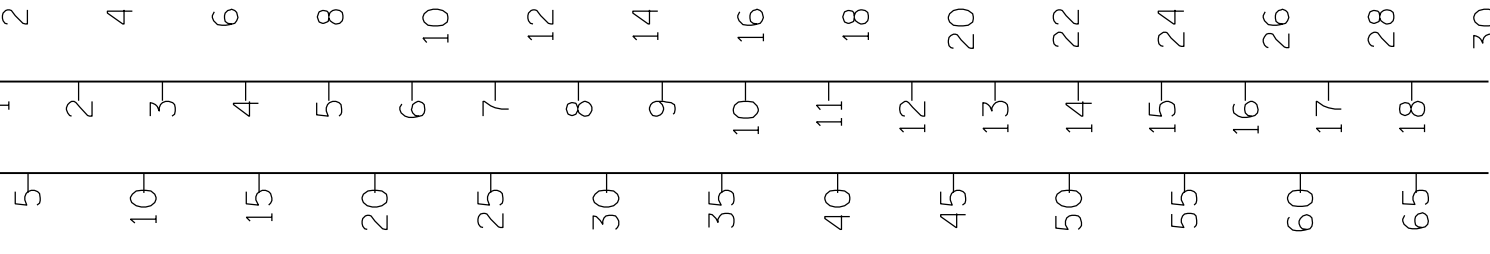

FILE NO. 6506cb.s01