

TOTAL HEAD

M PSI FT


V-BELT GUIDELINES - 13.00" DIA AND HIGHER			
IMPELLER - DIA	13.00	13.50	14.25
MIN PUMP SHEAVE (IN)	7.00	8.00	10.00
MIN PUMP SHEAVE (MM)	177.8	203.2	254

PERFORMANCE CURVE

VOLUTE 38218-323 CURVE 6506C-B-2
 IMPELLER 38621-733 MODEL 6506C-B
 SIZE 8"X6" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 2200

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

OPERATING RANGE

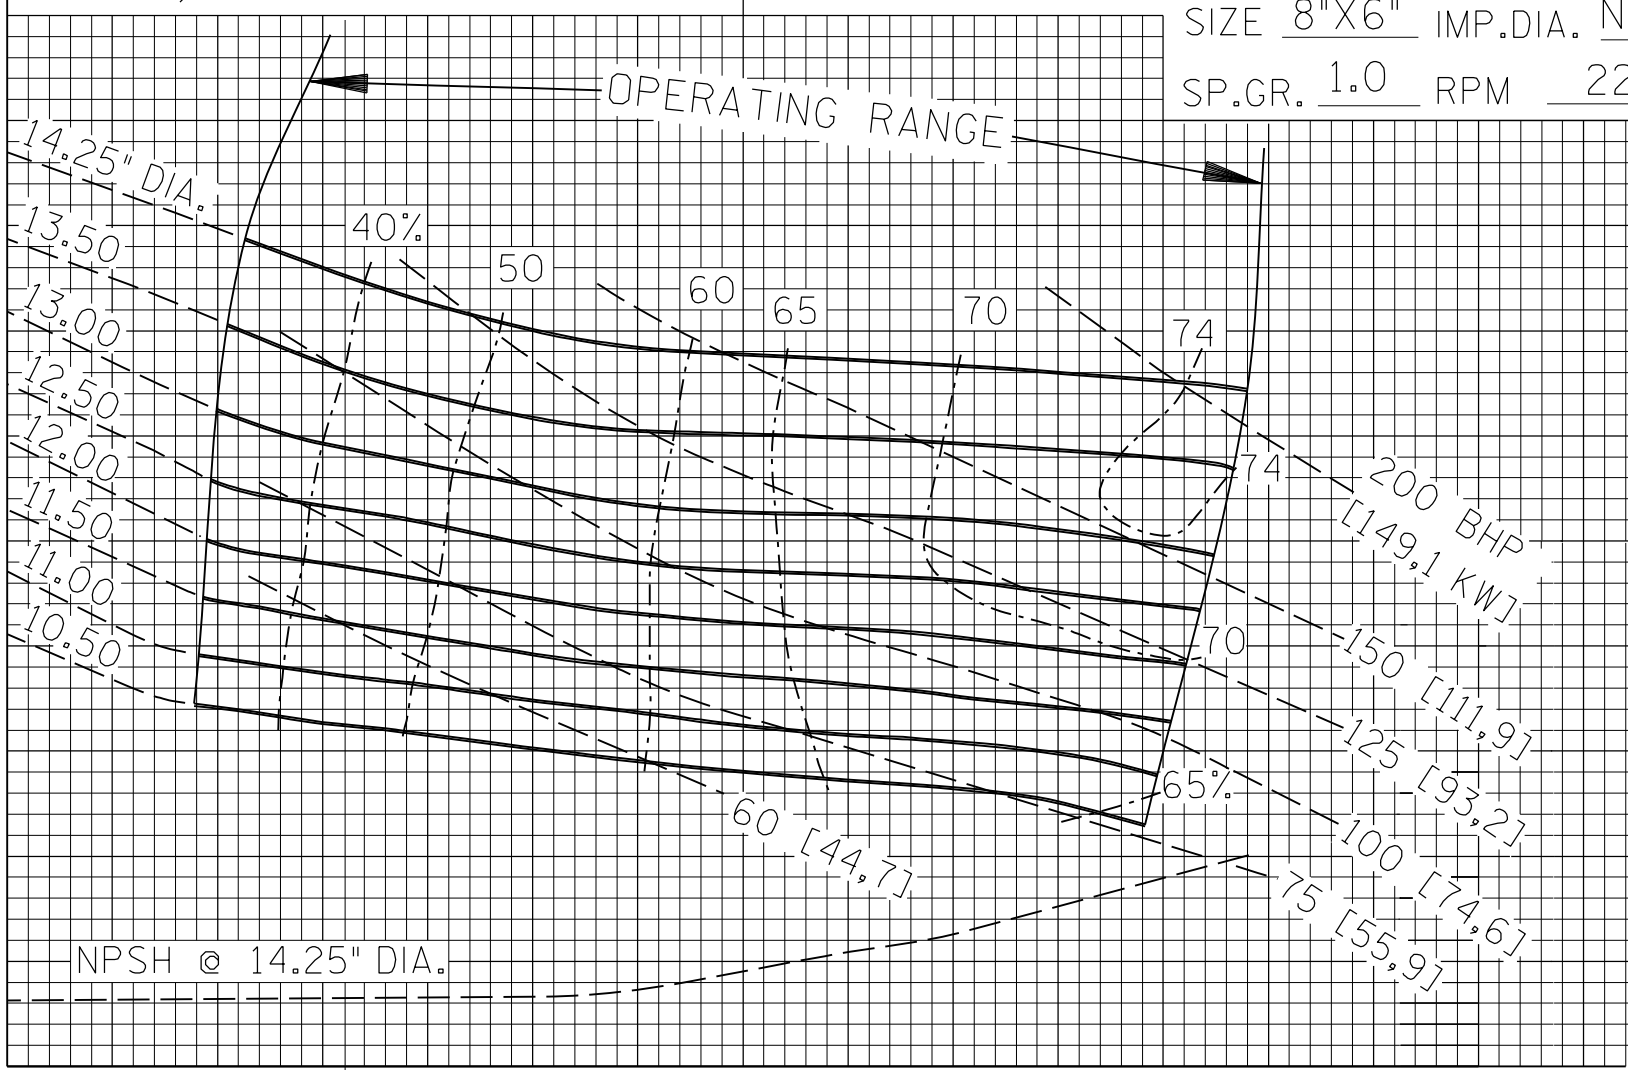

200 BHP [149,1 KW]
 150 [111,9]
 125 [93,2]
 100 [74,6]
 75 [55,9]

NPSH
 FT M
 30 10
 20 6
 10 4
 0 0

U.S. GALLONS PER MINUTE X 100
 LITRES PER SECOND X 10
 CUBIC METRES PER HOUR X 10



FILE NO. 6506cb.s02