


TOTAL HEAD

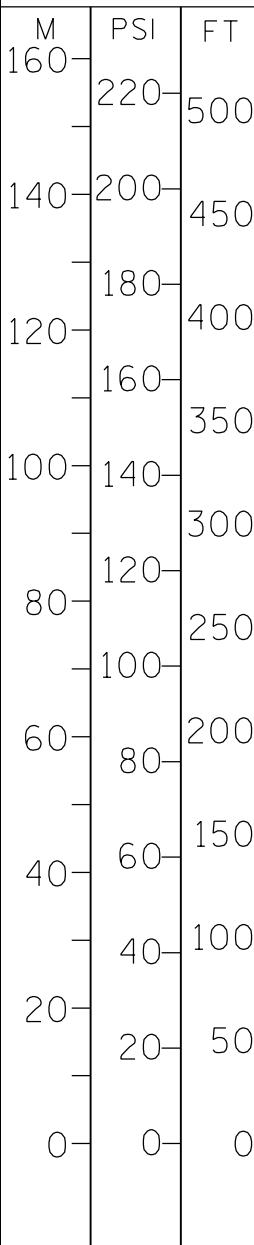


V-BELT GUIDELINES - 1600 RPM AND HIGHER			
SPEED - RPM	1600	1800	2000
MIN PUMP SHEAVE (IN)	10.00	13.00	16.00
MIN PUMP SHEAVE (MM)	254	330	406



1.25"/[31,8] MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 38218-325 CURVE 6506E-B-1
 IMPELLER 38622-521 MODEL 6506E-B
 SIZE 8"X6" IMP.DIA. 17.25"
 SP.GR. 1.0 RPM NOTED

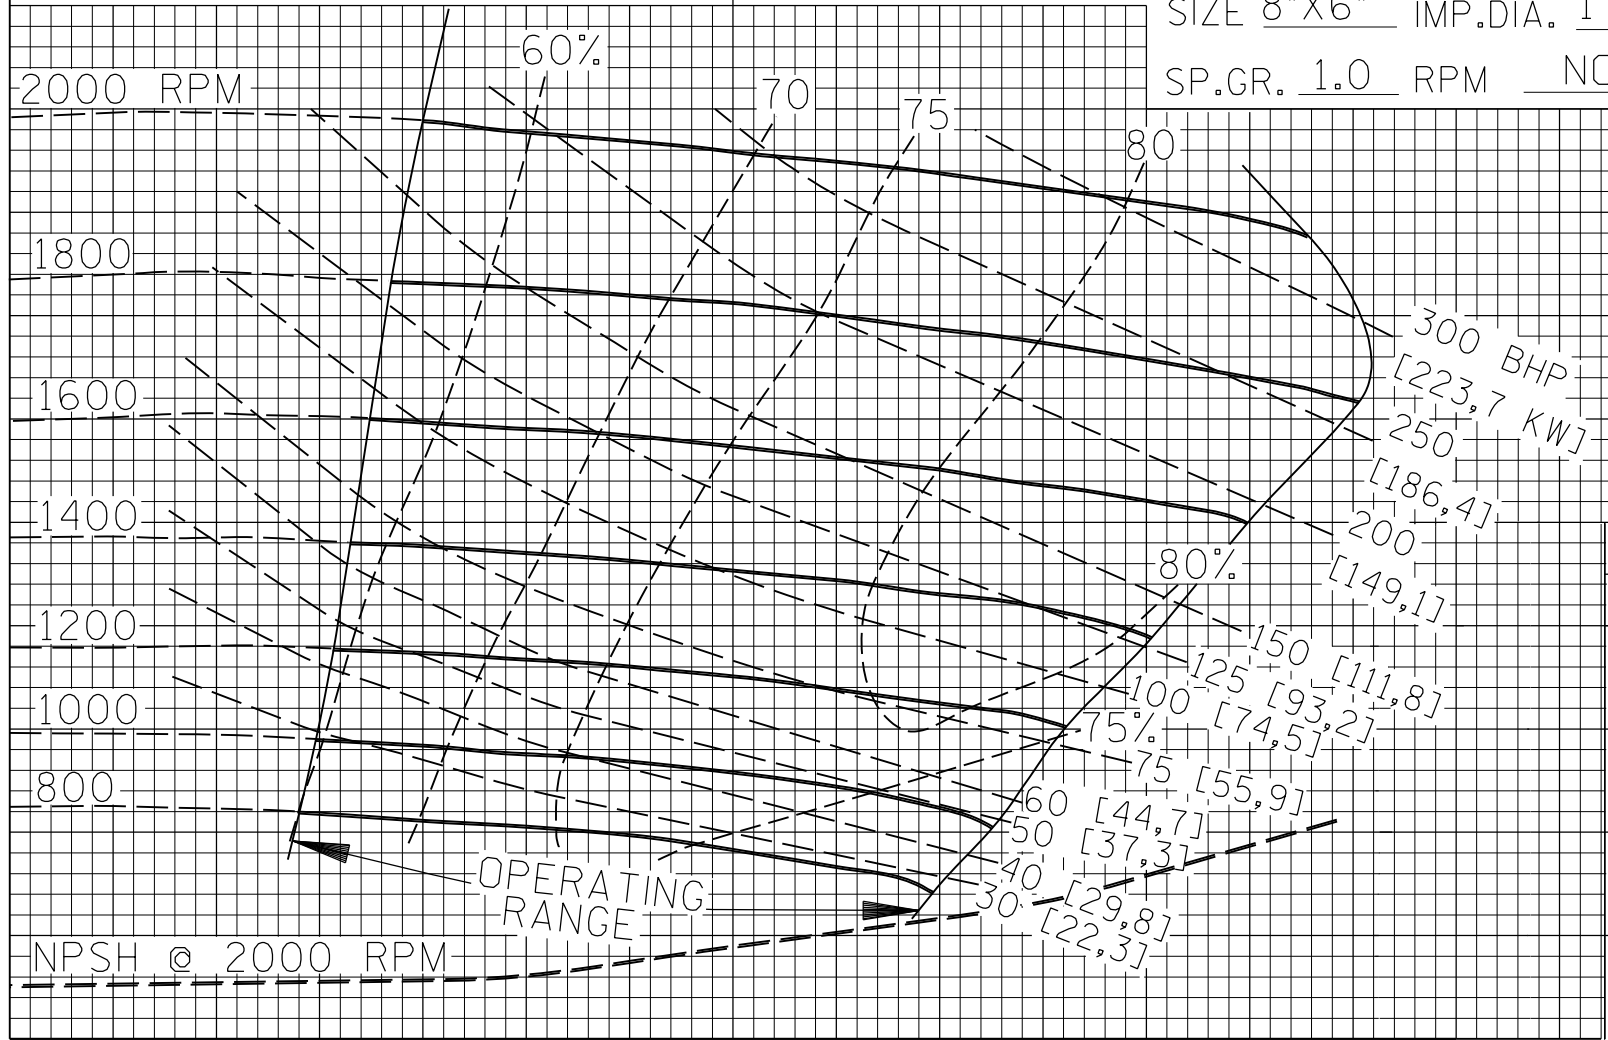

OPERATING RANGE

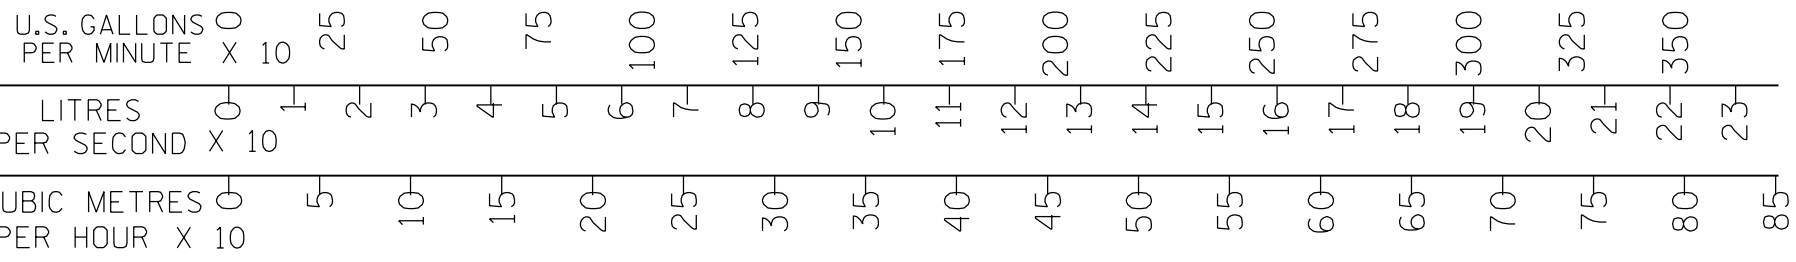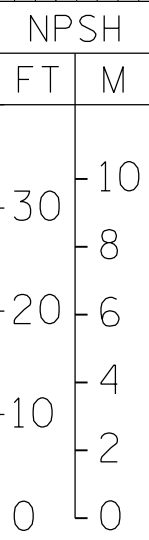

FILE NO. 6506EB.s01