

TOTAL HEAD

M PSI FT

V-BELT GUIDELINES - 1600 RPM AND HIGHER			
SPEED - RPM	15.25	16.25	17.25
MIN PUMP SHEAVE (IN)	9.00	11.00	13.00
MIN PUMP SHEAVE (MM)	229	279	330

PERFORMANCE CURVE


VOLUTE 38218-325 CURVE 6506E-B-2

IMPELLER 38622-521 MODEL 6506E-B

SIZE 8"X6" IMP.DIA. NOTED

SP.GR. 1.0 RPM 1800

1.25"/[31,8] MM] DIA. MAX. SPHERICAL SOLIDS

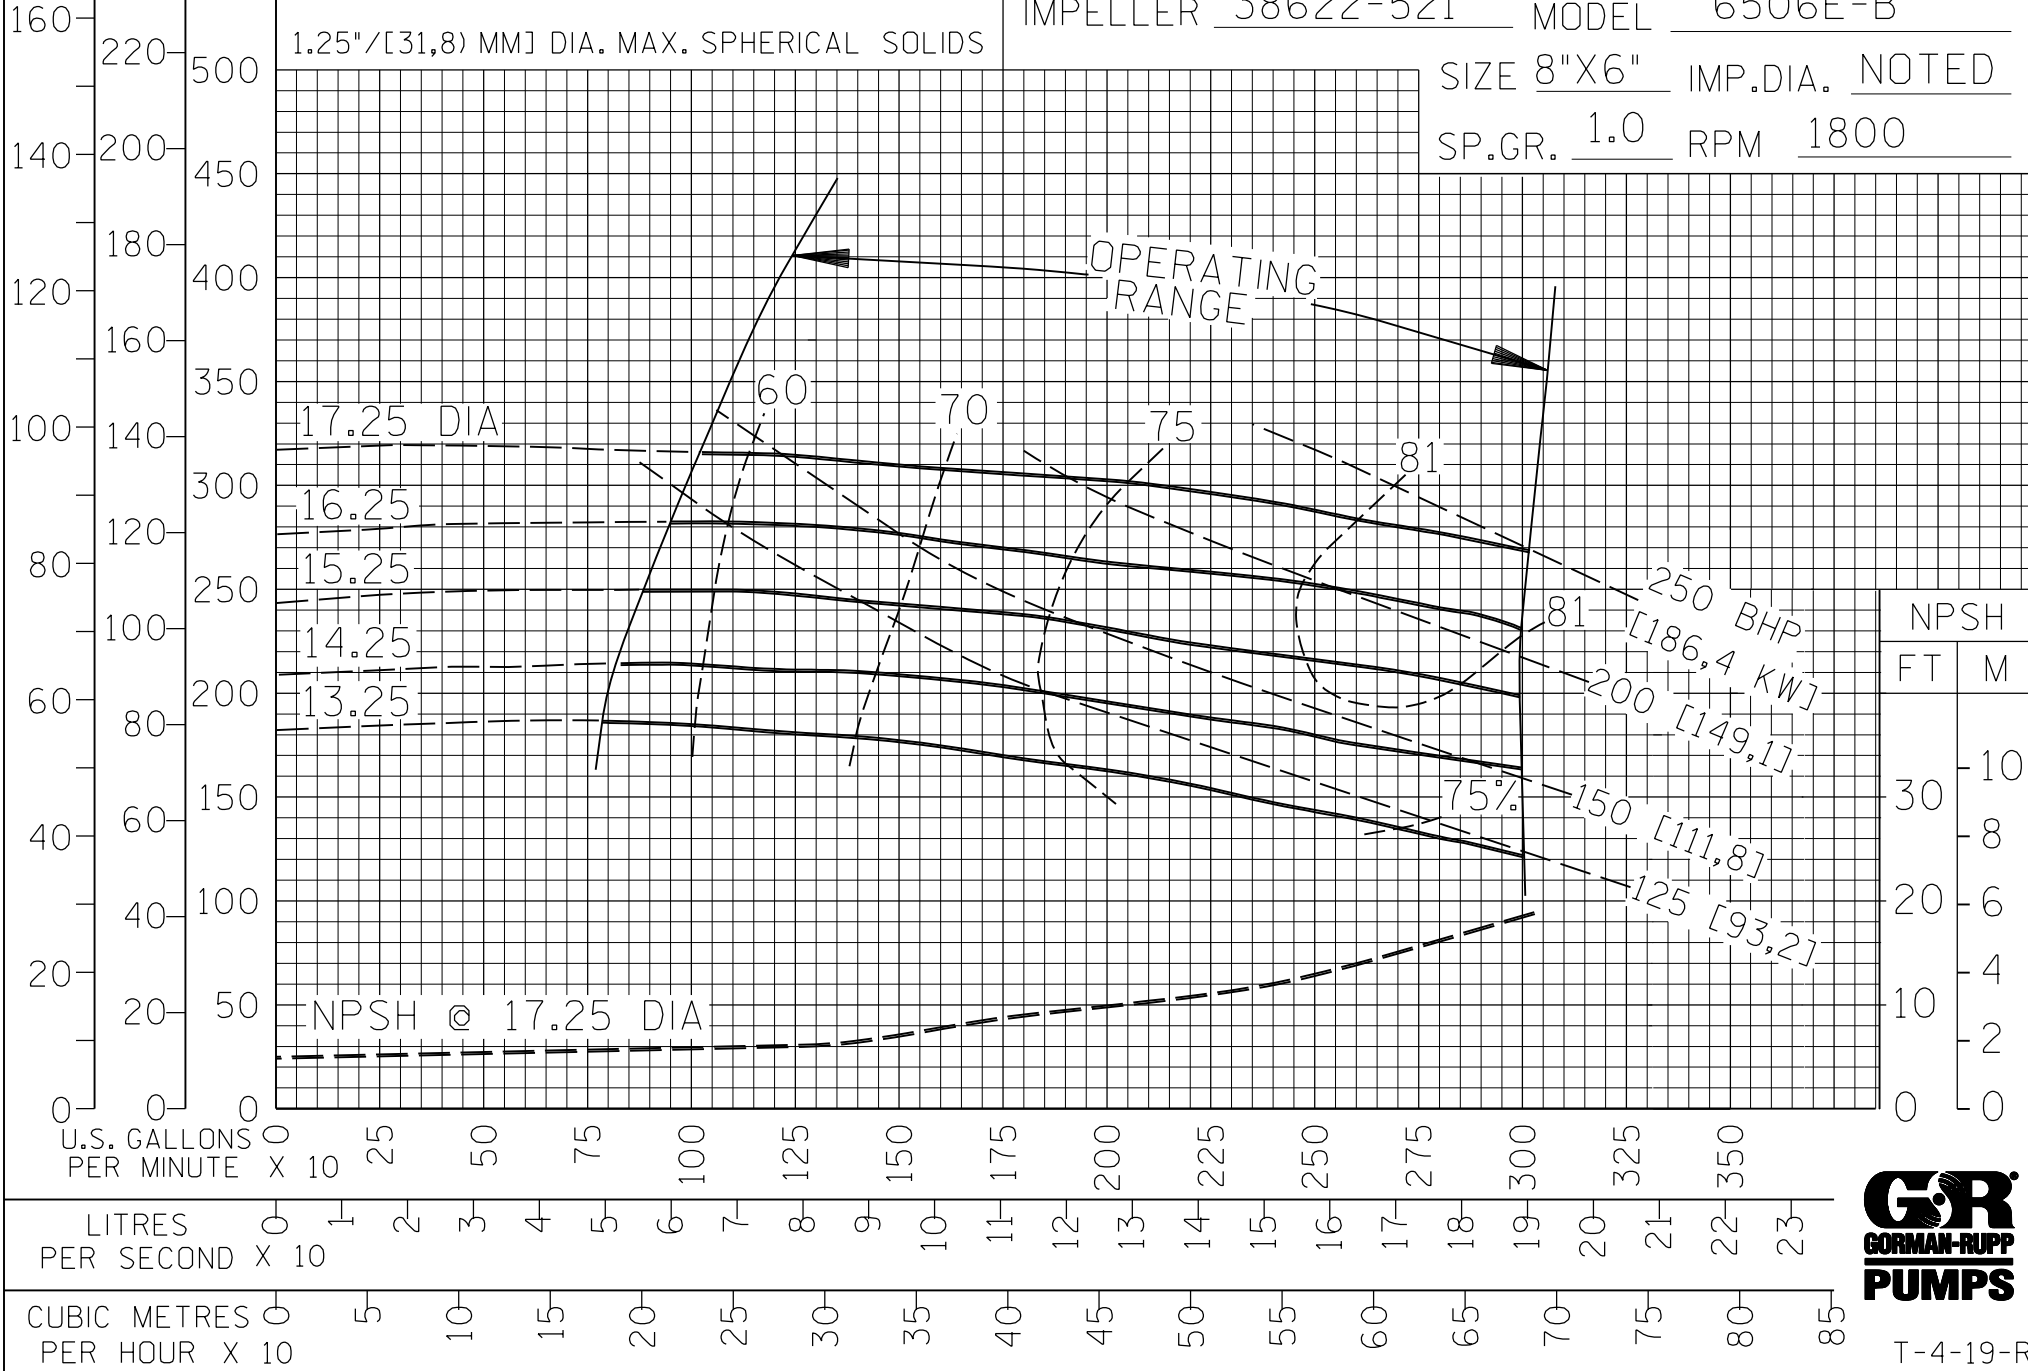

NPSH	
FT	M
0	0
10	3
20	6
30	9
40	12
50	15
60	18
70	21
80	24
90	27
100	30
110	33
120	36
130	39
140	42
150	45
160	48
170	51
180	54
190	57
200	60
210	63
220	66
230	69
240	72
250	75
260	78
270	81
280	84
290	87
300	90



T-4-19-R

FILE NO. 6506EB.s02