

TOTAL HEAD

M PSI FT

50 Hz.

PERFORMANCE CURVE

V-BELT GUIDELINES - 15.00" DIA AND HIGHER				
IMPELLER - DIA	15.00	16.00	17.00	17.75
MIN PUMP SHEAVE (IN)	8.00	10.00	16.00	17.00
MIN PUMP SHEAVE (MM)	203	254	406	432


VOLUTE 38218-306 CURVE 6508A-B-3

IMPELLER 38621-734 MODEL 6508A-B

SIZE 10"X8" IMP.DIA. NOTED

SP.GR. 1.0 RPM 1500

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

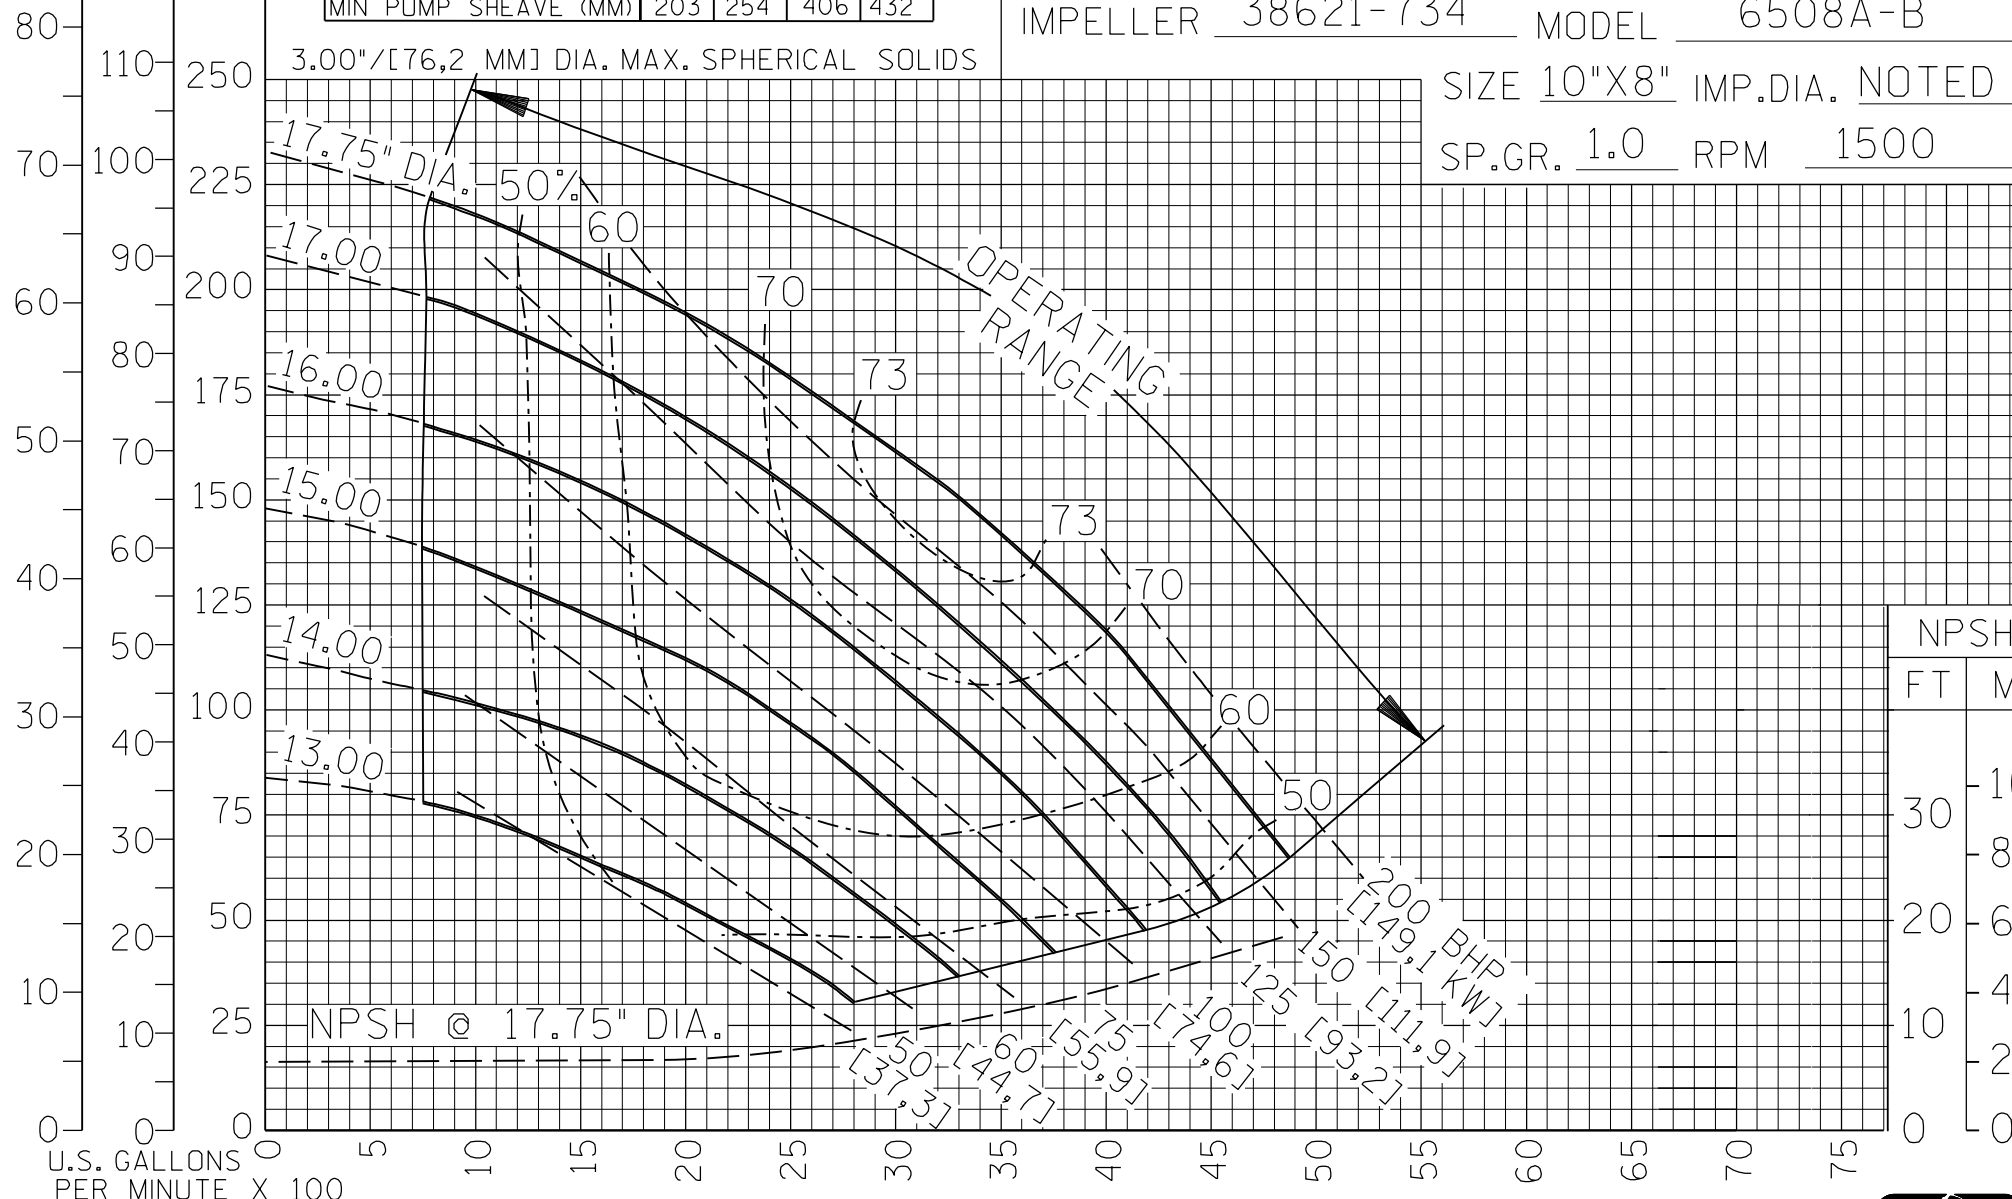

NPSH
FT M
30 10
20 8
10 6
0 4
0 2
0 0

LITRES PER SECOND X 10 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 17

CUBIC METRES PER HOUR X 100 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17



FILE NO. 6508ab.s03