


TOTAL HEAD

Max Operating Pressure 250 PSI  
Specify Plumbing Accordingly.

PERFORMANCE CURVE

M PSI FT  
200 275 650  
180 250 600  
160 225 550  
140 200 500  
120 175 450  
100 150 400  
80 125 350  
60 100 300  
40 75 250  
20 50 200  
0 25 150  
0 0 100

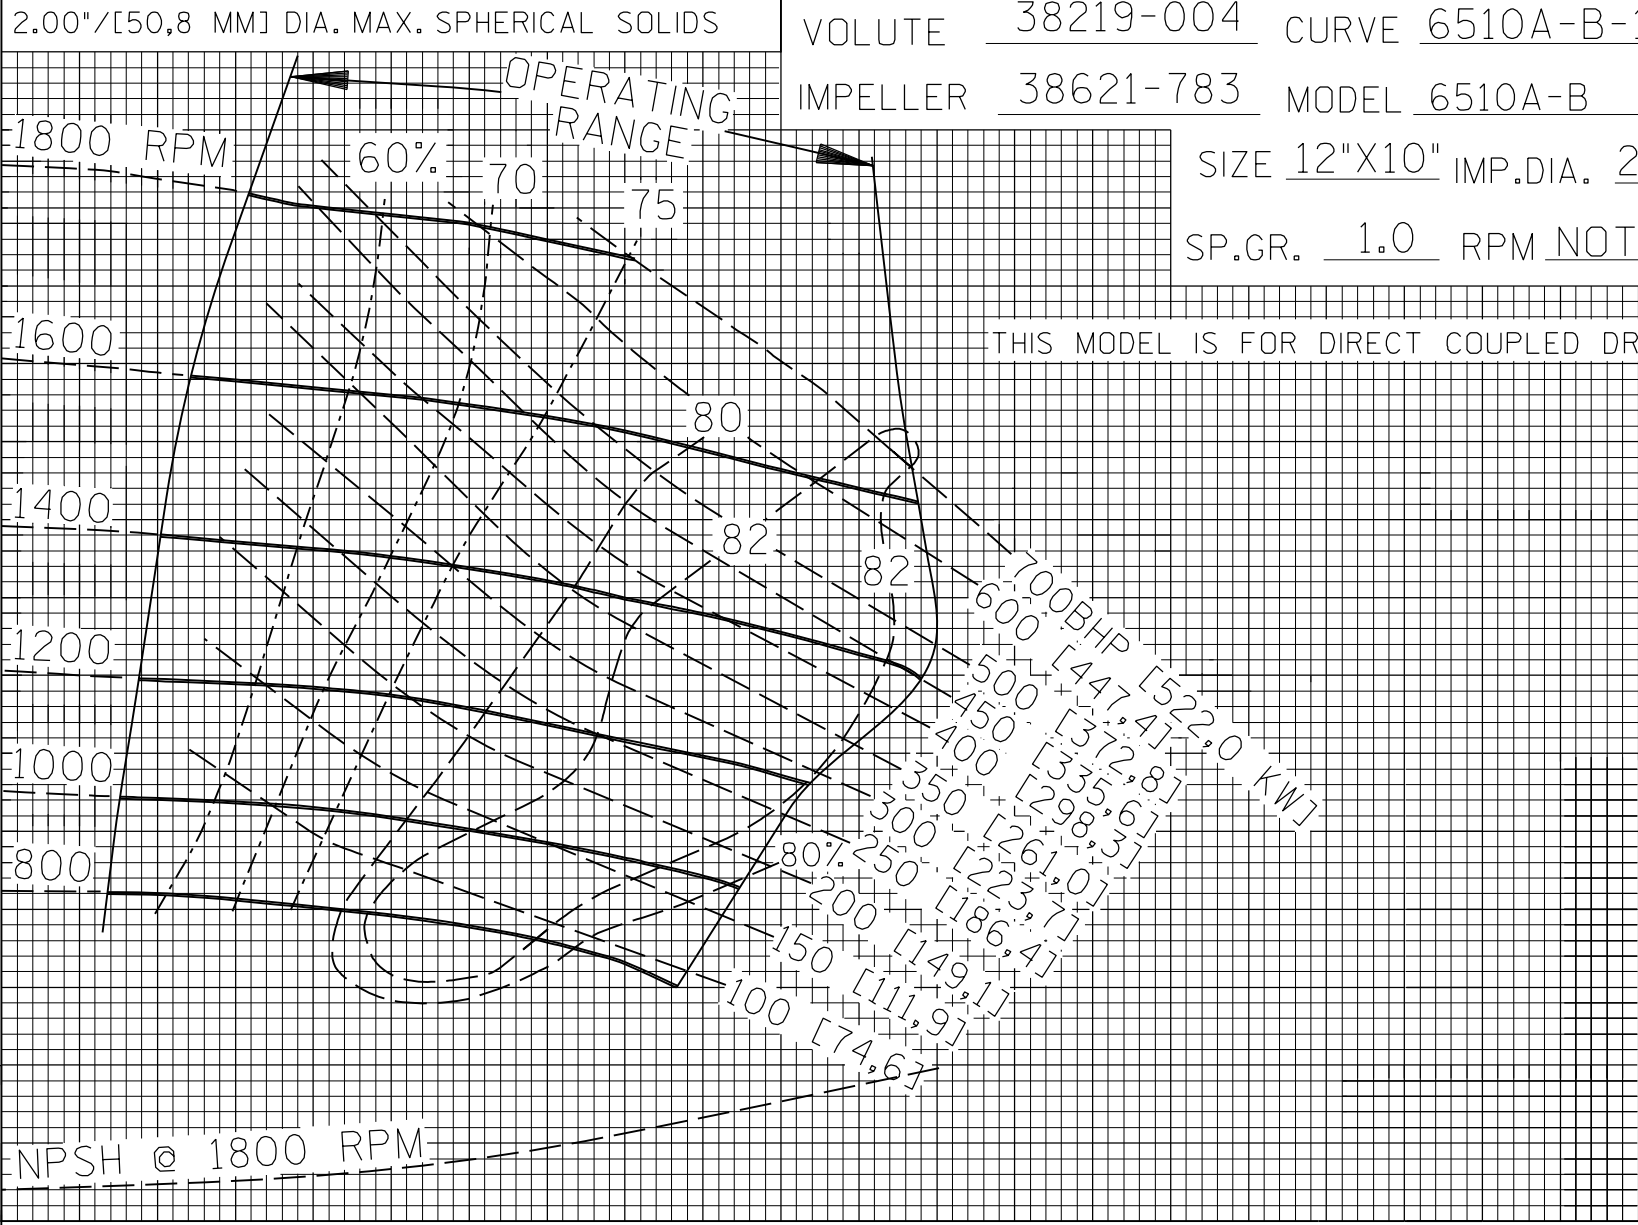

VOLUTE 38219-004 CURVE 6510A-B-1  
 IMPELLER 38621-783 MODEL 6510A-B  
 SIZE 12"X10" IMP.DIA. 22.50"  
 SP.GR. 1.0 RPM NOTED

THIS MODEL IS FOR DIRECT COUPLED DRIVE ONLY

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 100

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100  
 0 5 10 15 20 25 30 35 40 45 50 55 60 65  
 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

NPSH  
 FT M  
 30 10  
 20 8  
 10 6  
 0 4  
 0 2  
 0 0



C-9-15-R

FILE NO. 6510ab.s01