

TOTAL HEAD

V-BELT GUIDELINES - 2000 RPM AND HIGHER

SPEED - RPM	2000	2200	2400
MIN PUMP SHEAVE (IN)	6.00	7.00	9.00
MIN PUMP SHEAVE (MM)	152	178	229

PERFORMANCE CURVE

VOLUTE 38218-307 CURVE PAH3AC-B-1

IMPELLER 38623-532 MODEL PAH3AC-B

SIZE 6"X3" IMP.DIA. 15.50"


SP.GR. 1.0 RPM NOTED

NOTE: Add 2.5hp for belt driven air compressor.

Performance shown does not include discharge check valve losses.

Max Operating Pressure 250 PSI  
Specify Plumbing Accordingly.

.50"/[12,7 MM] DIA. MAX. SPHERICAL SOLIDS

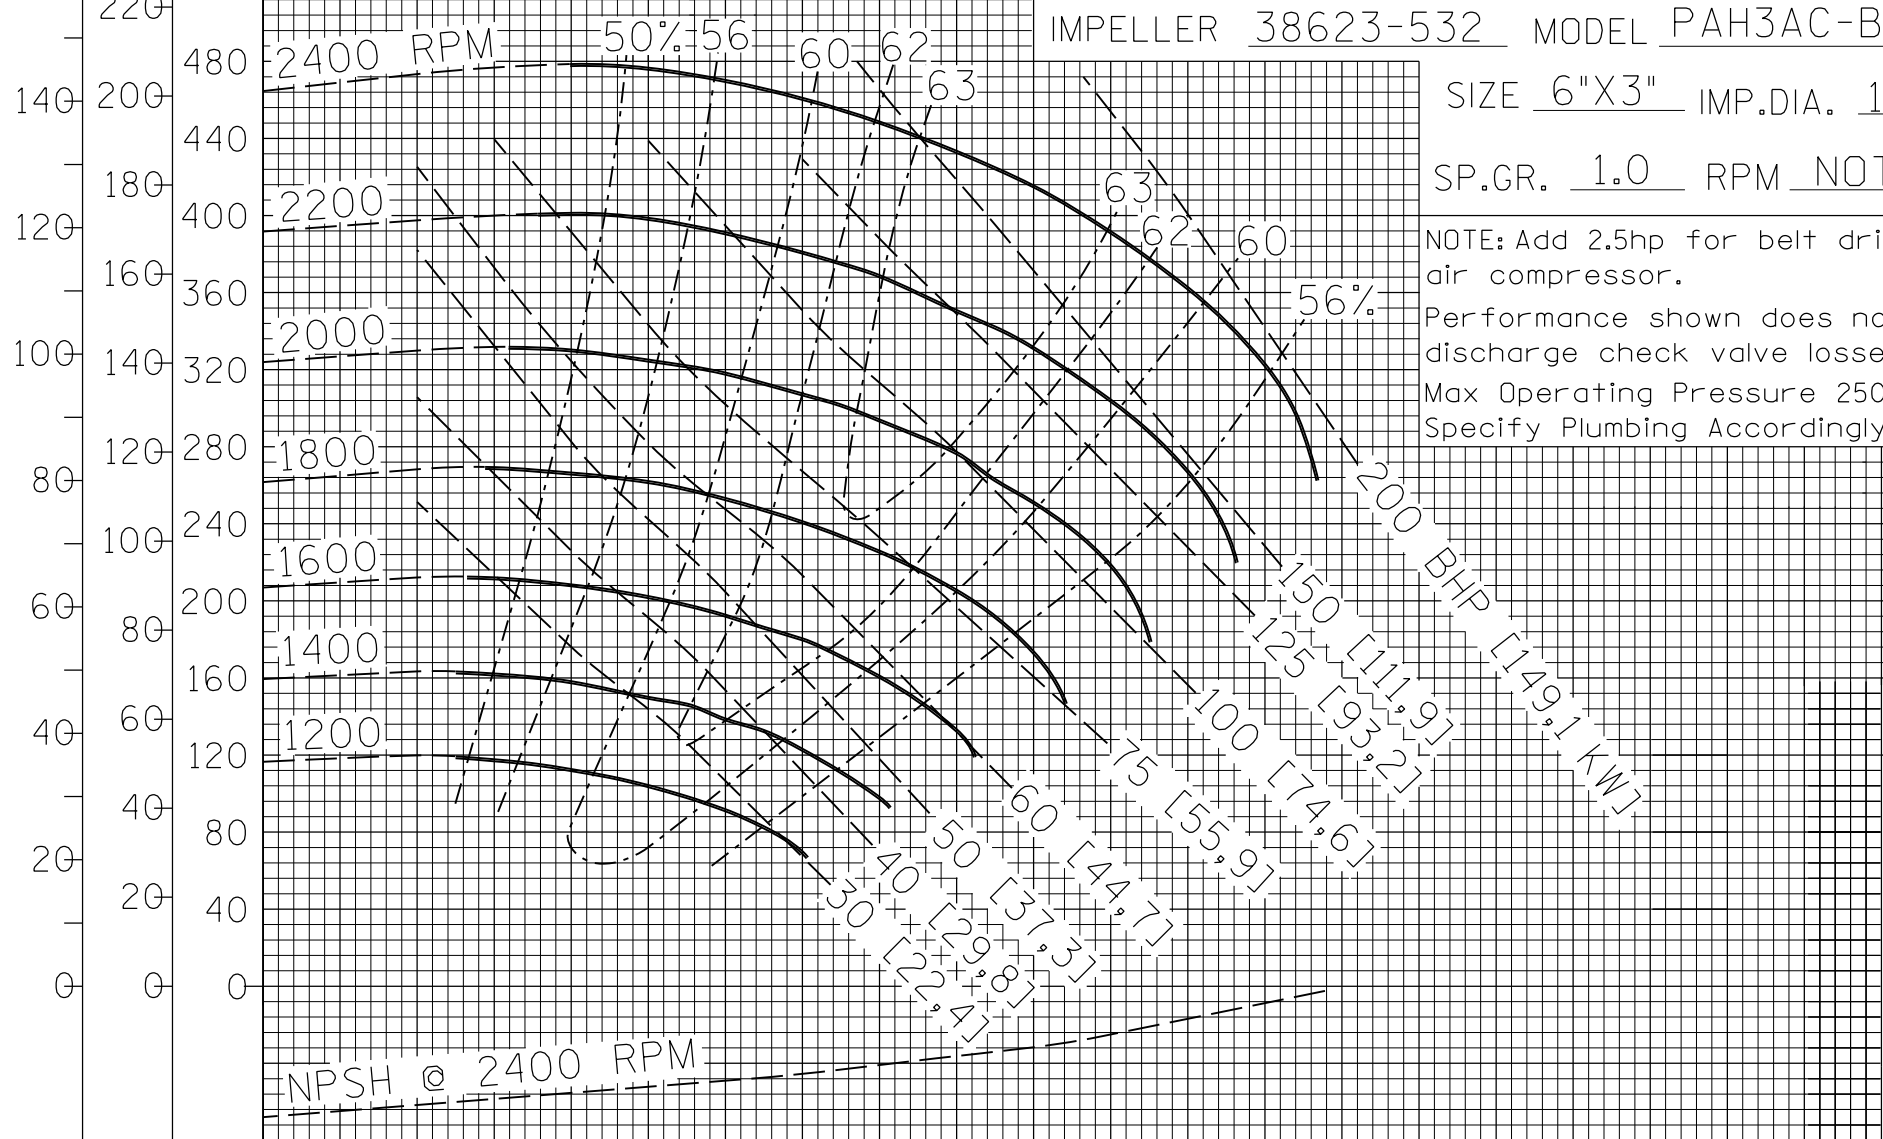

NPSH

FT	M
30	10
20	8
10	6
0	4
0	2
0	0

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10



T-3-13-R

FILE NO. PAH3ACB.s01