

TOTAL HEAD

REPRIMING LIFTS

DIA.	8.50"	8.75"	9"	9.25"-9.75"
FEET	20	22	23	25
METERS	6,1	6,7	7	7,6

Figure NPSH required prior to using above table.
 DO NOT use as available Suction Lifts.
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS


PERFORMANCE CURVE

VOLUTE 10525D
 10525B CURVE T4A-B-1

IMPELLER 10528 MODEL T4A-B

Note:
 Select performance within
 operating range of curve.

SIZE 4"X4" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1750

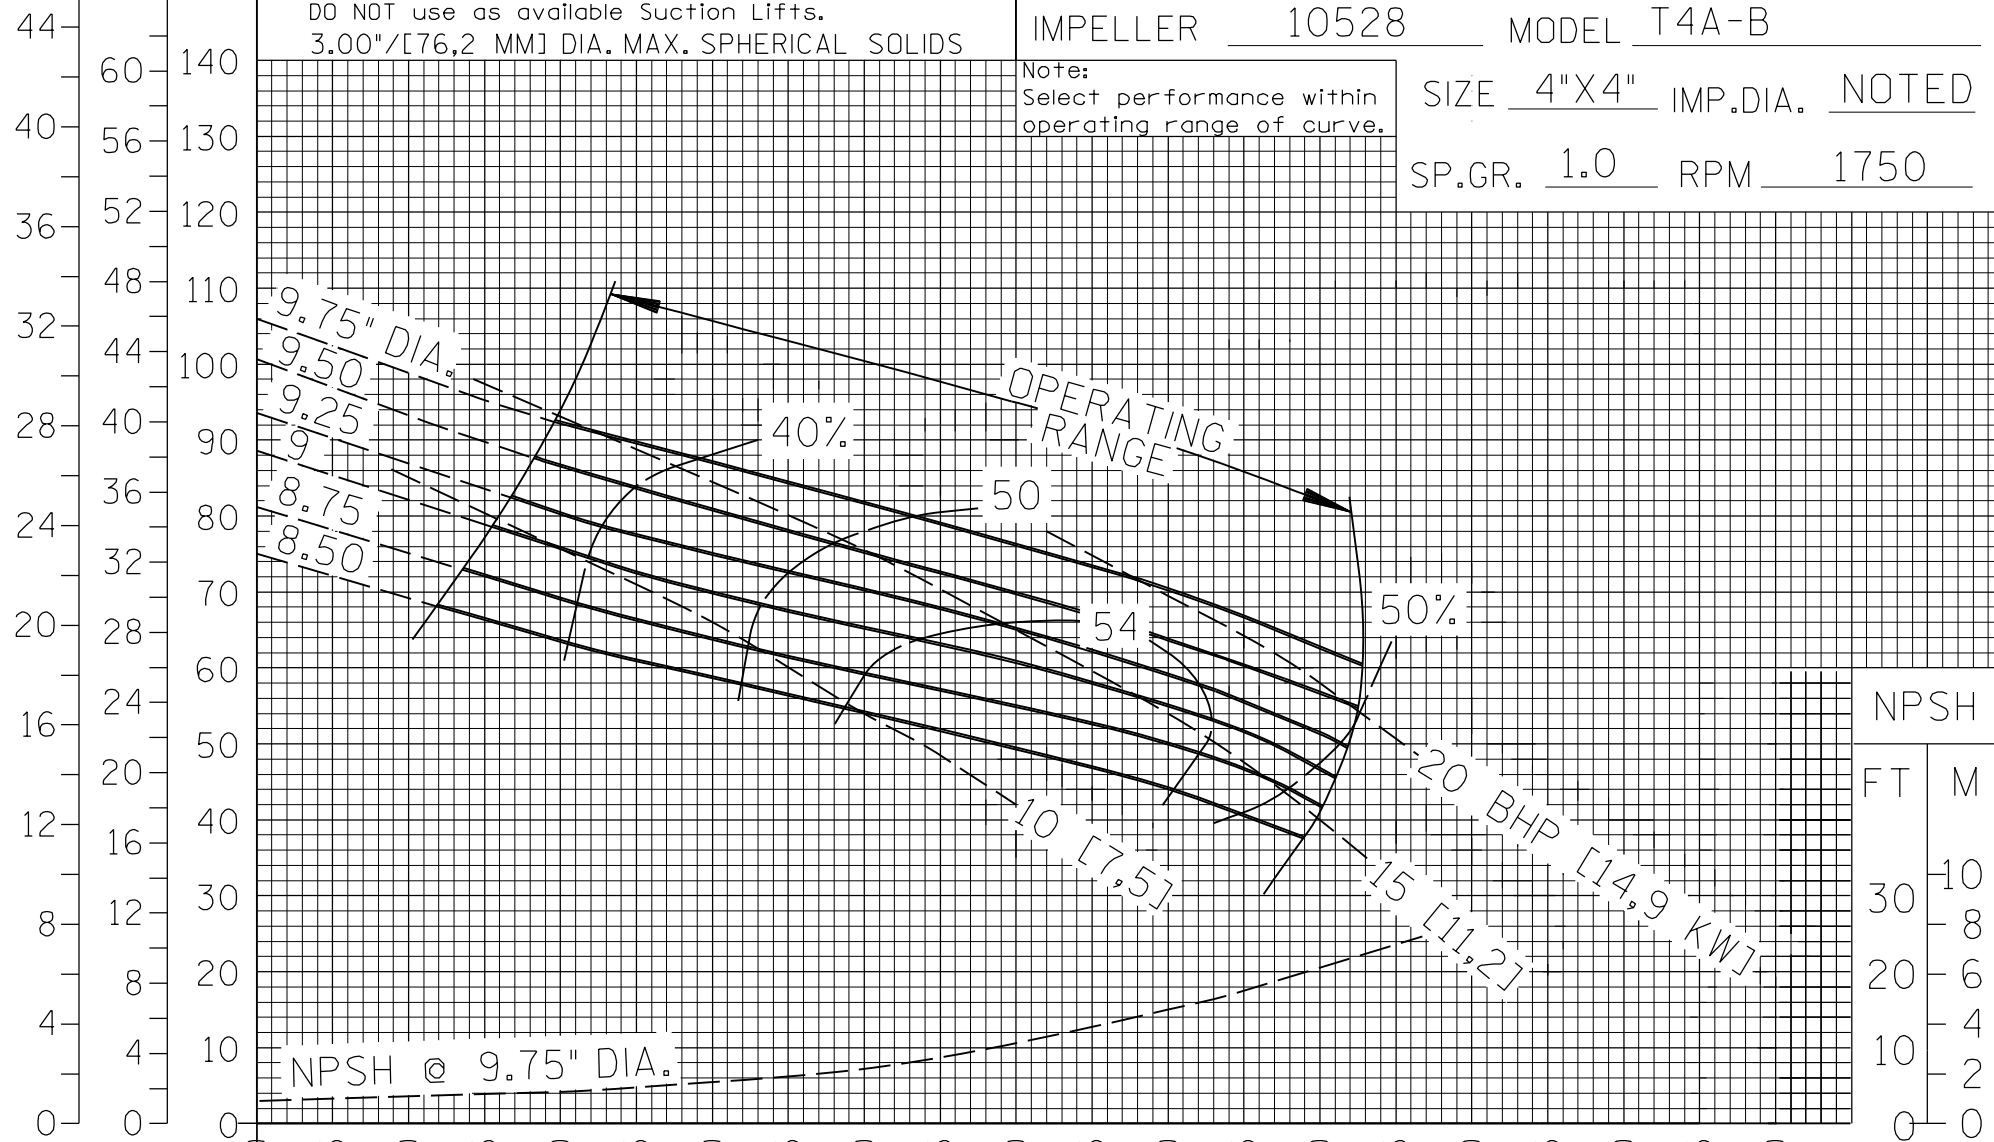

NPSH
 FT M
 30 10
 20 6
 10 2
 0 0

U.S. GALLONS PER MINUTE X 10 0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

LITRES PER SECOND 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

CUBIC METRES PER HOUR X 10 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23



T-1-07-R

FILE NO. t4ab.s01