

TOTAL HEAD

REPRIMING LIFTS

DIA.	11"	11.25"	11.50"
FEET	21	22	24
METERS	6,4	6,7	7,3


Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 10957E CURVE T6CSC-B-1
 10957C
 38615-087
 IMPELLER 10958 MODEL T6CSC-B
 SIZE 6"X6" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1750

Note:
 Select performance within operating range of curve.

Consult factory on operating conditions above 1500 rpm when TDSL exceeds 19 ft.

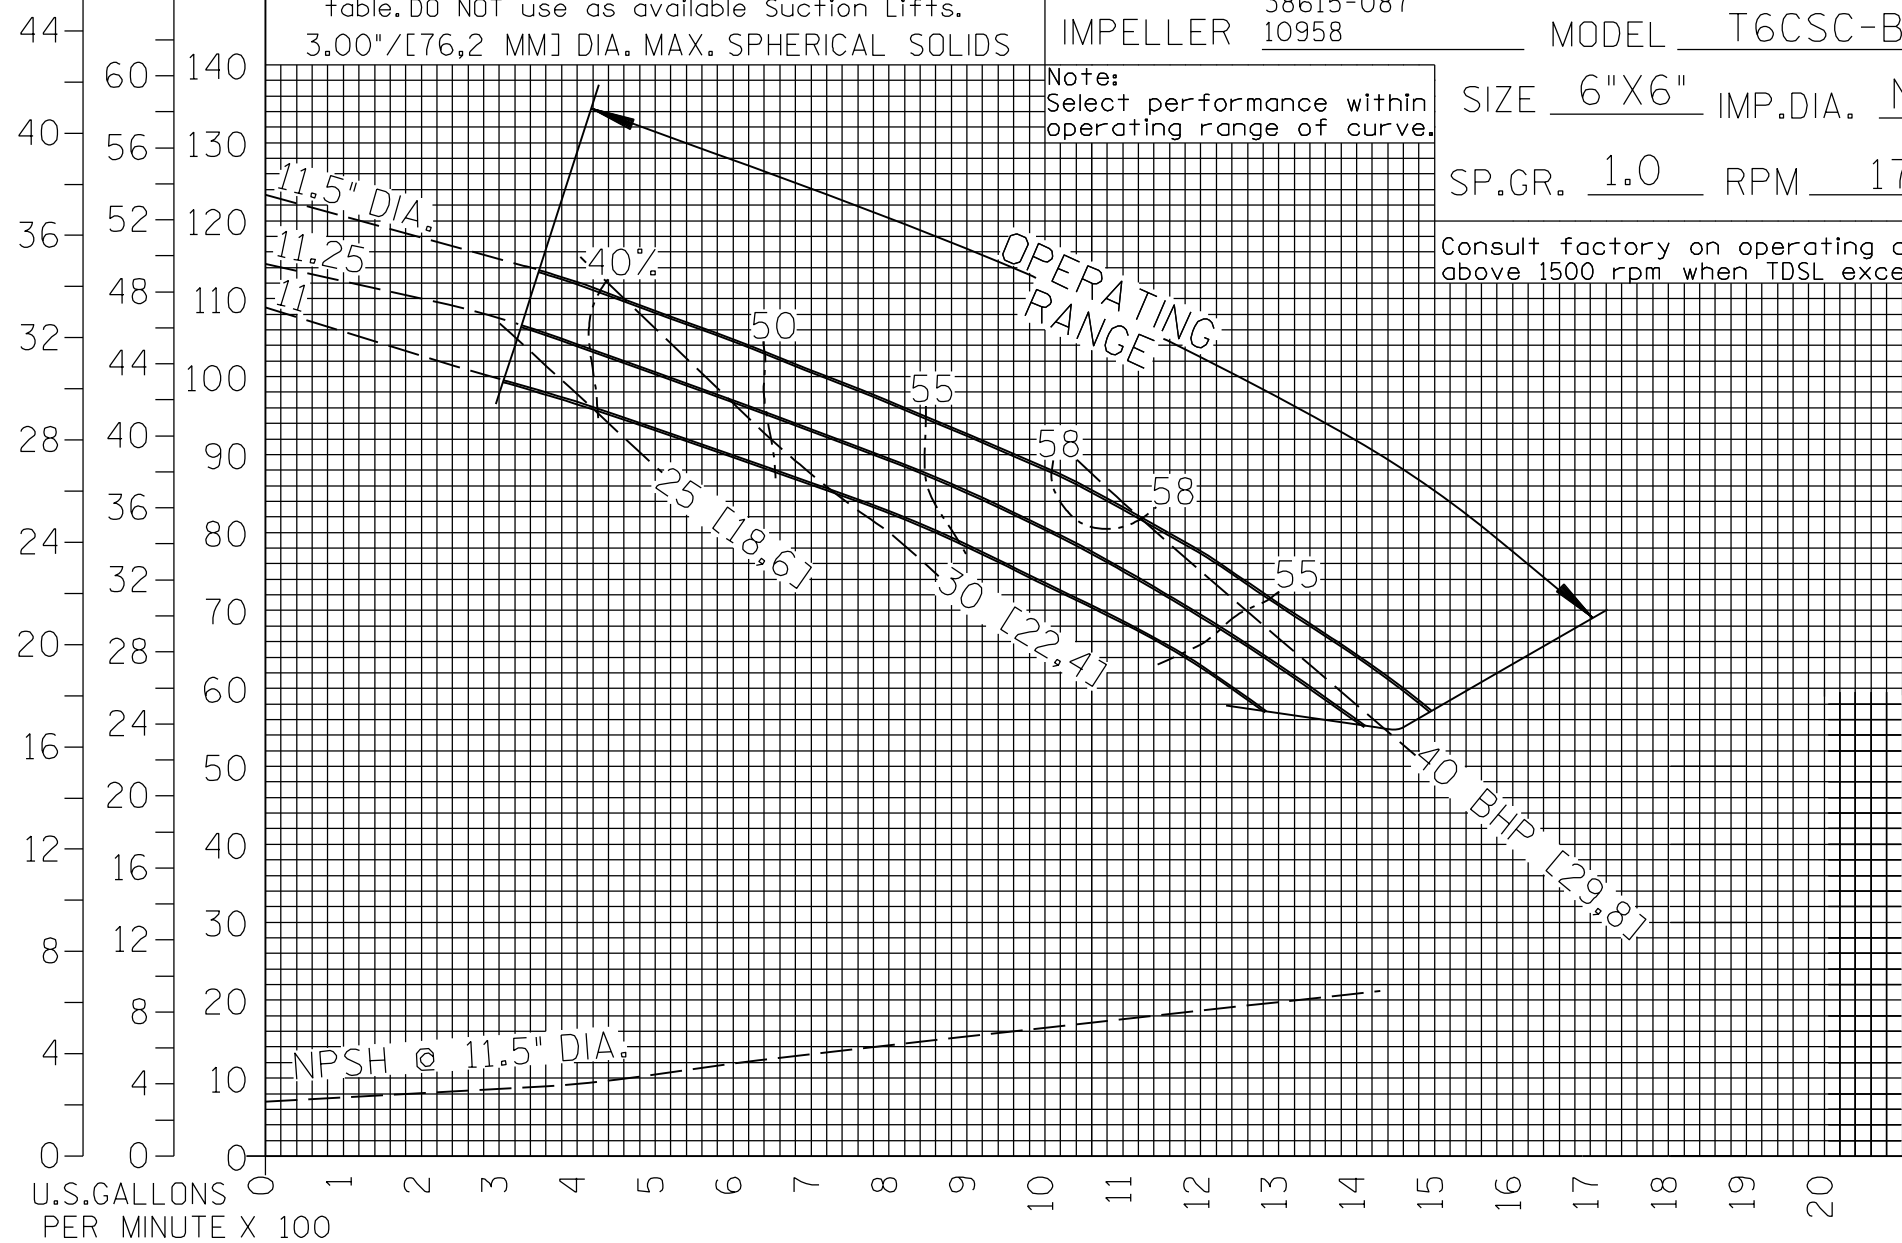

NPSH	
FT	M
30	10
20	8
10	6
0	4
0	2
0	0

U.S. GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10



T-11-14

FILE NO. r6cscb.s01