

TOTAL HEAD

50HZ.

REPRIMING LIFTS

DIA.	11"	11.25"	11.50"	11.75"-12"	12.38"
FEET	16	17	18	20	23
METERS	4,9	5,2	5,5	6,1	7


Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts. 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 10957E
 IMPELLER 10957C
 CURVE T6CSC-B-3
 MODEL T6CSC-B
 SIZE 6"X6" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1450

Note:
 Select performance within operating range of curve.

Consult factory on operating conditions above 1350 rpm when TDSL exceeds 20 ft.

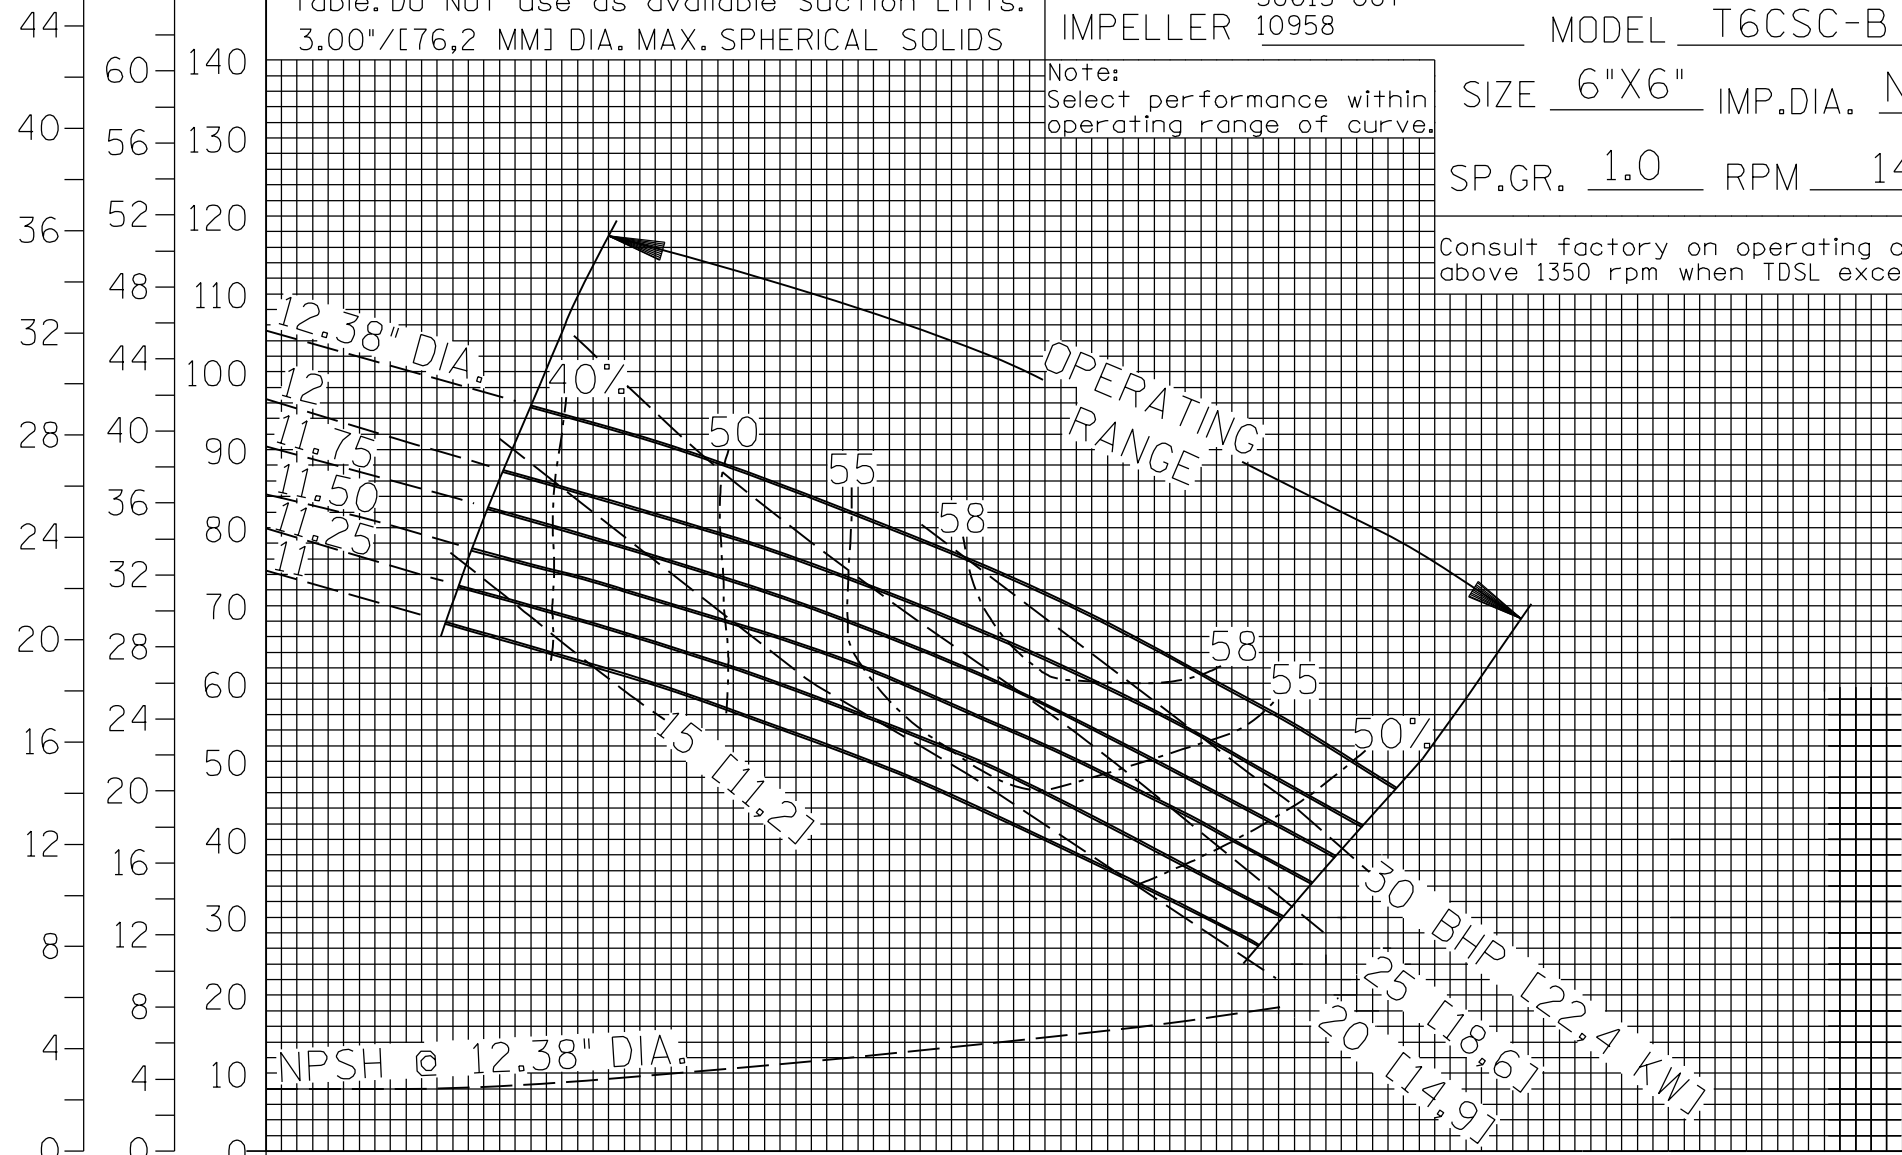

NPSH	
FT	M
30	10
20	6
10	3
0	0

U.S. GALLONS PER MINUTE X 100 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

LITRES PER SECOND X 10 0 1 2 3 4 5 6 7 8 9 10 11 12 13

CUBIC METRES PER HOUR X 10 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46



FILE NO. T6CSCB.S03