


KW REQ.  
30  
25  
20  
15  
10  
5  
0

BHP REQ.  
40  
35  
30  
25  
20  
15  
10  
5  
0


GEAR TRIM D  
TESTED AT 15 IN. HG.  
ALL CONSTRUCTION

30  
25  
20  
15  
10  
5  
0

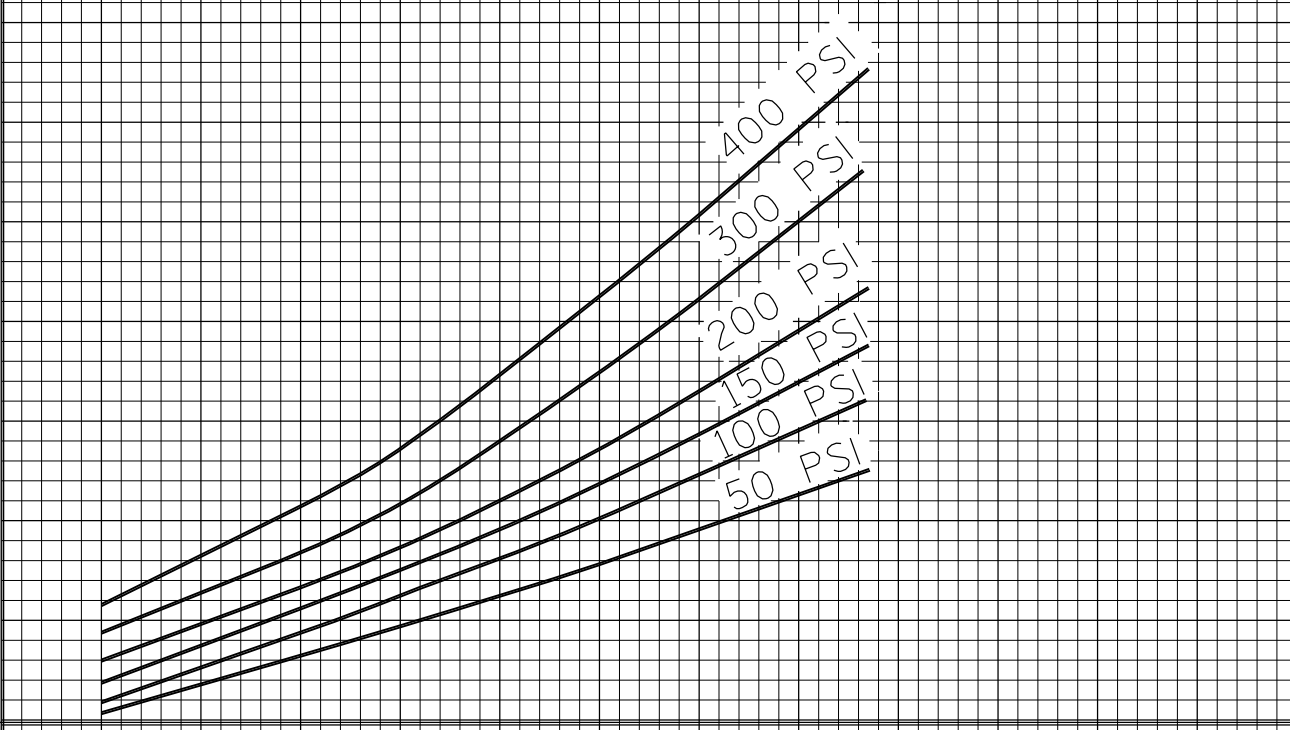

CAPACITY

L/M GPM  
60 160  
50 140  
40 120  
30 100  
20 80  
10 60  
0 40  
0 20  
0 0

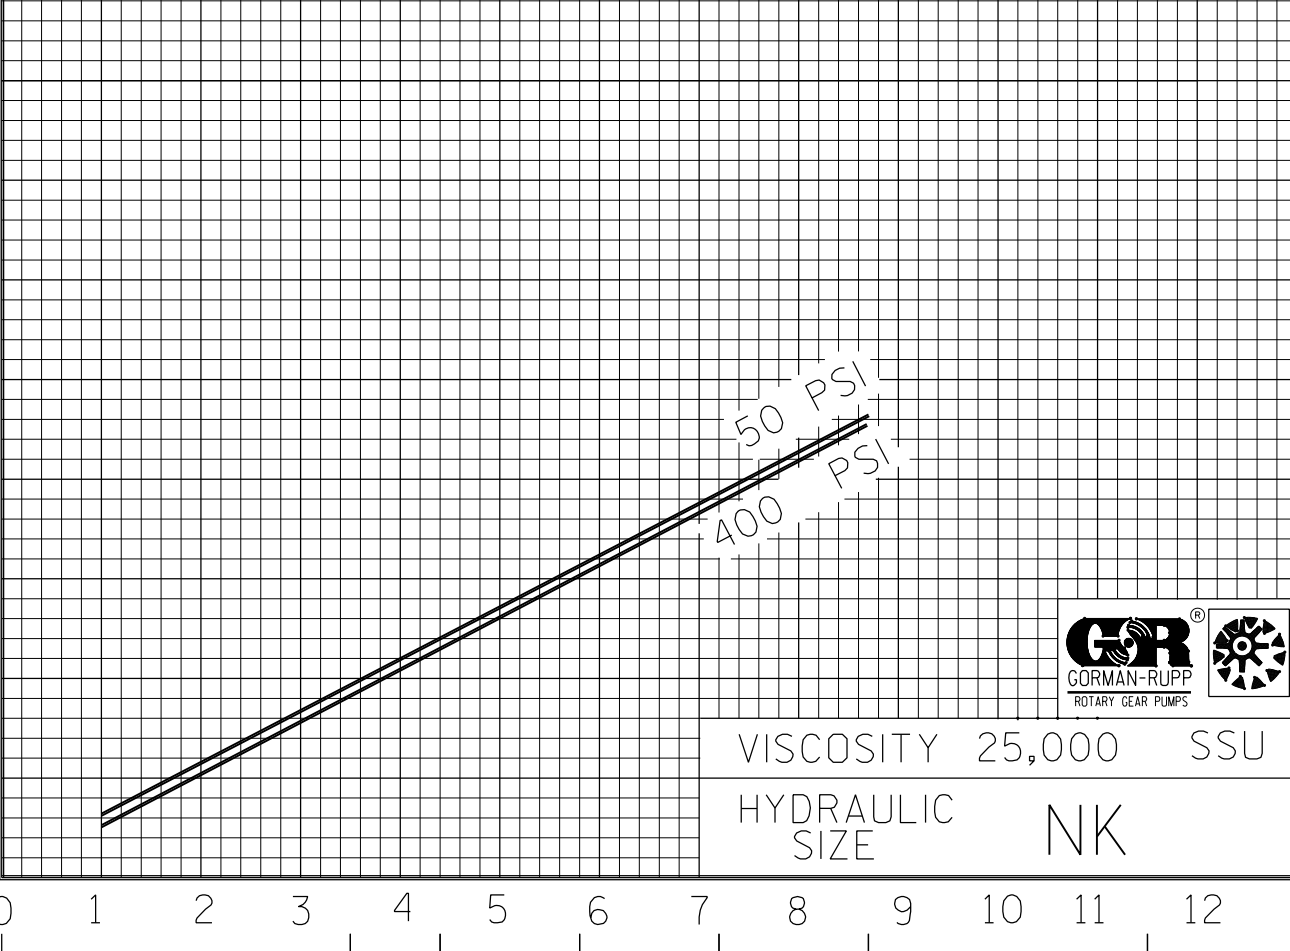

VISCOSITY 25,000 SSU

HYDRAULIC SIZE NK

DRIVE SPEED 350 440 580 720 870 1150

T-6-00-R PUMP SPEED-RPM NK-4

FILE NO. nk.s04