



KW REQ. 30  
BHP REQ. 40

GEAR TRIM D  
TESTED AT 15 IN. HG.  
ALL CONSTRUCTION

25  
30  
35  
40  
5  
10  
15  
20  
25  
30  
35  
40

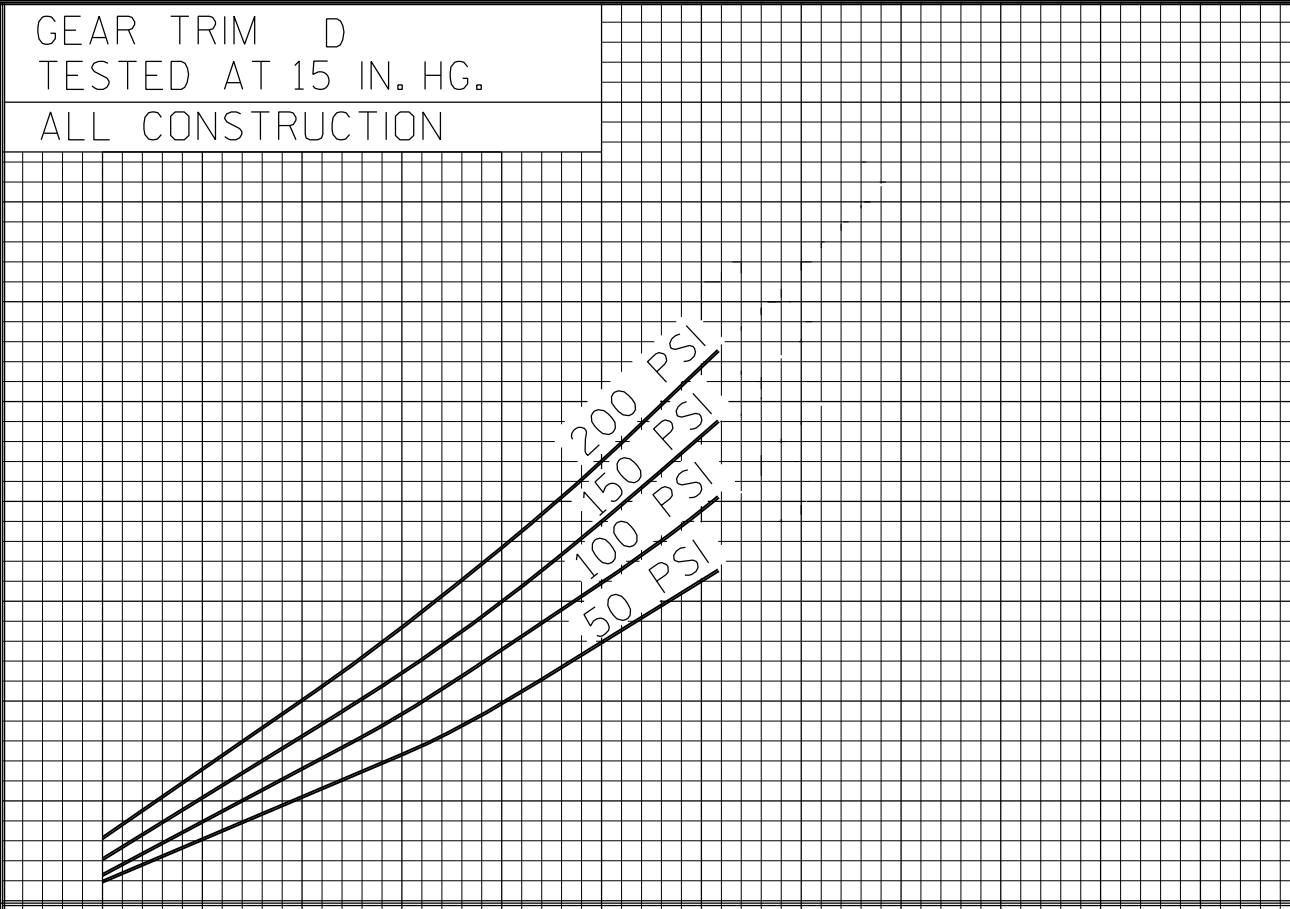

CAPACITY  
L/M GPM  
60 160  
50 140  
40 120  
30 100  
20 80  
10 60  
10 40  
X 10 20  
X 100 0

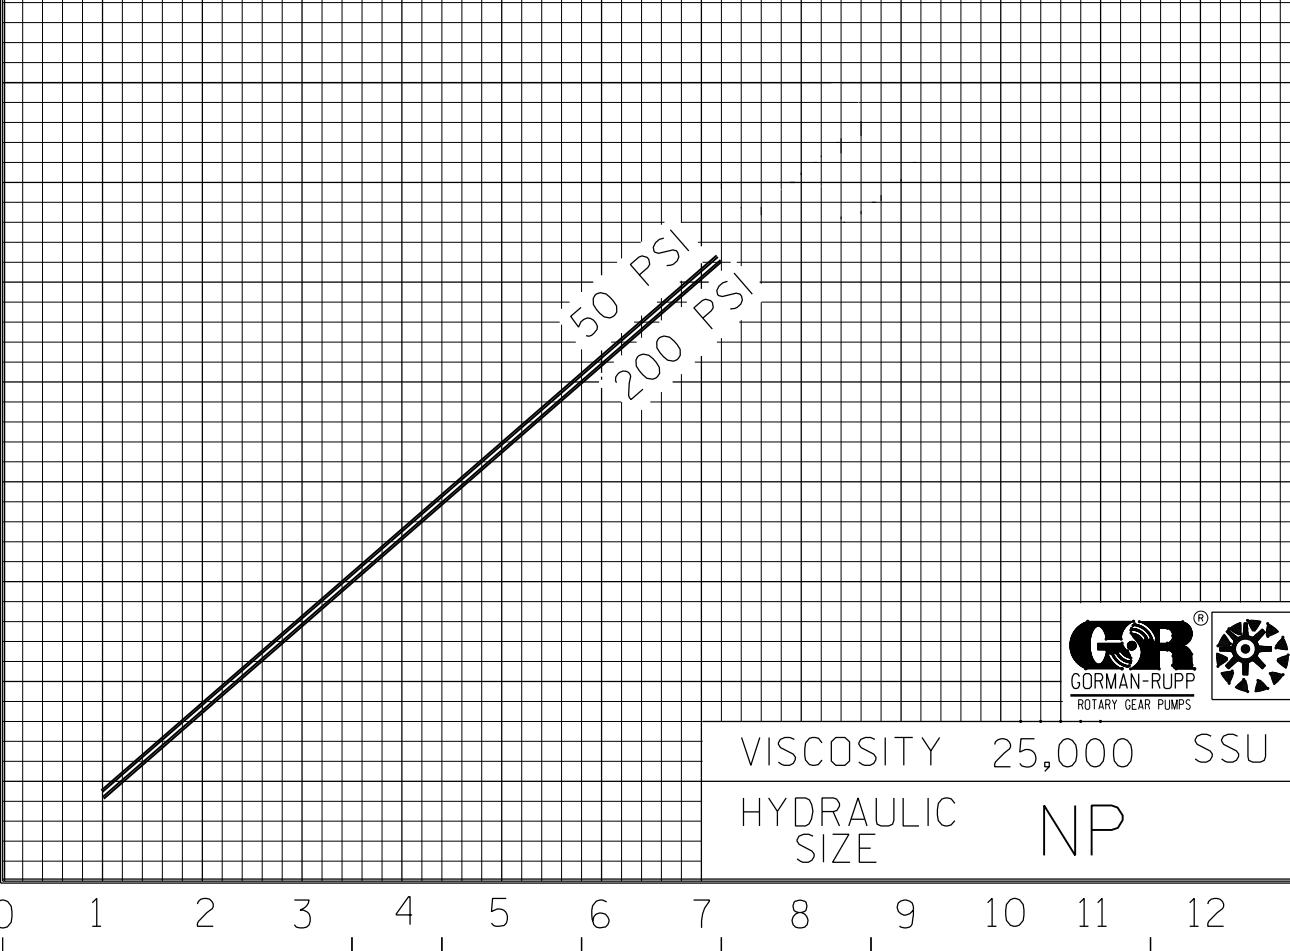

VISCOSITY 25,000 SSU

HYDRAULIC SIZE NP

DRIVE SPEED 350 440 580 720 870 1150

T-6-00-R PUMP SPEED-RPM NP-4

FILE NO. np.s04