

TOTAL HEAD

JOHN DEERE 4024T DIESEL ENGINE
 GOVERNOR SETTING 1950 RPM @ SHUT OFF
 DO NOT RUN BELOW 1400 RPM
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38218-015 CURVE PA4A-4024T-1

IMPELLER 10528 MODEL PA4A-4024T

SIZE 4"X4" IMP.DIA. 9.75"

SP.GR. 1.0 RPM NOTED

Performance shown does not include discharge check vavle losses.

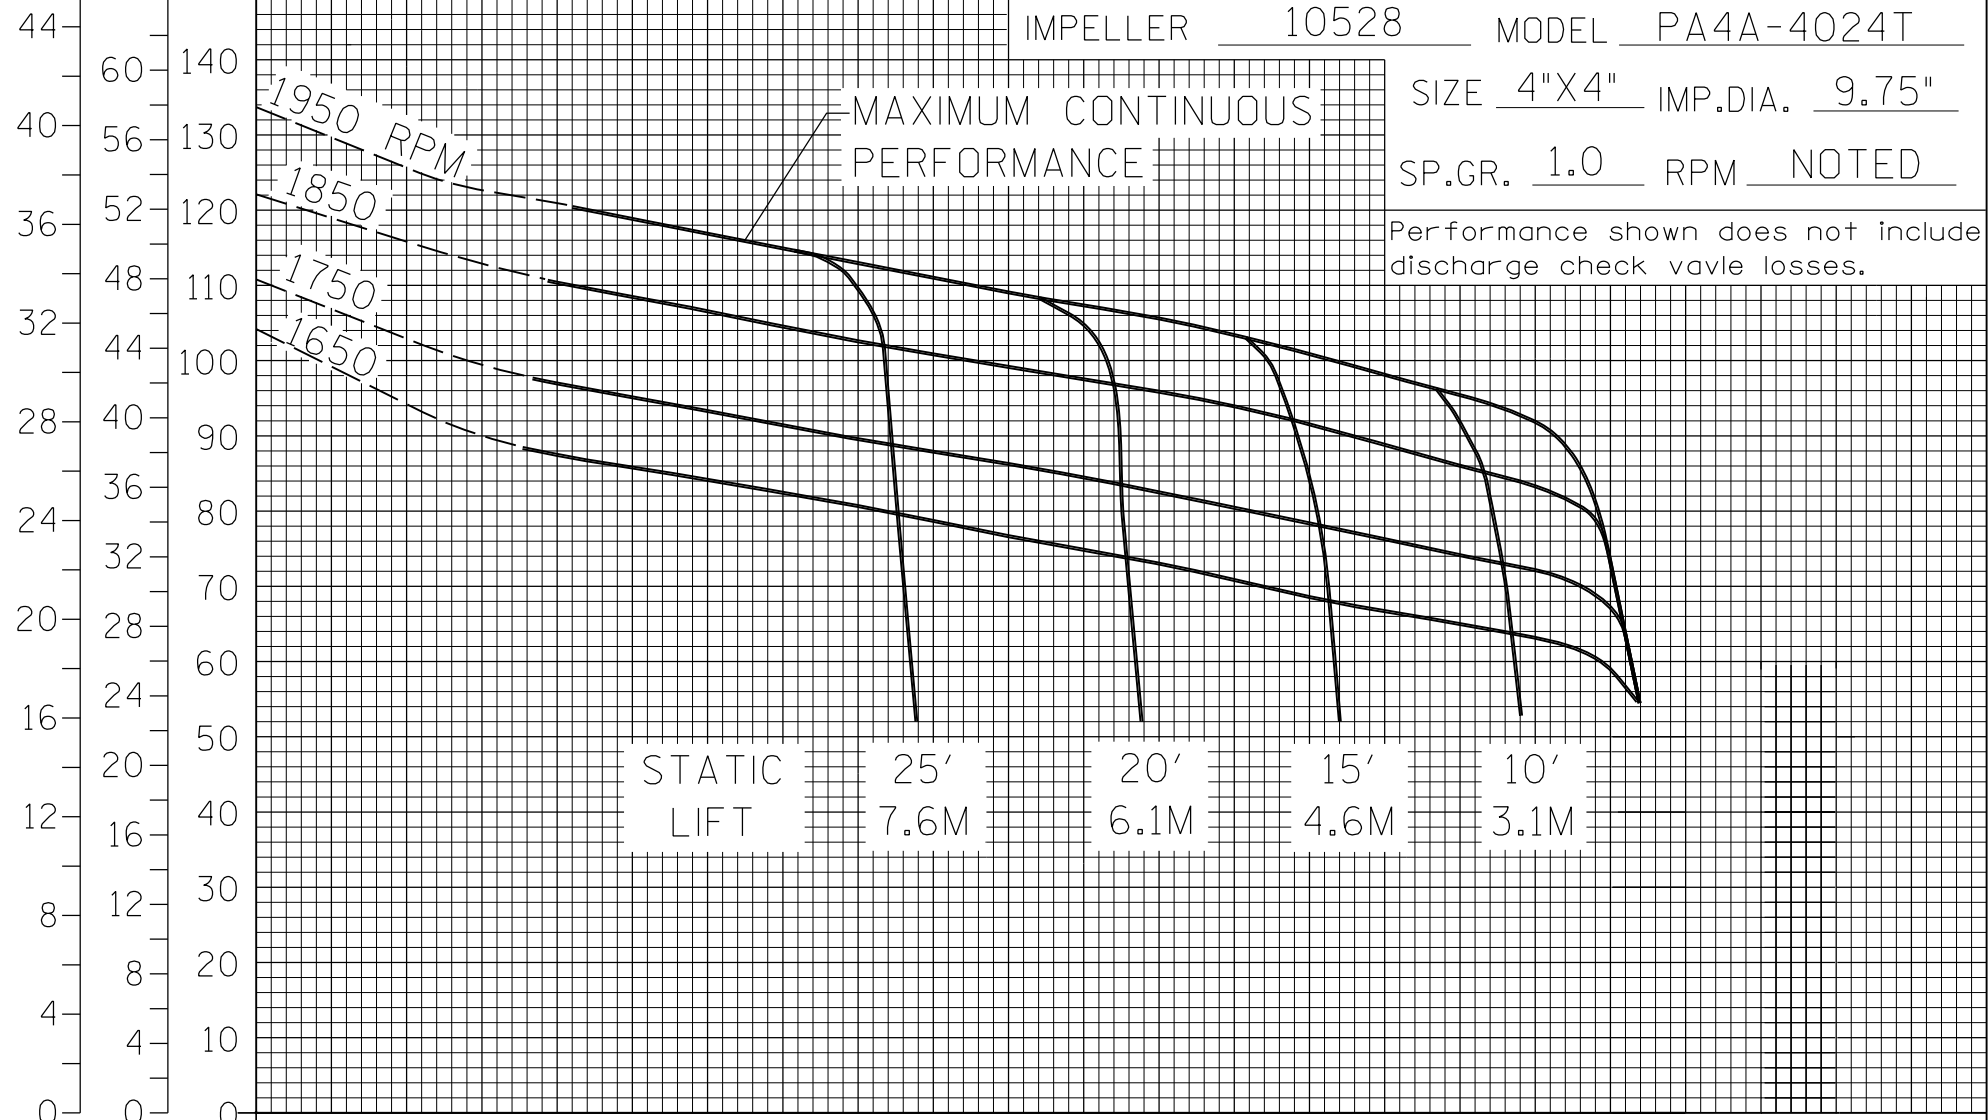

FILE NO. pd4a4024t.s01

U.S. GALLONS PER MINUTE X 10: 0, 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100

LITRES PER SECOND: 0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64

CUBIC METRES PER HOUR X 10: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23



C-12-09