

TOTAL HEAD

CATERPILLAR C18 DIESEL ENGINE  
 GOVERNOR SETTING 1800 RPM @ SHUT OFF  
 DO NOT RUN BELOW 1400 RPM  
 2.00"/[50,8 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38219-004 CURVE PAH10AC-C18-1  
 IMPELLER 38621-783 MODEL PAH10AC-C18

SIZE 12"X10" IMP.DIA. 22.50"

SP.GR. 1.0 RPM NOTED

Performance shown does not include discharge check valve losses.  
 Max Operating Pressure 250 PSI  
 Specify Plumbing Accordingly.

M  
 PSI  
 FT  
 220  
 200  
 180  
 160  
 140  
 120  
 100  
 80  
 60  
 40  
 20  
 0

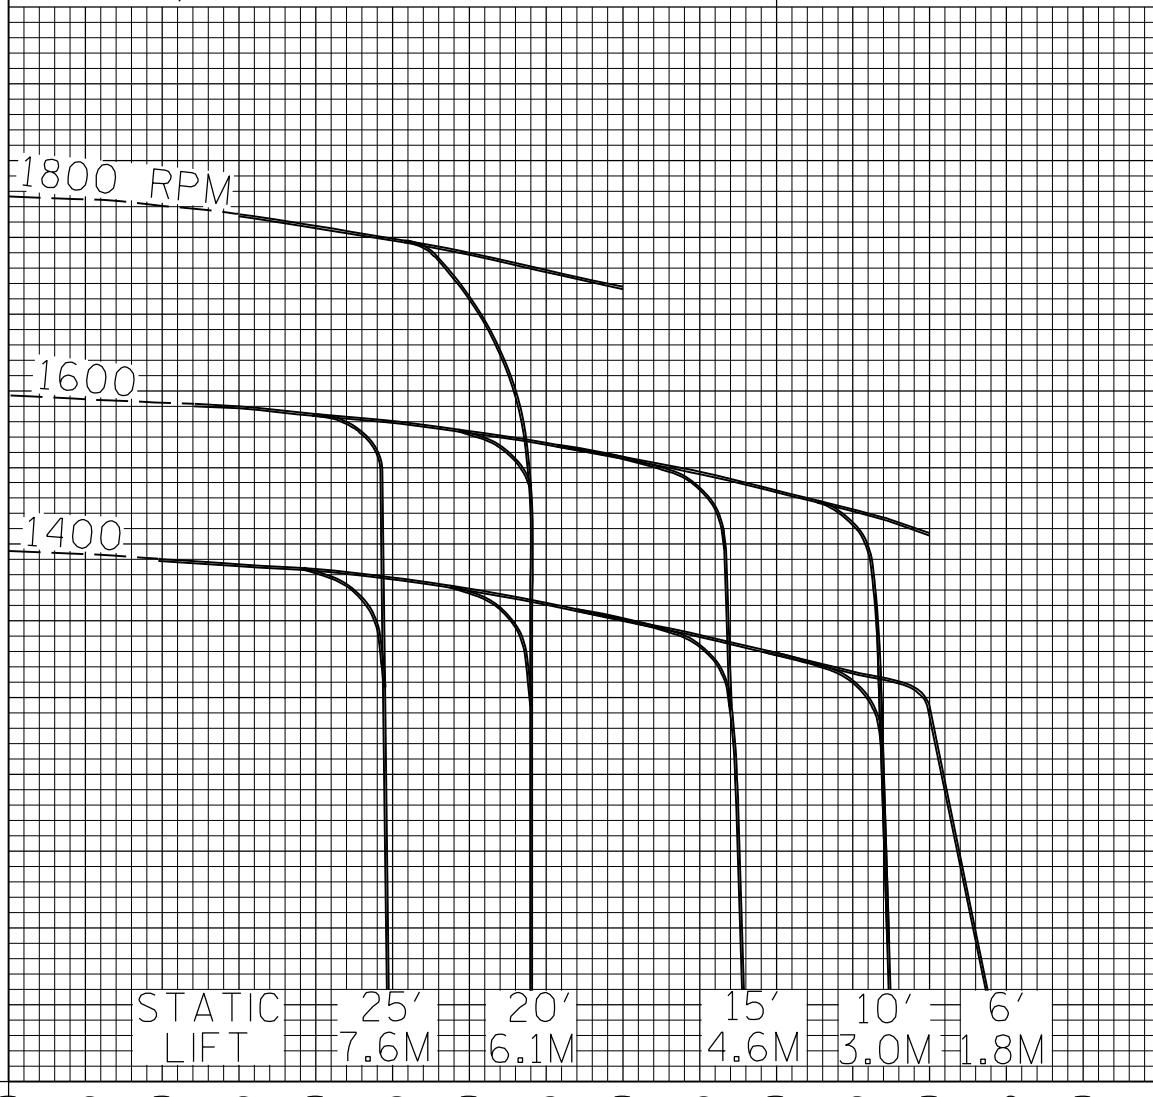

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 100

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100



T-6-14-R

FILE NO. PAH10ACC18.s01