

TOTAL HEAD

V-BELT GUIDELINES - 13.50-14.25" DIA		
IMPELLER - DIA	13.50	14.25
MIN PUMP SHEAVE (IN)	6.00	9.00
MIN PUMP SHEAVE (MM)	152.4	229

PERFORMANCE CURVE

VOLUTE 38218-304 CURVE PAH4EC-B-2

IMPELLER 38621-786 MODEL PAH4EC-B


SIZE 6"X4" IMP.DIA. NOTED

SP.GR. 1.0 RPM 2400

NOTE: ADD 2.5 HP FOR BELT
DRIVEN AIR COMPRESSOR
250 MAX. OPERATING PRESSURE
SPECIFY PLUMBING ACCORDINGLY

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

Performance shown does not include discharge check valve losses.

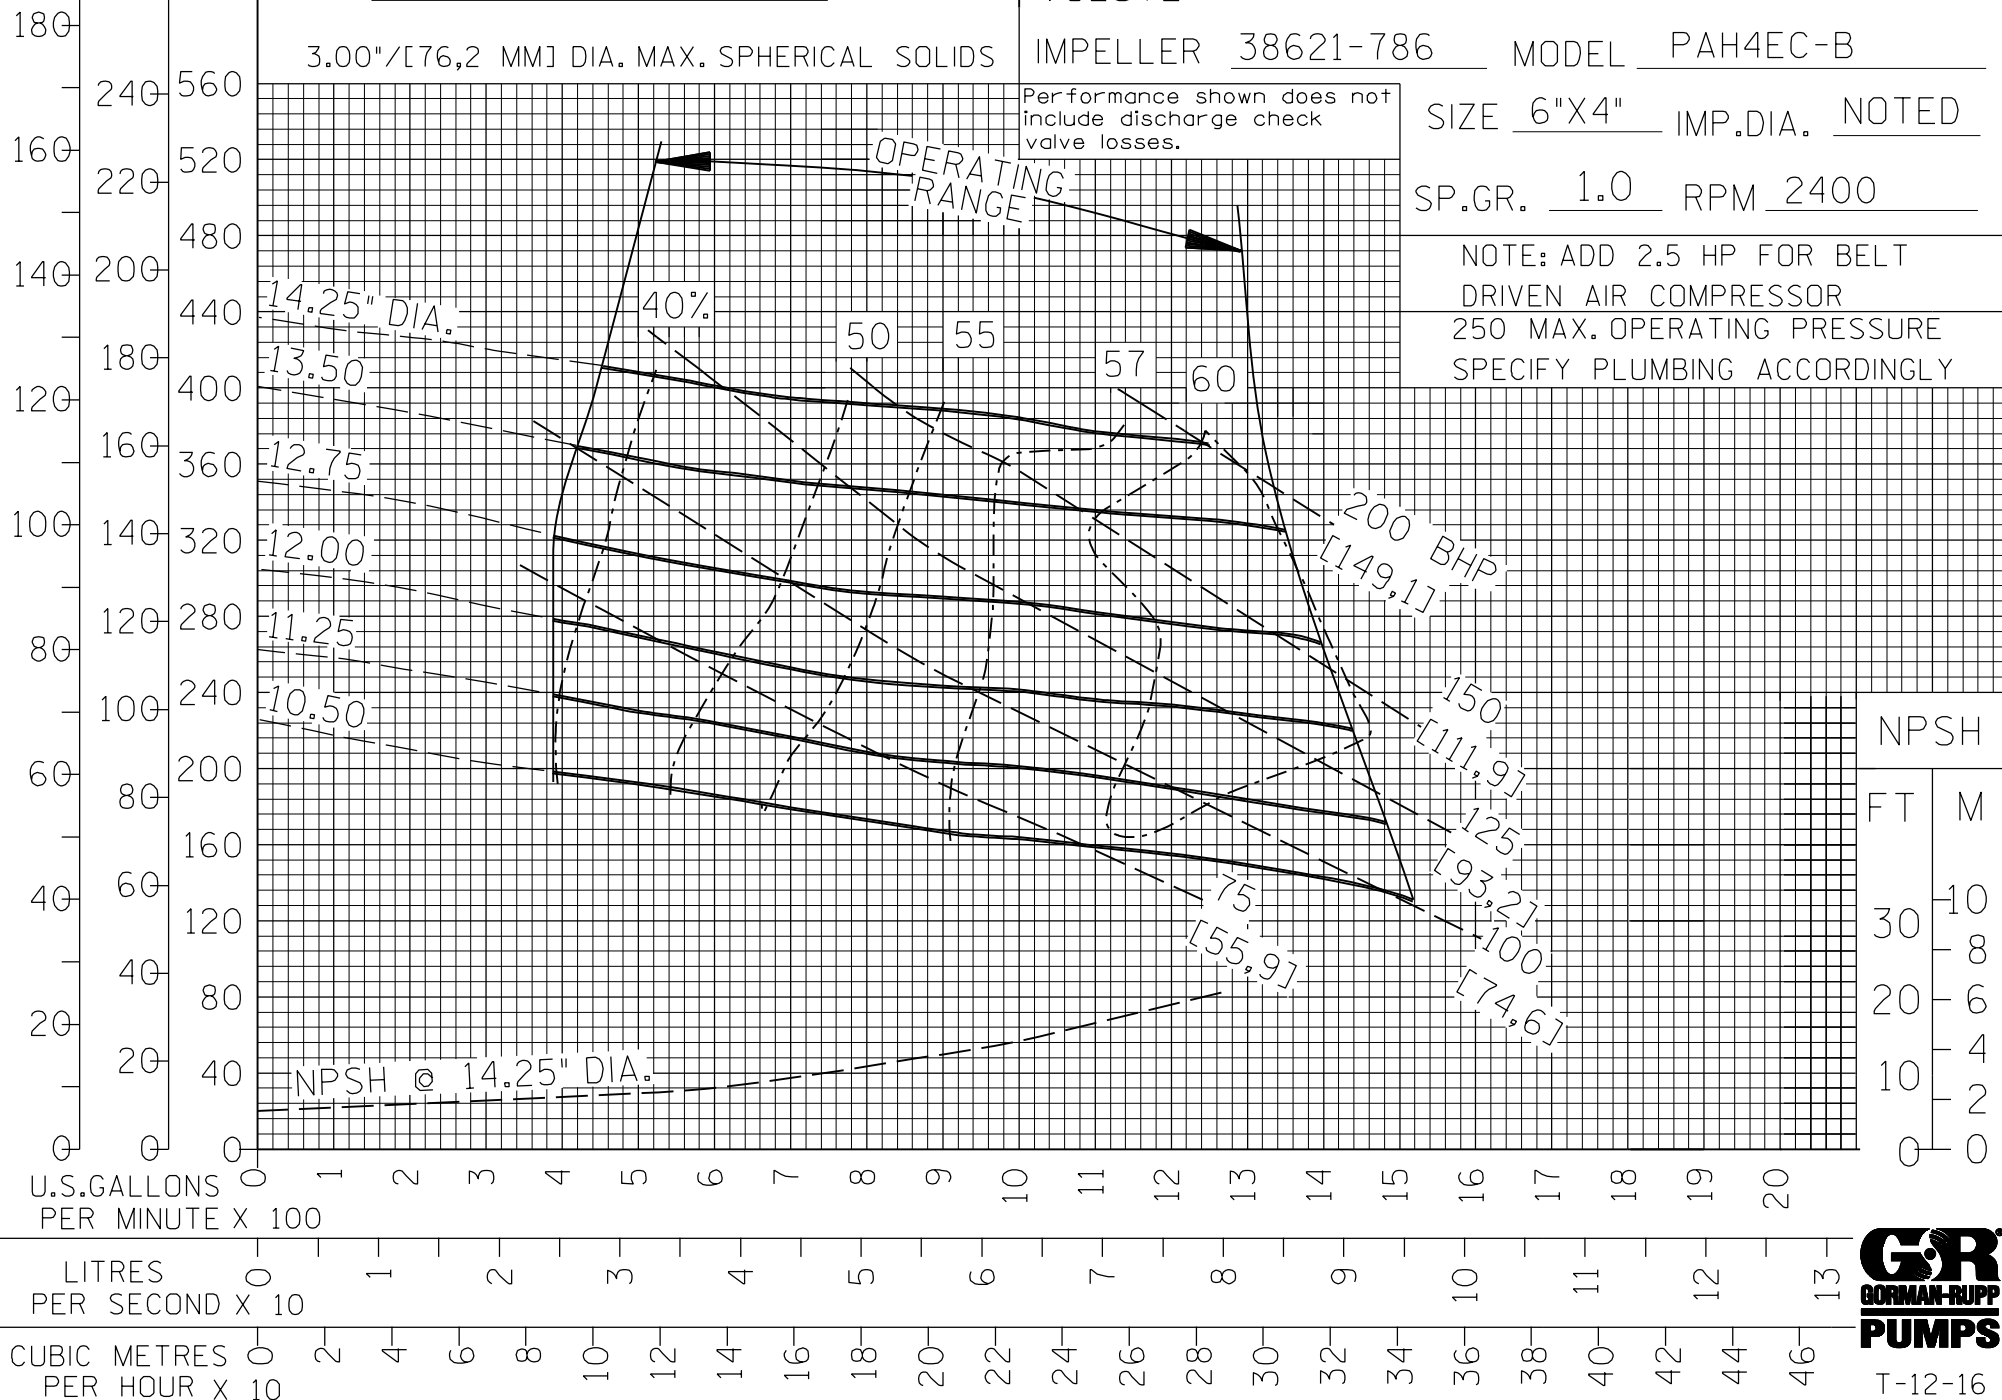

NPSH	
FT	M
0	0
10	3
20	6
30	9
40	12
50	15
60	18
70	21
80	24
90	27
100	30
110	33
120	36
130	39
140	42
150	45
160	48
170	51
180	54
190	57
200	60



FILE NO. pah4ec.s02