



KW REQ. BHP REQ.

GEAR TRIM D
TESTED AT 15 IN. HG.
ALL CONSTRUCTION

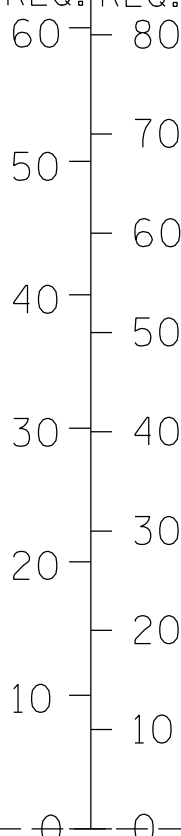

L/M GPM

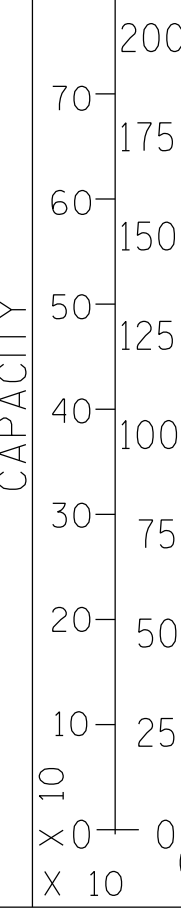

50 PSI
400 PSI



VISCOSITY 25,000 SSU

HYDRAULIC SIZE RR

DRIVE SPEED 280 350 450 560

FILE NO. rr.s04

T-6-00-R

PUMP SPEED-RPM

RR-4