

PERFORMANCE CURVE

HYDRAULIC
EFFICIENCY SHOWN

208 VOLT 3 PH. CURVE


3.00" DIA. SPHERICAL SOLIDS

CURVE SFS4A-2 MODEL SFS4A-X

SIZE 4" IMP. DIA. NOTED

SP.GR. 1.0 RPM 1750

AMPS

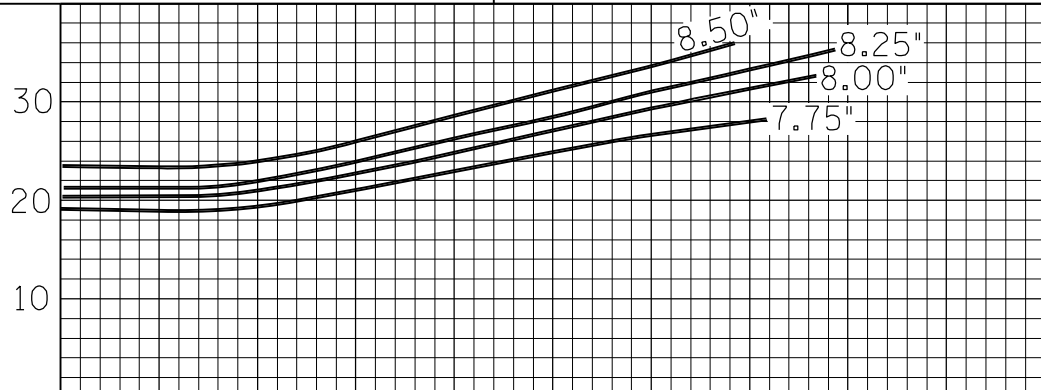

TOTAL HEAD
M PSI FT

100
90
80
70
60
50
40
30
20
16
12
8
4
0

28
24
20
16
12
8
4
0

100
90
80
70
60
50
40
30
20
16
12
8
4
0


IMPELLER TRIMS AVAILABLE
IN .25" INCREMENTS

208 VOLT 3 PH. CURVE

U.S. GALLONS
PER MINUTE X 100

LITRES
PER SECOND

CUBIC METRES
PER HOUR X 10

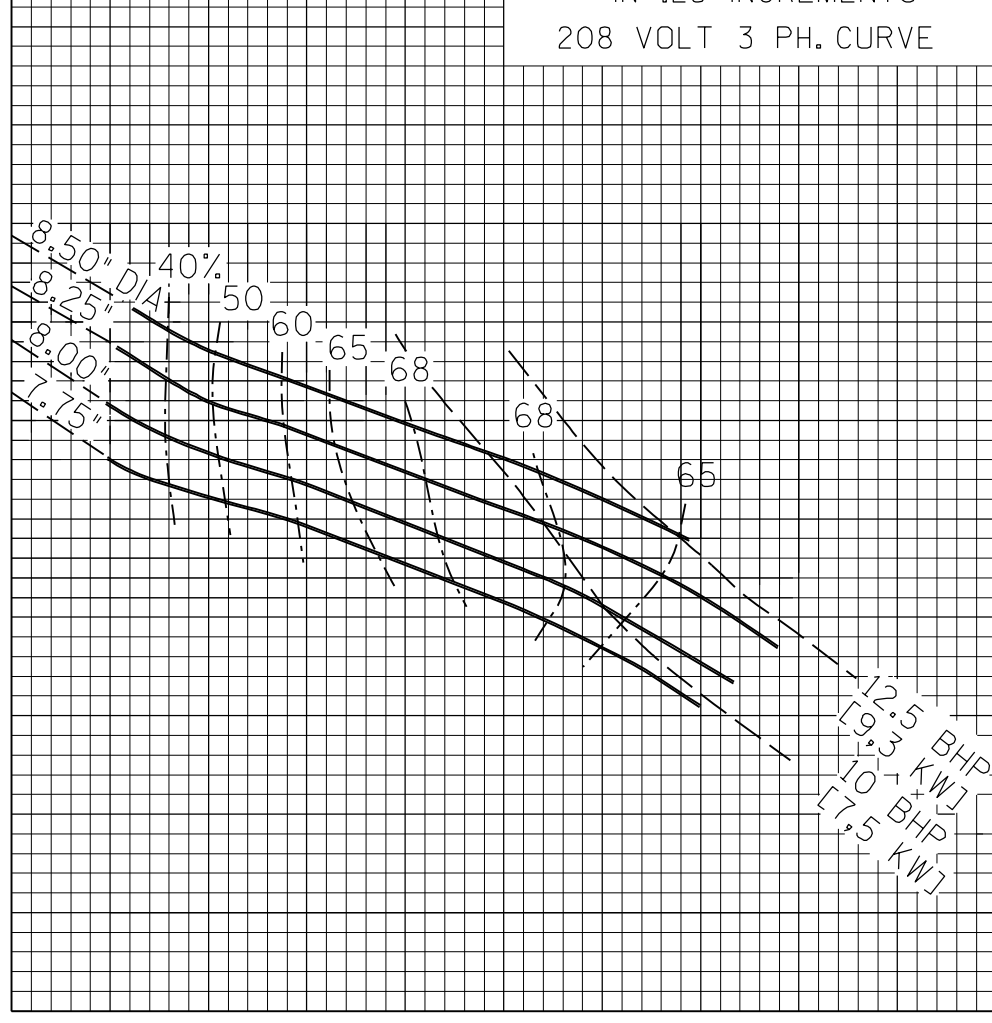

[12.5 BHP
[9.35 KW]
[10.1 BHP
[7.5 KW]



C-8-16-R