



KW REQ.
BHP REQ.

GEAR TRIM STANDARD
TESTED AT 15 IN. HG.
GRAY IRON CONSTRUCTION

50
40
30
20
10
0

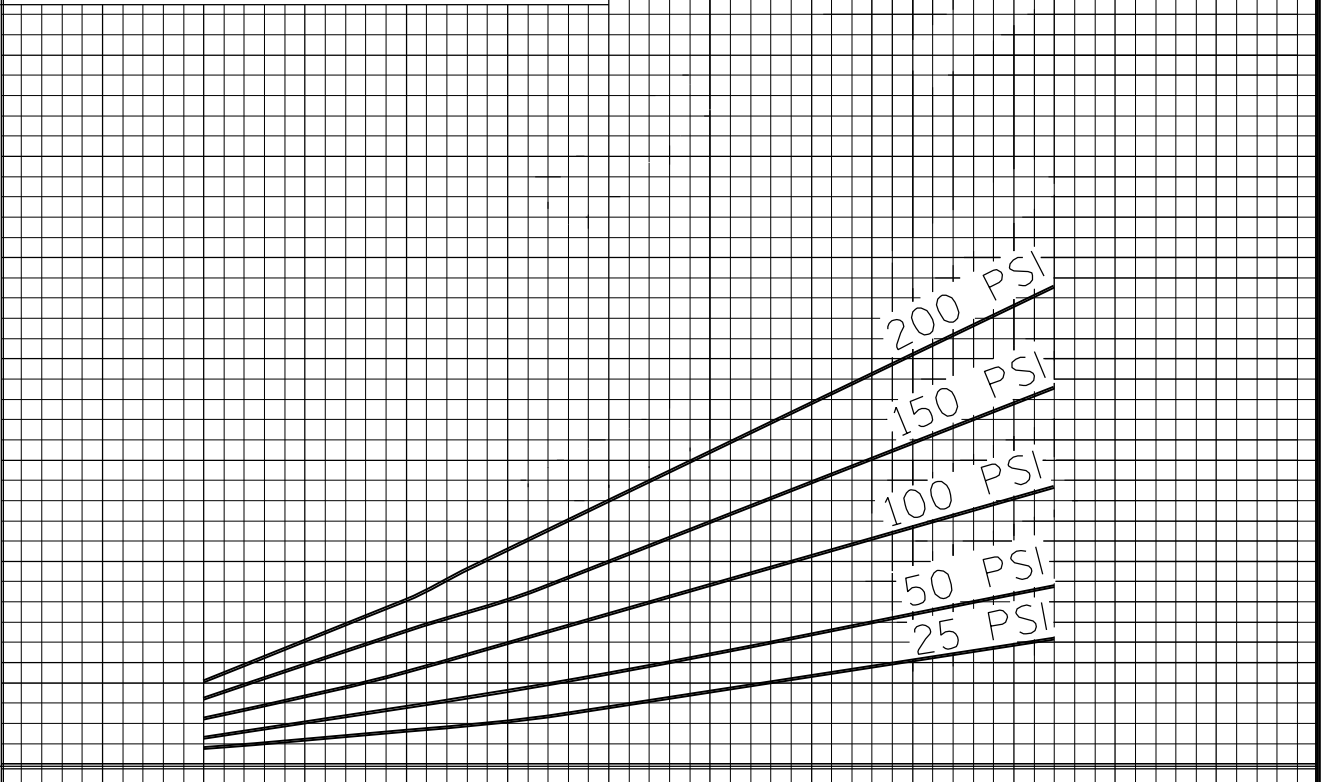

CAPACITY
L/M GPM
140
120
100
80
60
40
20
0

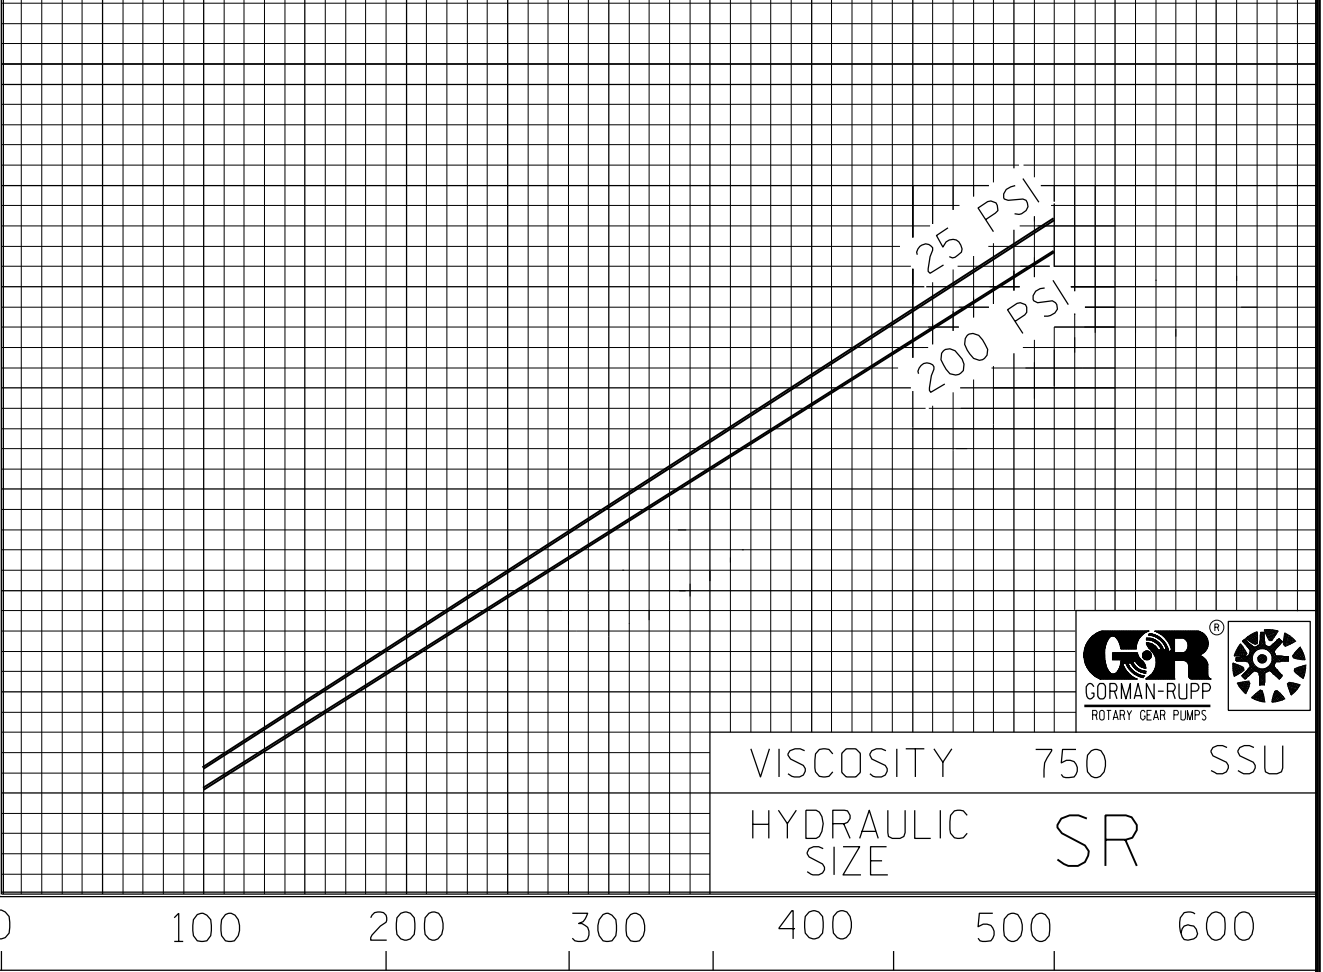

VISCOSITY	750	SSU
HYDRAULIC SIZE	SR	

DRIVE SPEED 190 280 350 440 520

T-10-18-R PUMP SPEED-RPM SR-3

FILE NO. sr.s03