
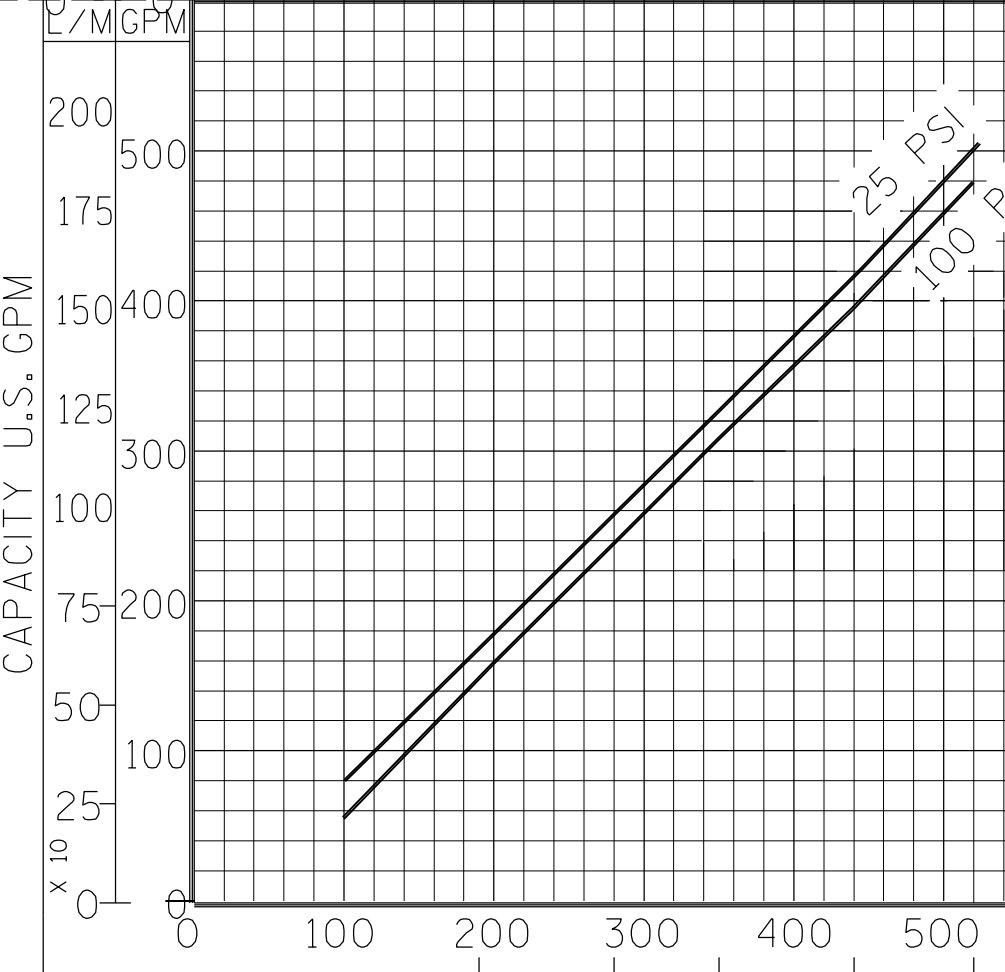


KW REQ. BHP REQ. GEAR TRIM STANDARD TESTED AT 15 IN. HG. GRAY IRON CONSTRUCTION

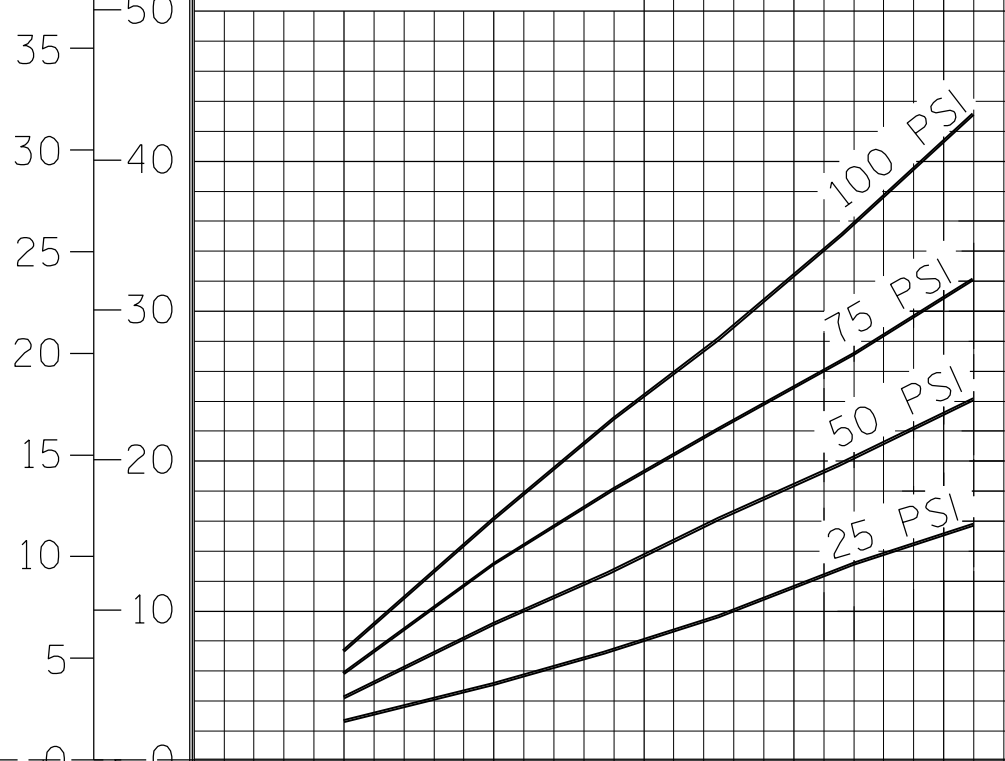

VISCOSITY 32 SSU
 HYDRAULIC SIZE SU

DRIVE SPEED 190 280 350 440 520

FILE NO. su.s01