

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050-1150	1250	1350	1450-1550
FEET	8	10	12	14	17	18	20	21
METERS	2,4	3,1	3,7	4,3	5,2	5,5	6,1	6,4

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38222-701 CURVE T10A-B-5

IMPELLER 38615-014 MODEL T10A-B

SIZE 10"X10" IMP.DIA. 14.25"

SP.GR. 1.0 RPM NOTED

Note:  
Select performance within operating range of curve.

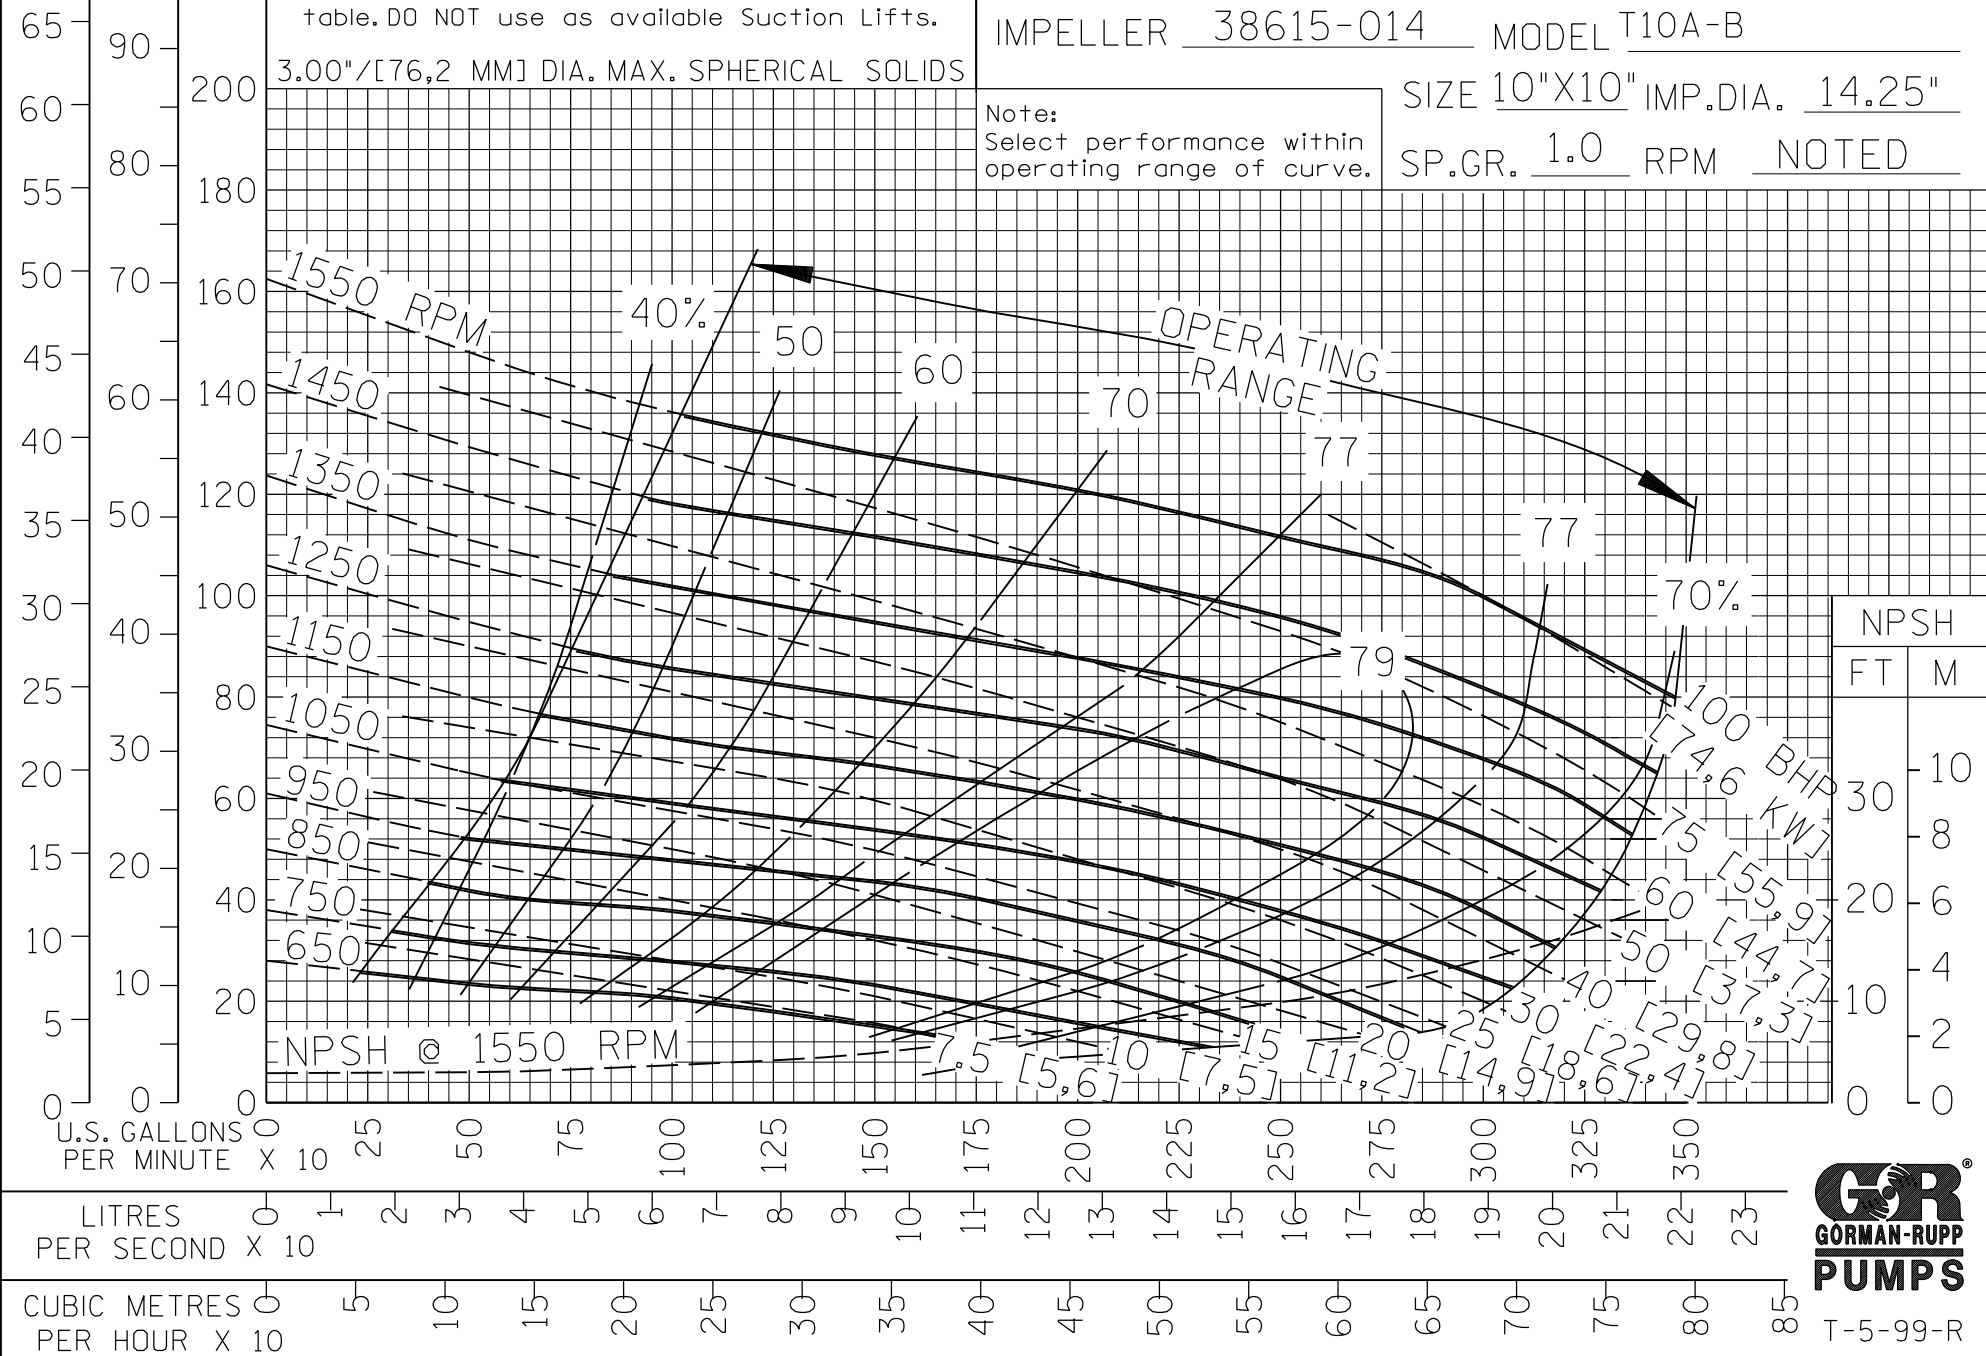

FILE NO. T10ab.s05



T-5-99-R