

TOTAL HEAD

REPRIMING LIFTS

PERFORMANCE CURVE

RPM	650	750	850	950	1050	1150	1250	1350	1450-1550	1650
FEET	6	9	11	12	14	16	17	19	21	20
METERS	1,8	2,7	3,4	3,7	4,3	4,9	5,2	5,8	6,4	6,1

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS


VOLUTE 38222-701 CURVE T10A-B-6

IMPELLER 38615-014 MODEL T10A-B

SIZE 10"X10" IMP.DIA. 13.75"

Note:  
Select performance within operating range of curve.

SP.GR. 1.0 RPM NOTED

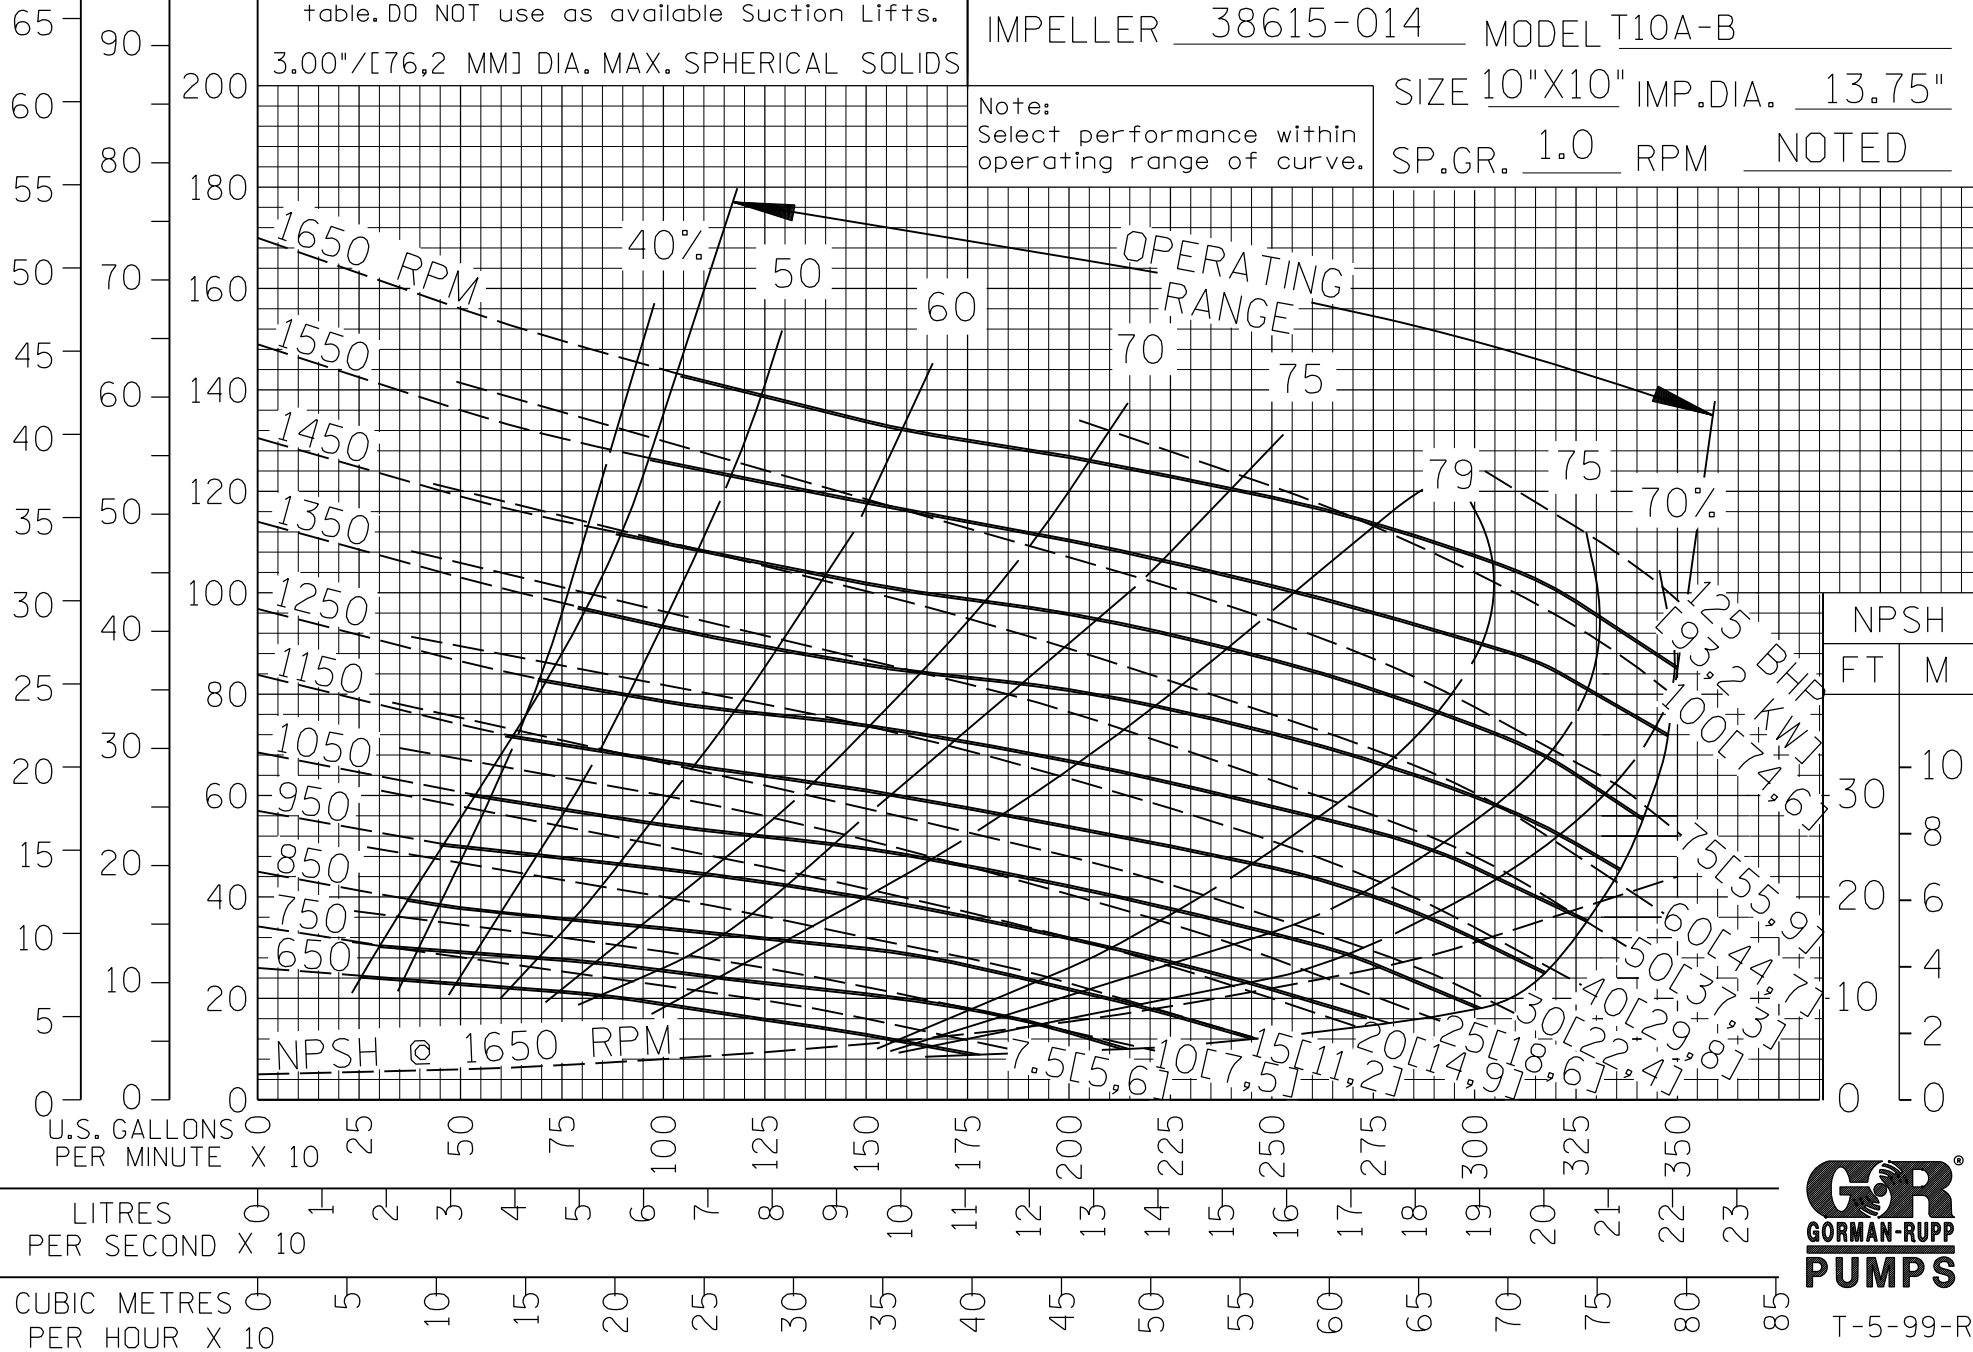

FILE NO. T10ab.s06



T-5-99-R