

TOTAL HEAD

REPRIMING LIFTS

RPM	750-850	950	1050	1150	1250	1350	1450	1550	1650	1750
FEET	2	4	7	9	13	15	16	13	11	10
METERS	.61	1,2	2,1	2,7	4	4,6	4,9	4	3,4	3,1

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38222-701 CURVE T10A-B-9

IMPELLER 38615-014 MODEL T10A-B

SIZE 10"X10" IMP.DIA. 12.25"

Note:
Select performance within operating range of curve.

SP.GR. 1.0 RPM NOTED

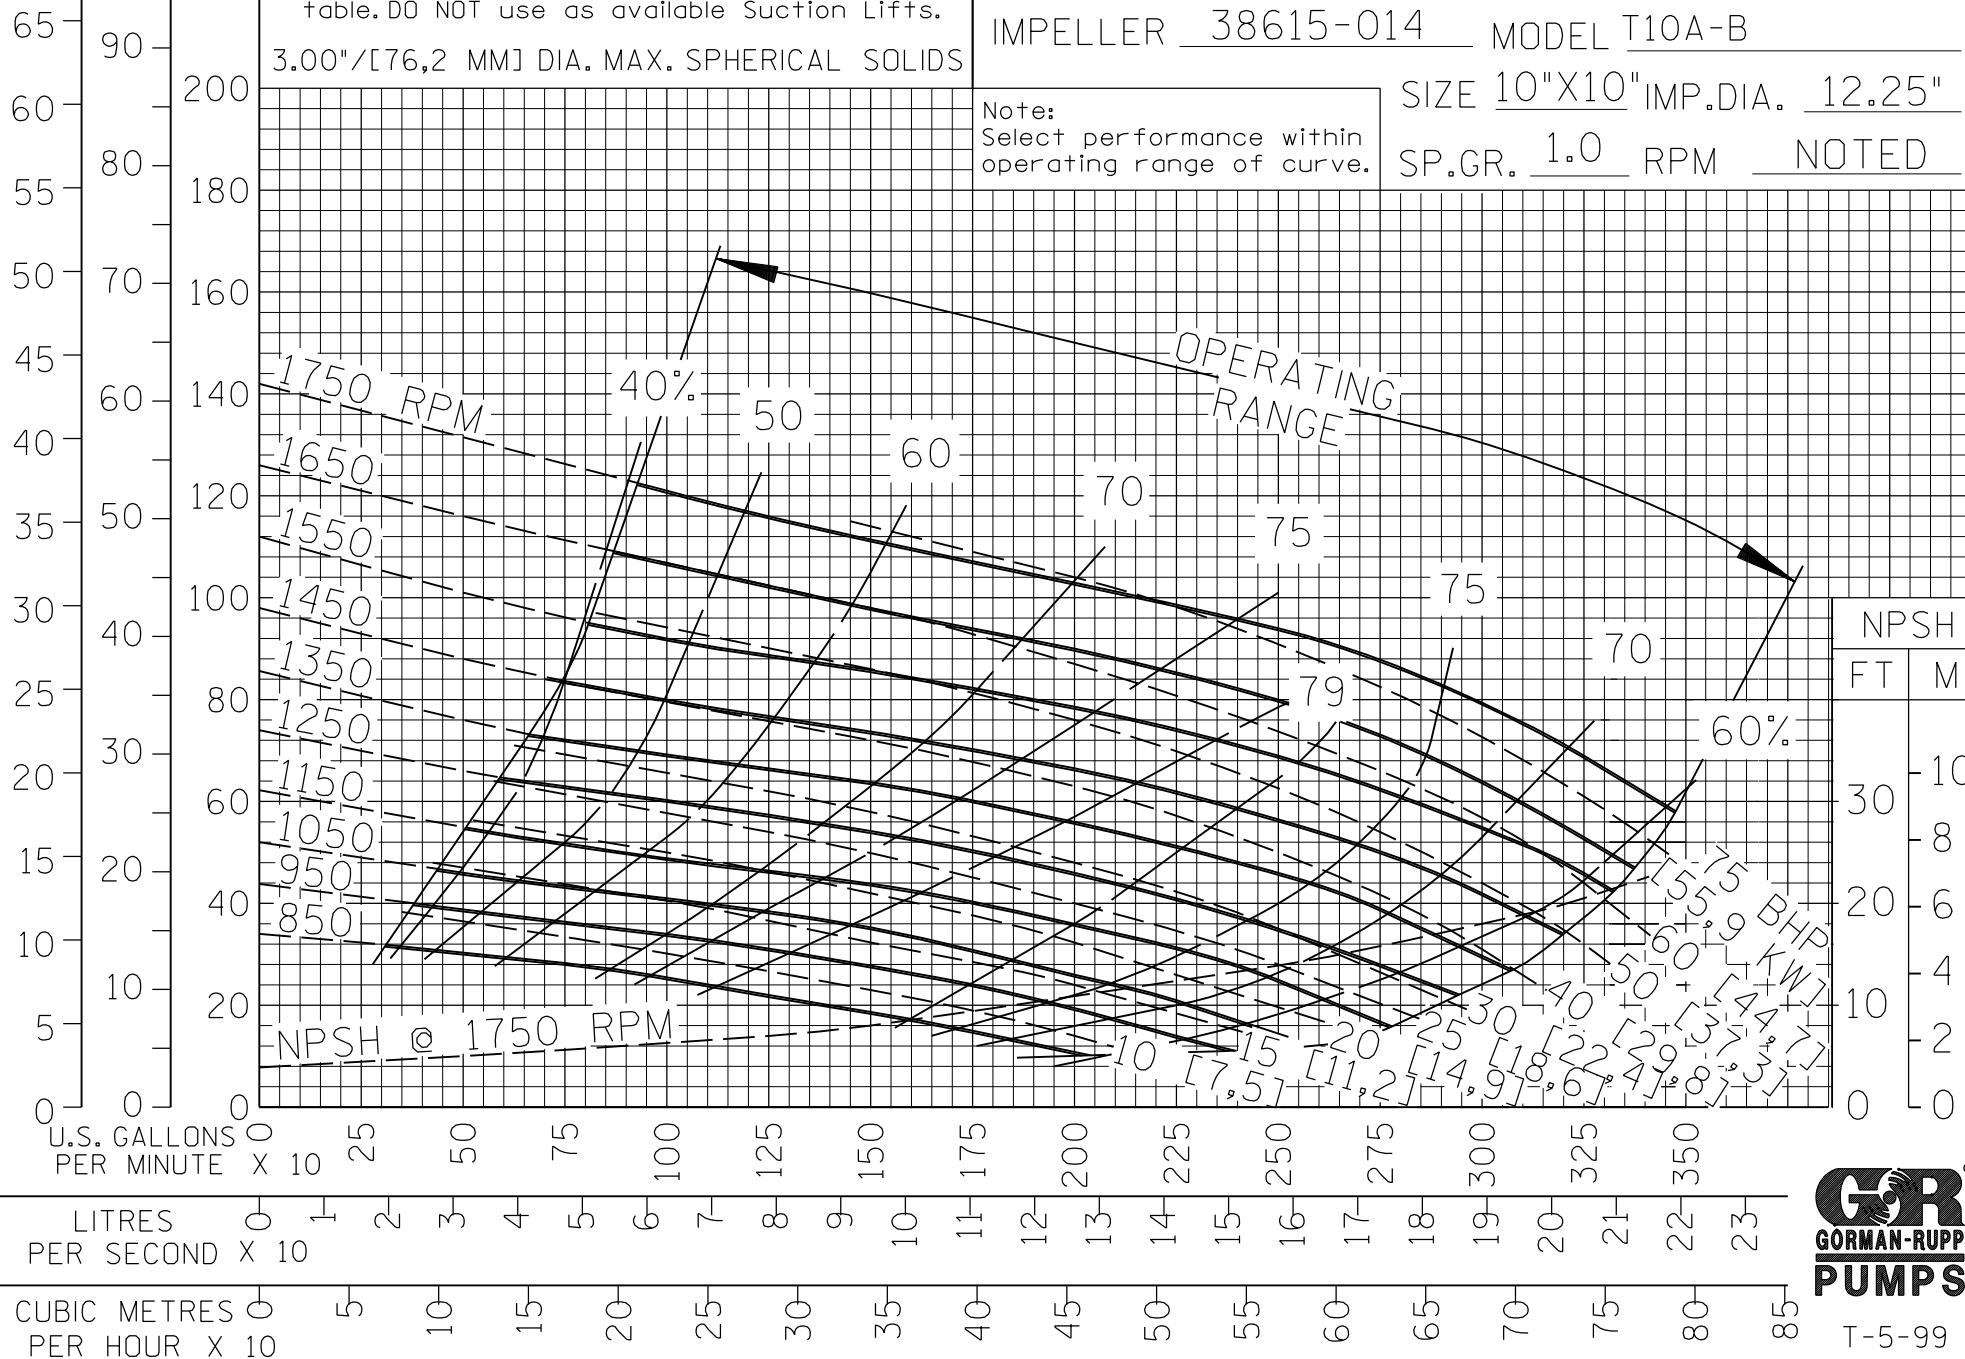

FILE NO. #10ab.s09



T-5-99