

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550	1650-1750	1850-2150
FEET	5	6	8	10	13	16	18	19	20	21	22	25
METERS	1,5	1,8	2,4	3,1	4,0	4,9	5,5	5,8	6,1	6,4	6,7	7,6


PERFORMANCE CURVE

VOLUTE 11405D
 11405B CURVE T3A-B-4
 IMPELLER 11406 MODEL T3A-B

Figure NPSH required prior to using above table.
 DO NOT use as available Suction Lift.
 2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS

Note:
 Select performance within
 operating range of curve.

SIZE 3"X3" IMP.DIA. 8.75"
 SP.GR. 1.0 RPM NOTED

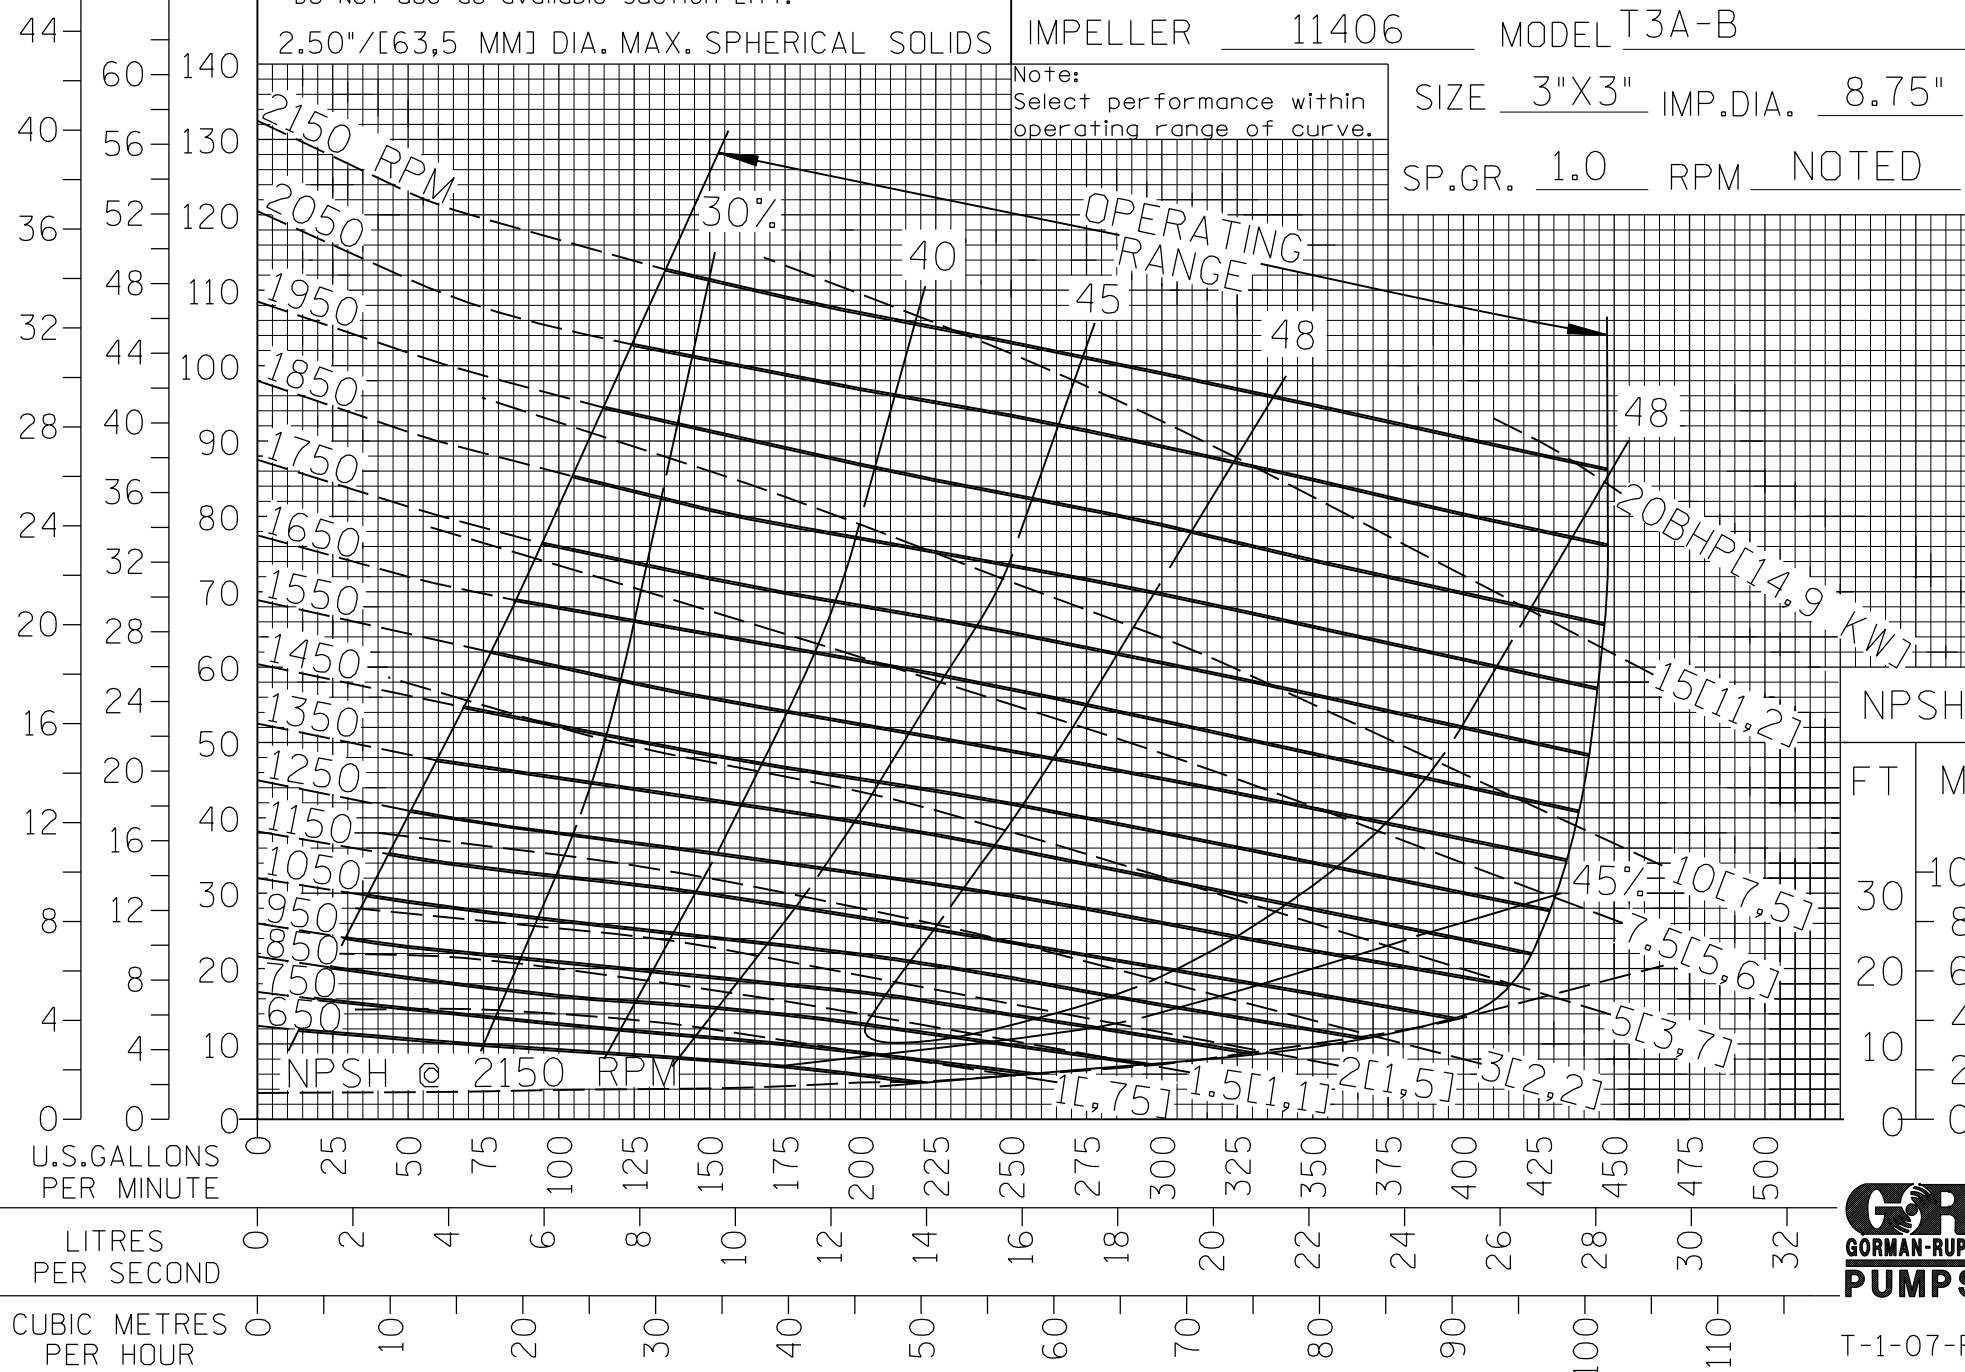

FILE NO. t3ab.s04



T-1-07-R