

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450-1550	1650-1850	1950	2050-2150
FEET	5	6	7	8	11	12	13	14	17	20	23	24
METERS	1,5	1,8	2,1	2,4	3,4	3,7	4	4,3	5,2	6,1	7	7,3

Figure NPSH required prior to using above table. DO NOT use as available Suction Lift.

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 11405D
 11405B CURVE T3A-B-5

IMPELLER 11406 MODEL T3A-B

Note:
 Select performance within operating range of curve.

SIZE 3"X3" IMP.DIA. 8.50"

SP.GR. 1.0 RPM NOTED

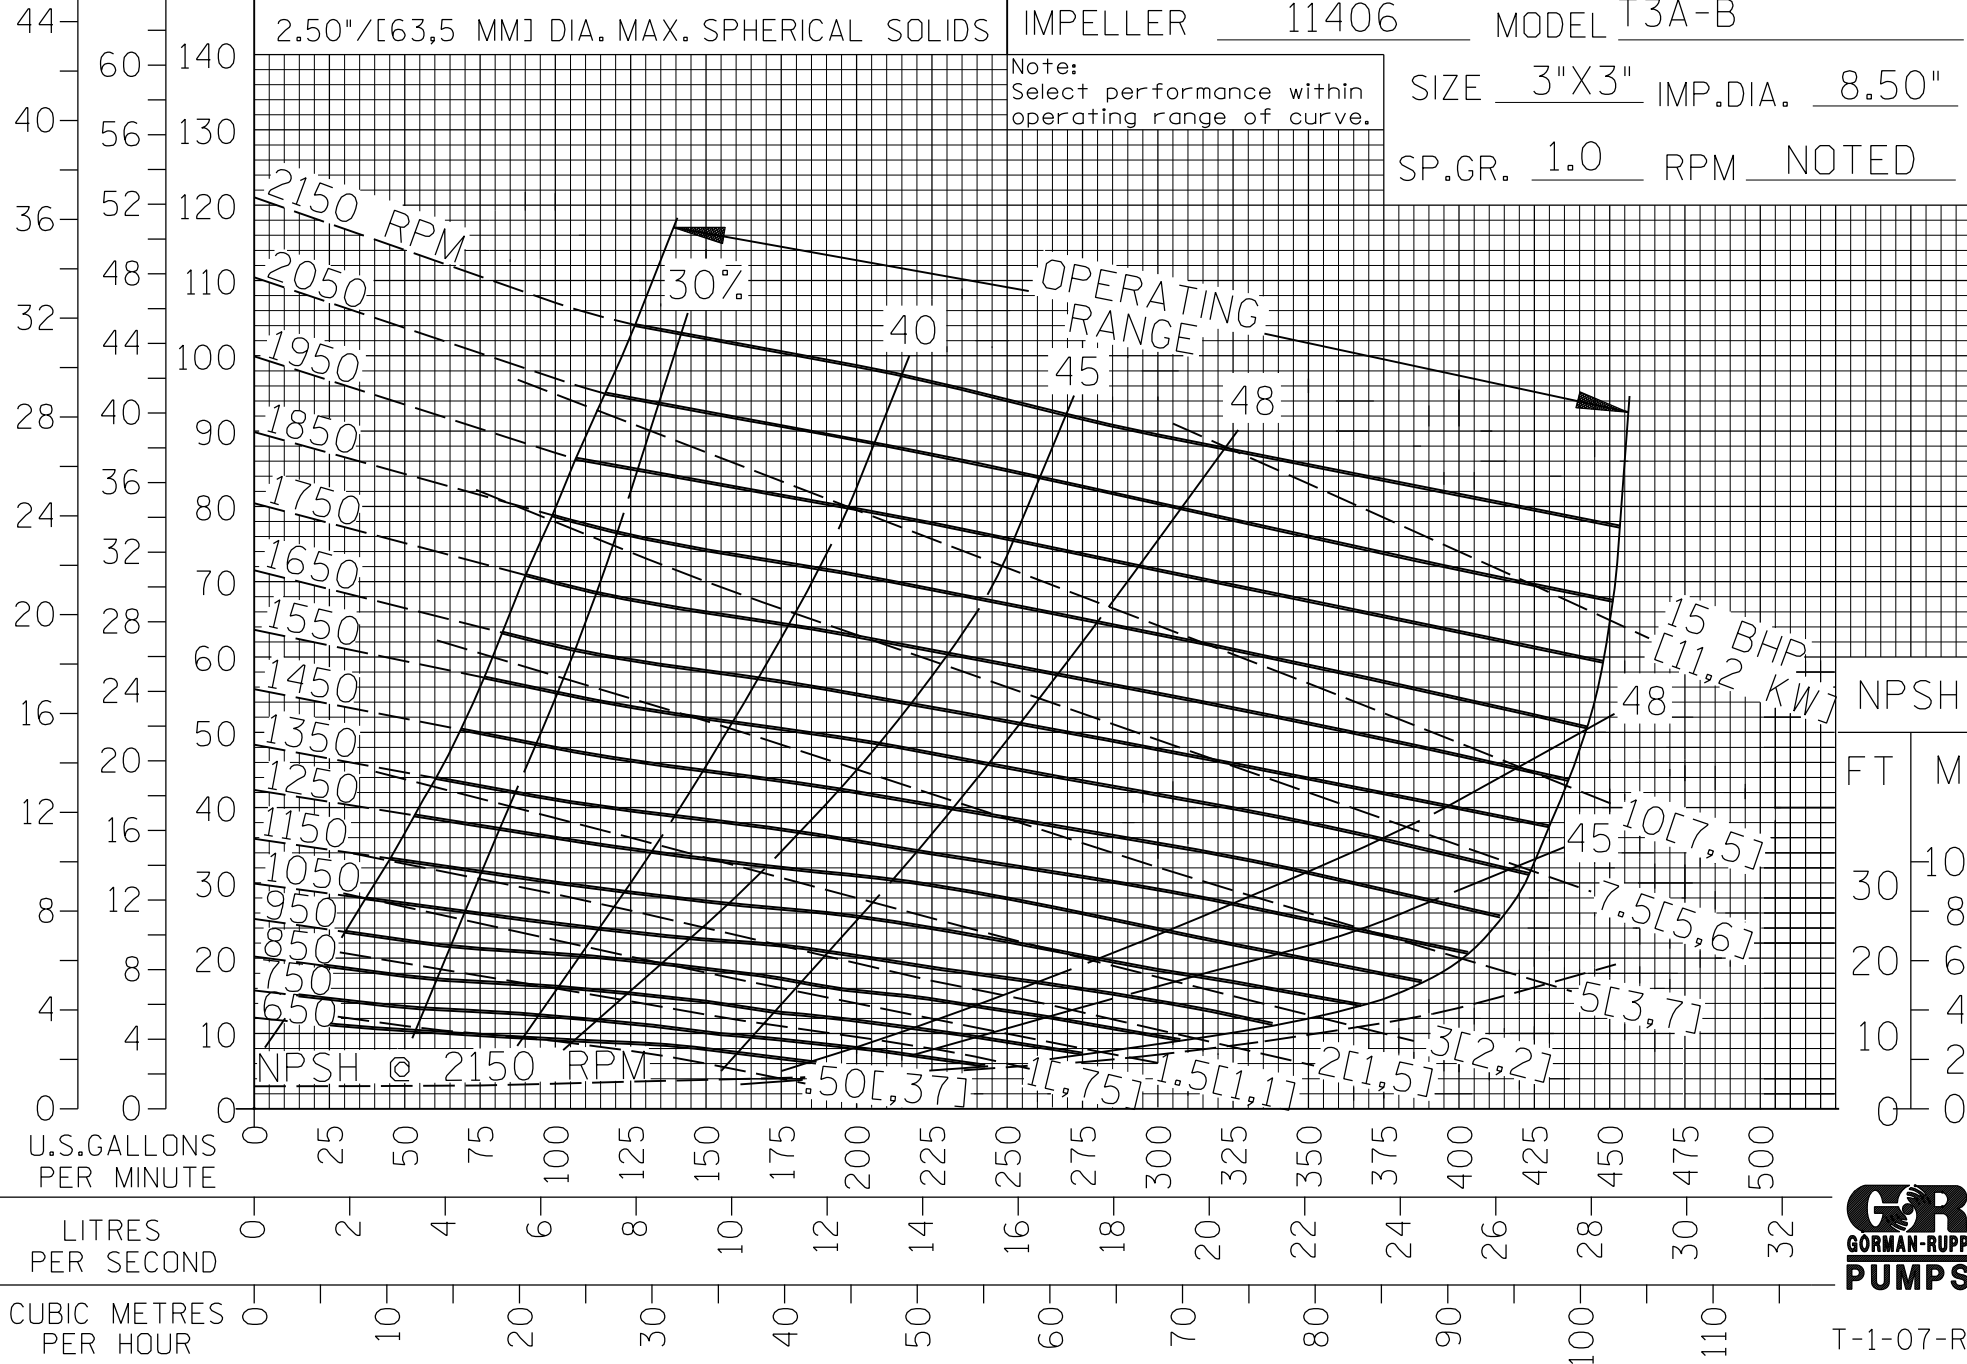

FILE NO. t3ab.s05



T-1-07-R