

TOTAL HEAD

REPRIMING LIFTS

| | | | | | | | | | | | | |
|--------|-----|-----|-----|-----|-----------|------|------|------|------|------|------|------|
| RPM | 650 | 750 | 850 | 950 | 1050-1450 | 1550 | 1650 | 1750 | 1850 | 1950 | 2050 | 2150 |
| FEET | 4 | 5 | 6 | 7 | 9 | 12 | 14 | 16 | 20 | 22 | 23 | 24 |
| METERS | 1,2 | 1,5 | 1,8 | 2,1 | 2,7 | 3,7 | 4,3 | 4,9 | 6,1 | 6,7 | 7 | 7,3 |

Figure NPSH required prior to using above table.
DO NOT use as available Suction Lift.

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 11405D
11405B CURVE T3A-B-6

IMPELLER 11406 MODEL T3A-B

Note: Select performance within operating range of curve.

SIZE 3"X3" IMP.DIA. 8.25"

SP.GR. 1.0 RPM NOTED

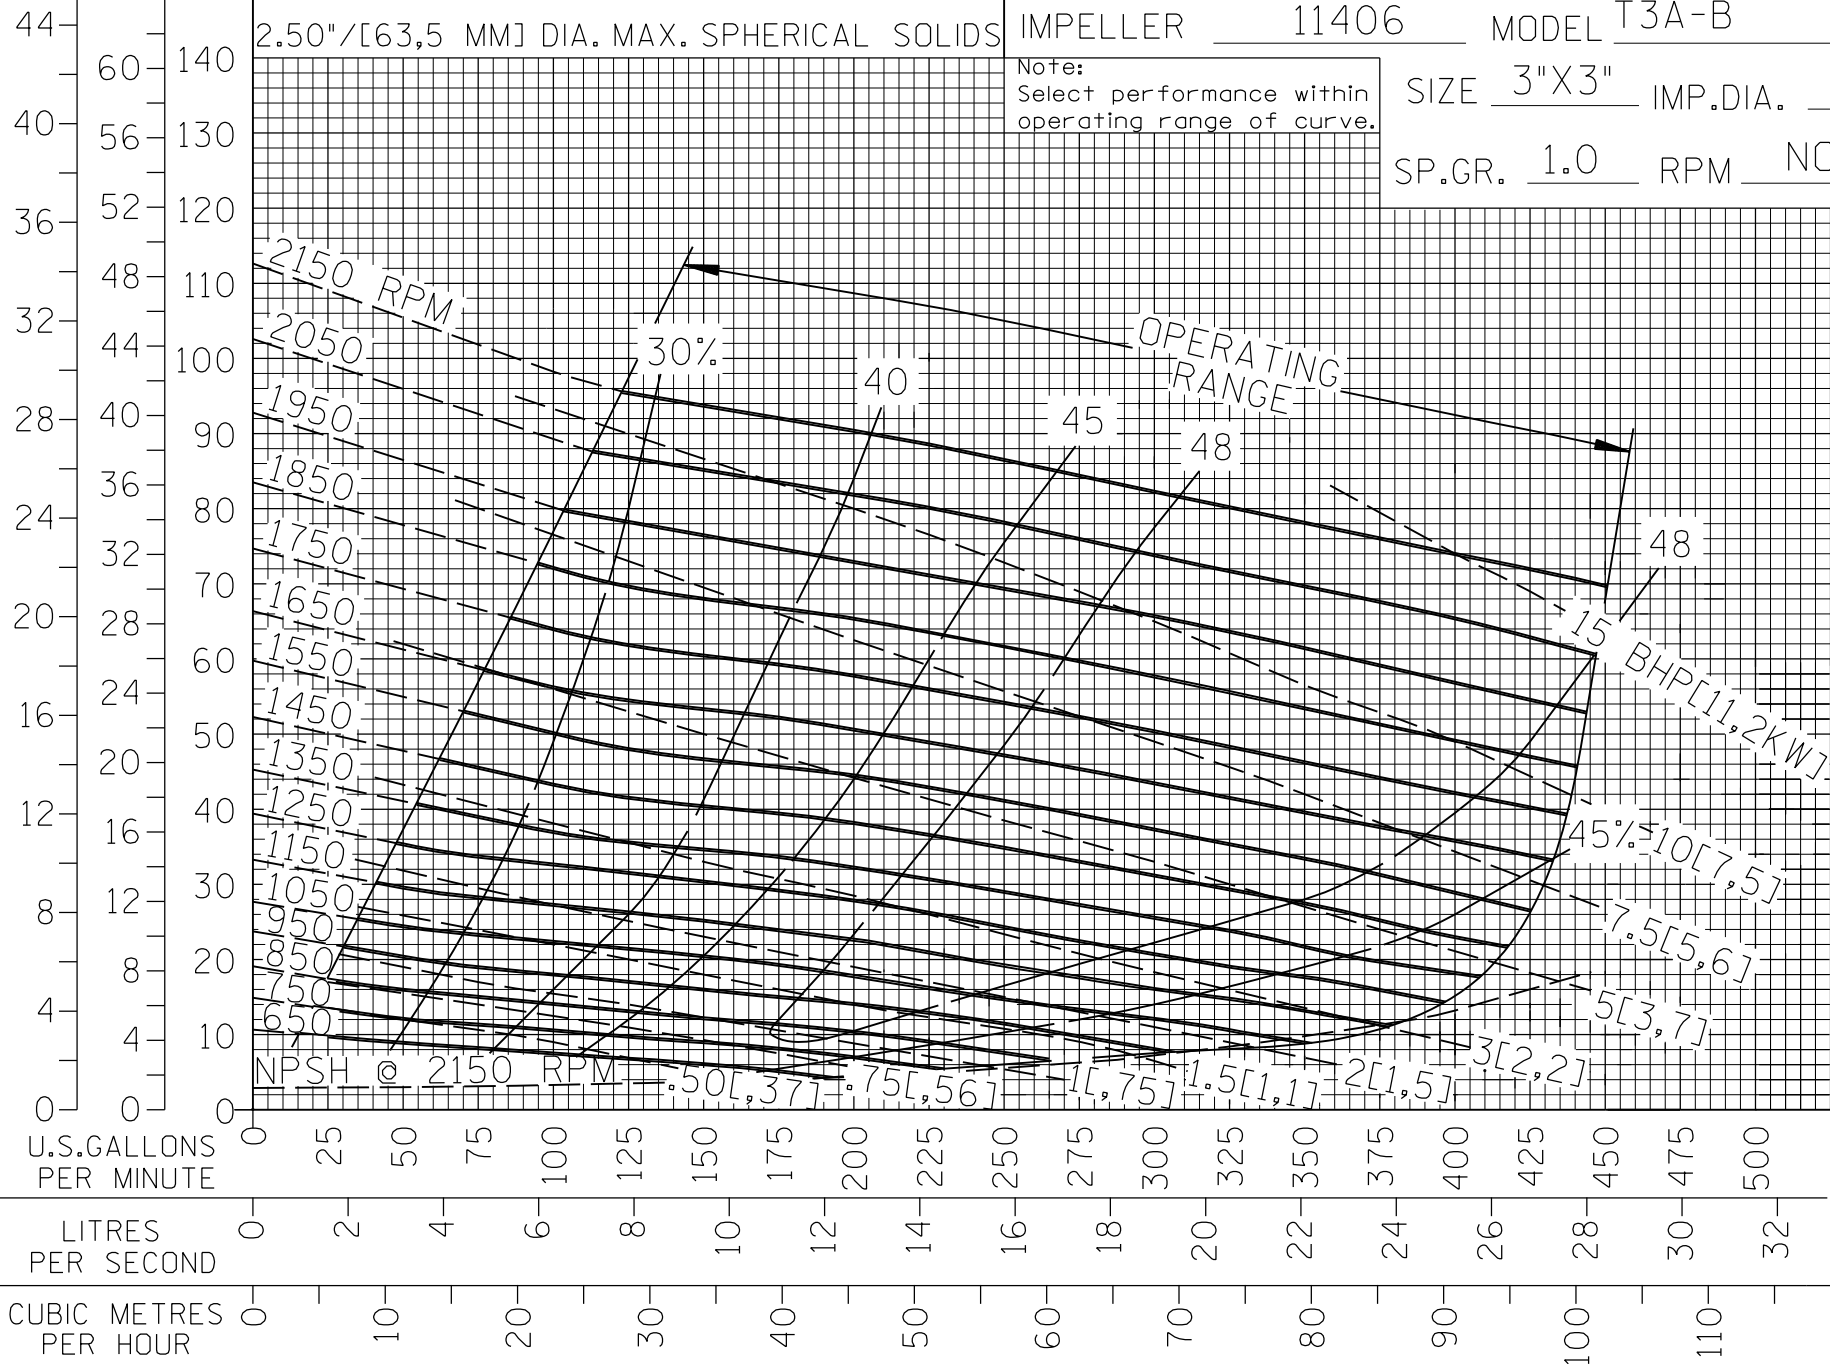

FILE NO. t3ab.s06

NPSH
FT M



T-1-07-R