

TOTAL HEAD

REPRIMING LIFTS

PERFORMANCE CURVE

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150
FEET	4	5	6	7	8	9	10	11	12	13	16	19	21	23		
METERS	1,2	1,5	1,8	2,1	2,4	2,7	3,1	3,4	3,7	3,9	4,9	5,8	6,4	7		


Figure NPSH required prior to using above table.  
DO NOT use as available Suction Lift.

VOLUTE 11405D CURVE T3A-B-7  
11405B  
 IMPELLER 11406 MODEL T3A-B

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS

Note:  
Select performance within  
operating range of curve.

SIZE 3"X3" IMP.DIA. 8"  
 SP.GR. 1.0 RPM NOTED

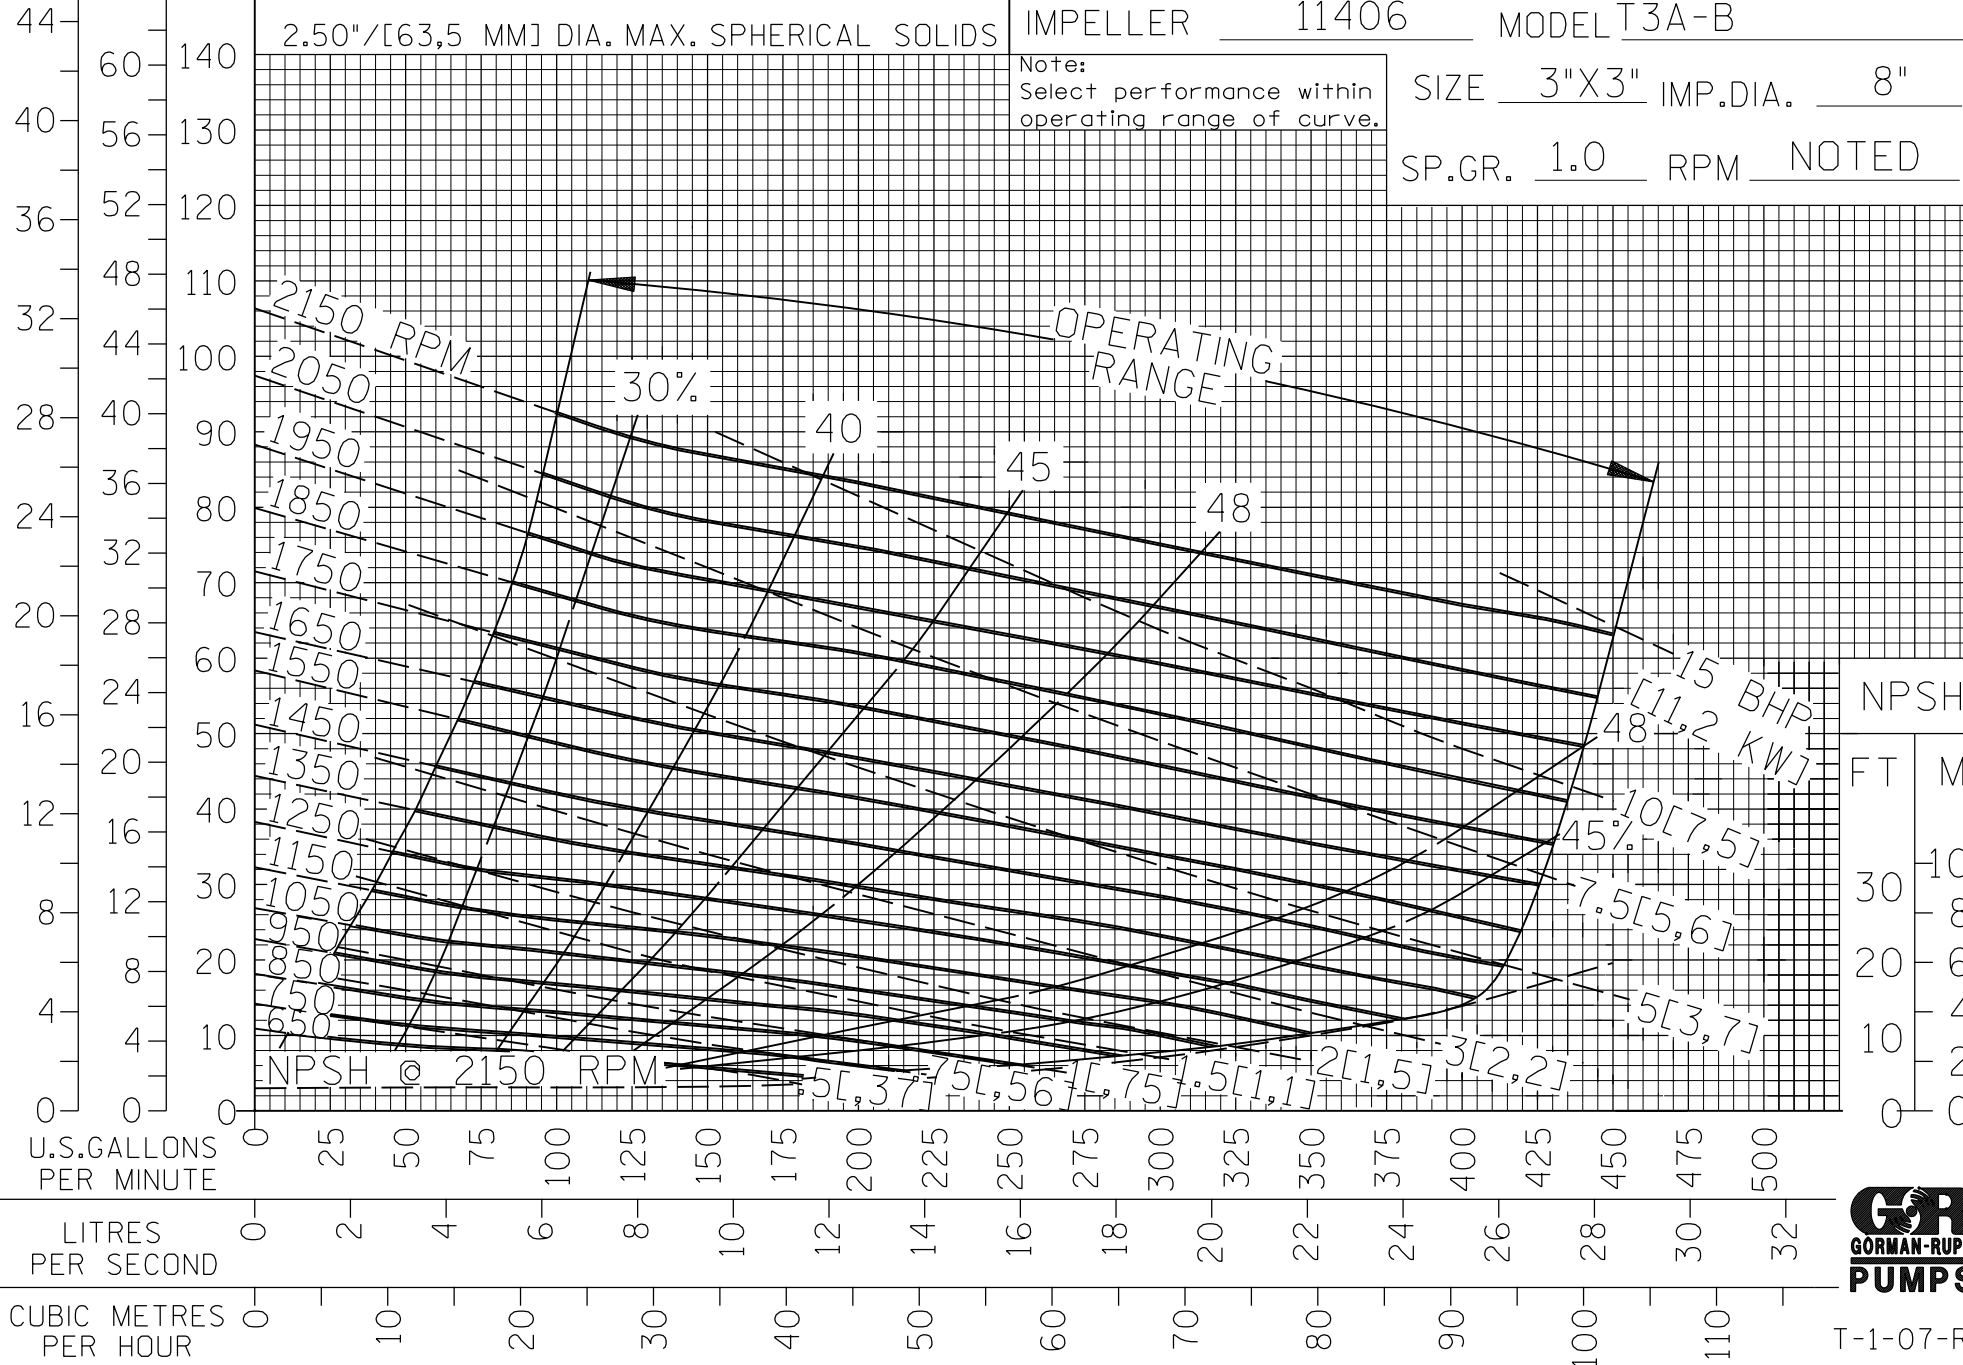

FILE NO. t3ab.s07

NPSH  
 FT M



T-1-07-R