

TOTAL HEAD

REPRIMING LIFTS

PERFORMANCE CURVE

RPM	650-850	950	1050	1150	1250-1450	1550	1650	1750	1850	1950	2050-2150
FEET	4	5	6	8	9	10	11	12	14	17	20
METERS	1,2	1,5	1,8	2,4	2,7	3,1	3,4	3,7	4,3	5,2	6,1

Figure NPSH required prior to using above table.
DO NOT use as available Suction Lifts.

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS


VOLUTE 11405D
11405B CURVE T3A-B-8

IMPELLER 11406 MODEL T3A-B

Note:
Select performance within
operating range of curve.

SIZE 3"X3" IMP.DIA. 7.75"

SP.GR. 1.0 RPM NOTED

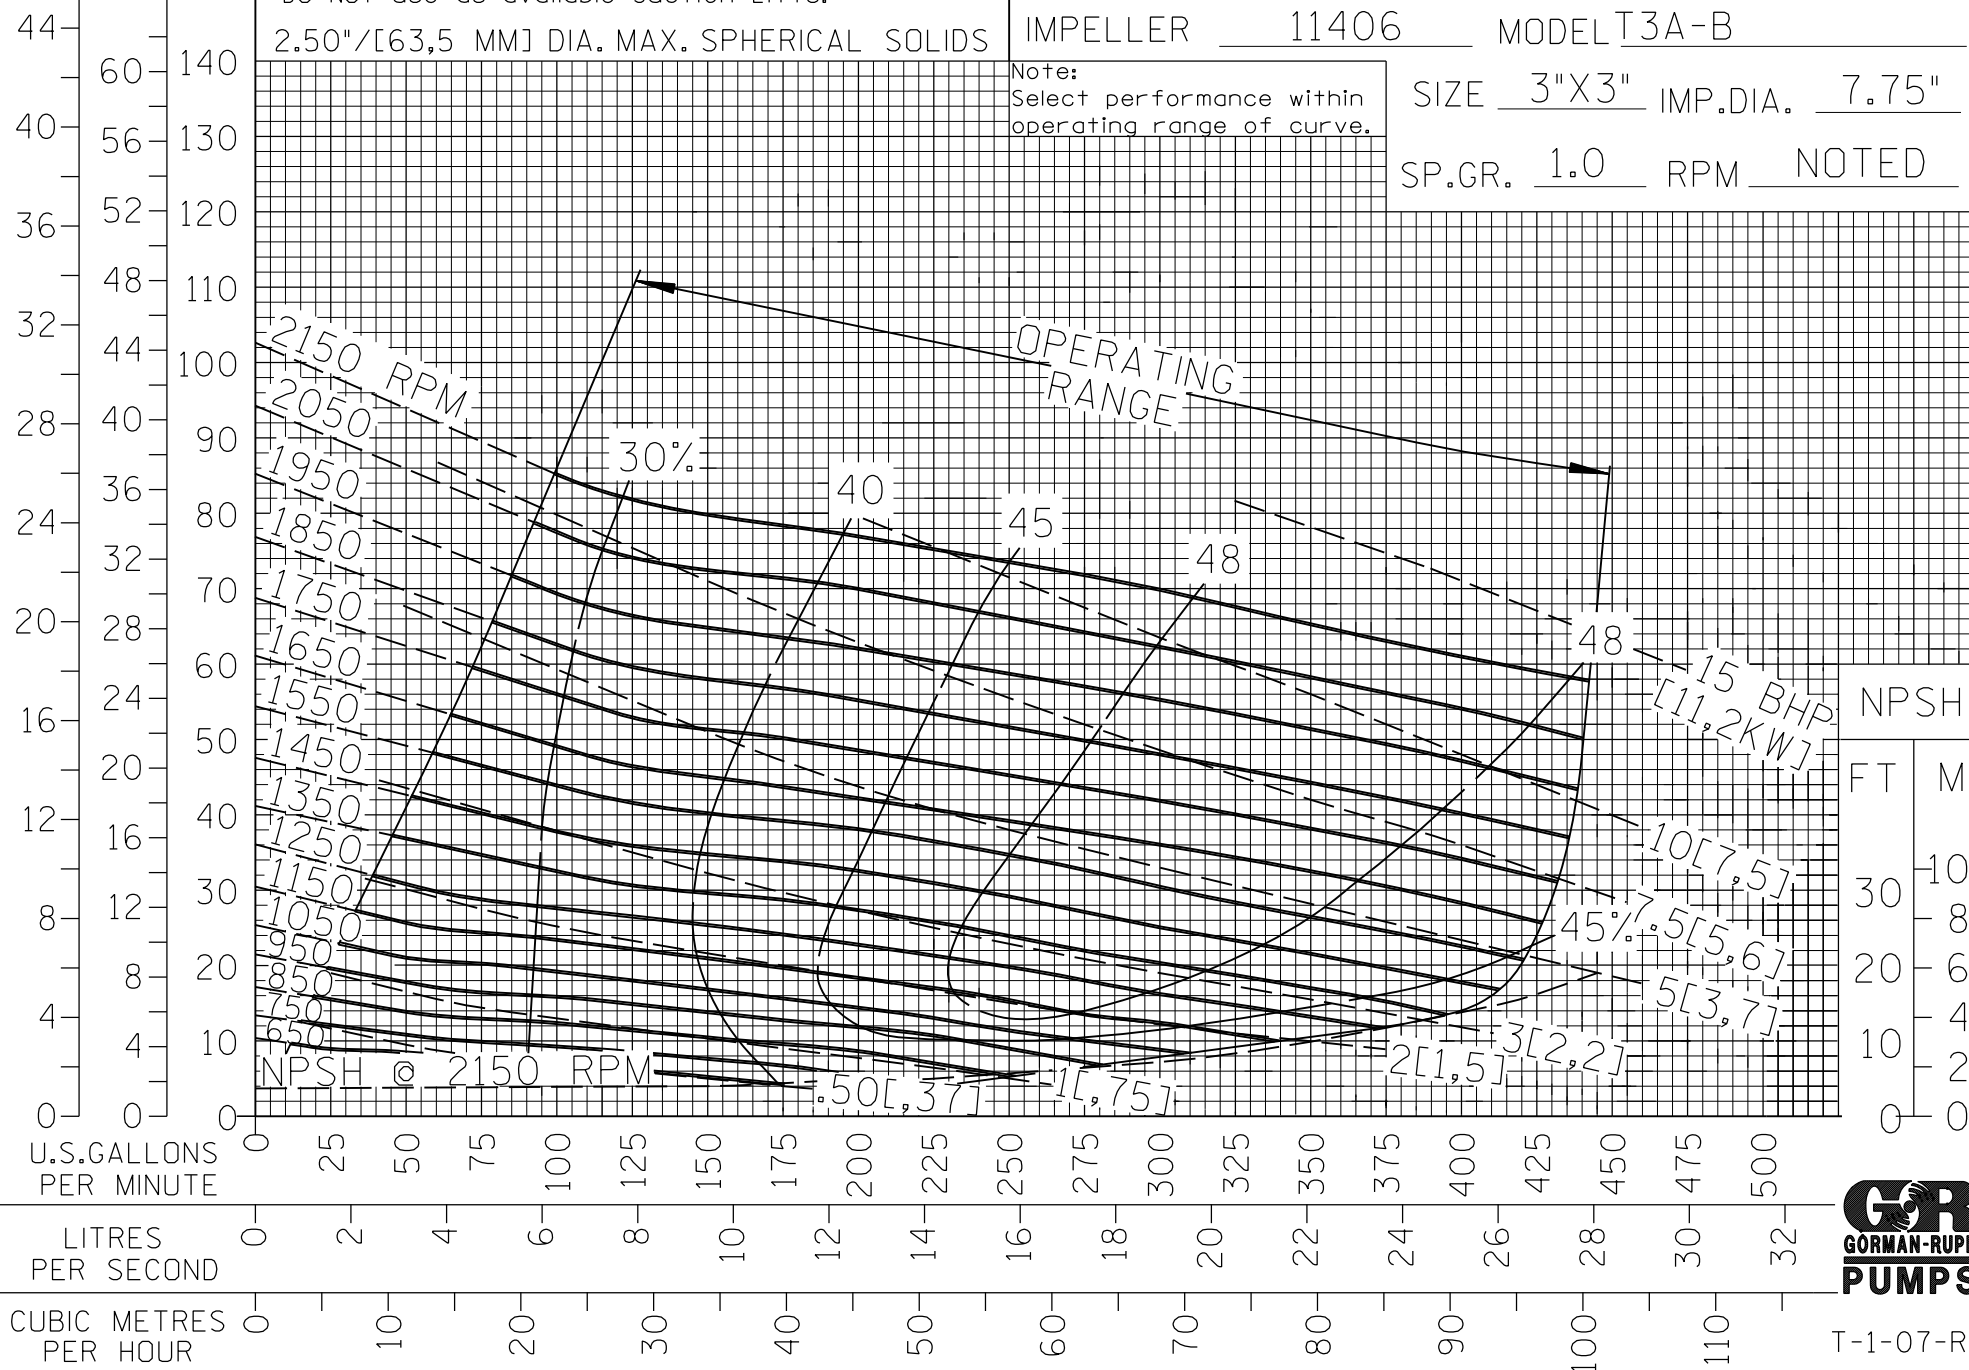

FILE NO. T3ab.s08



T-1-07-R