

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350-1950
FEET	5	8	13	16	19	22	23	25
METERS	1,5	2,4	4	4,9	5,8	6,7	7	7,6

Figure NPSH required prior to using above table.  
DO NOT use as available Suction Lift.


3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 10525D / 10525B CURVE T4A-B-5  
 IMPELLER 10528 MODEL T4A-B

Note:  
Select performance within  
operating range of curve.

SIZE 4"X4" IMP.DIA. 9.50"  
 SP.GR. 1.0 RPM NOTED

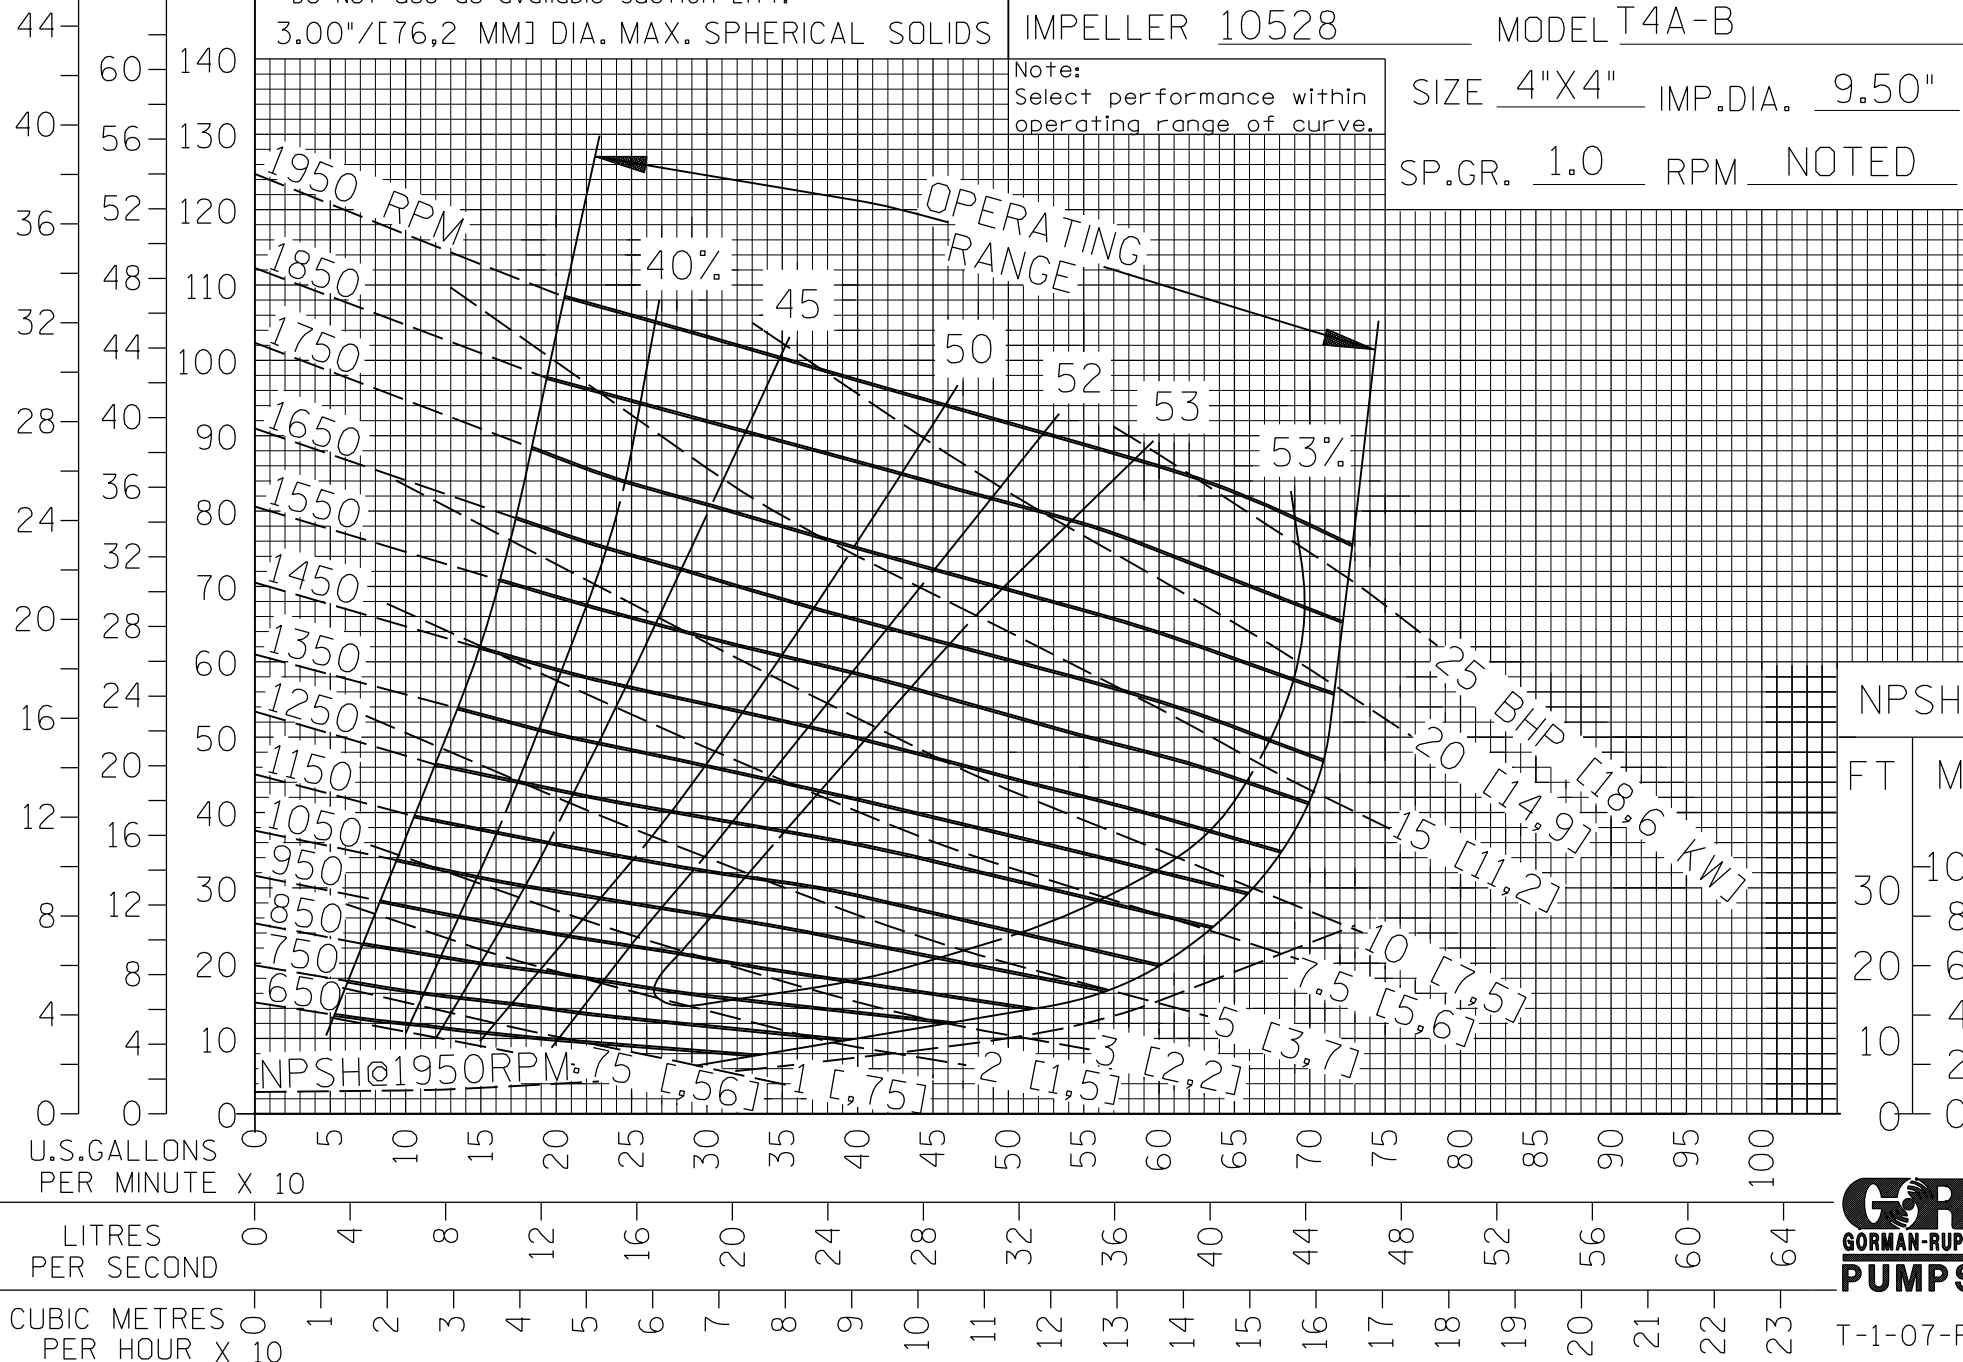

FILE NO. t4ab.s05



T-1-07-R