

TOTAL HEAD





REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750-1950
FEET	4	7	9	11	14	16	17	19	20	22	24	25
METERS	1,2	2,1	2,7	3,4	4,3	4,9	5,2	5,8	6,1	6,7	7,3	7,6

PERFORMANCE CURVE

VOLUTE 10525D
 10525B CURVE T4A-B-6
 IMPELLER 10528 MODEL T4A-B
 Note: Select performance within operating range of curve.
 SIZE 4"X4" IMP.DIA. 9.25"
 SP.GR. 1.0 RPM NOTED

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

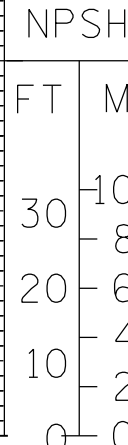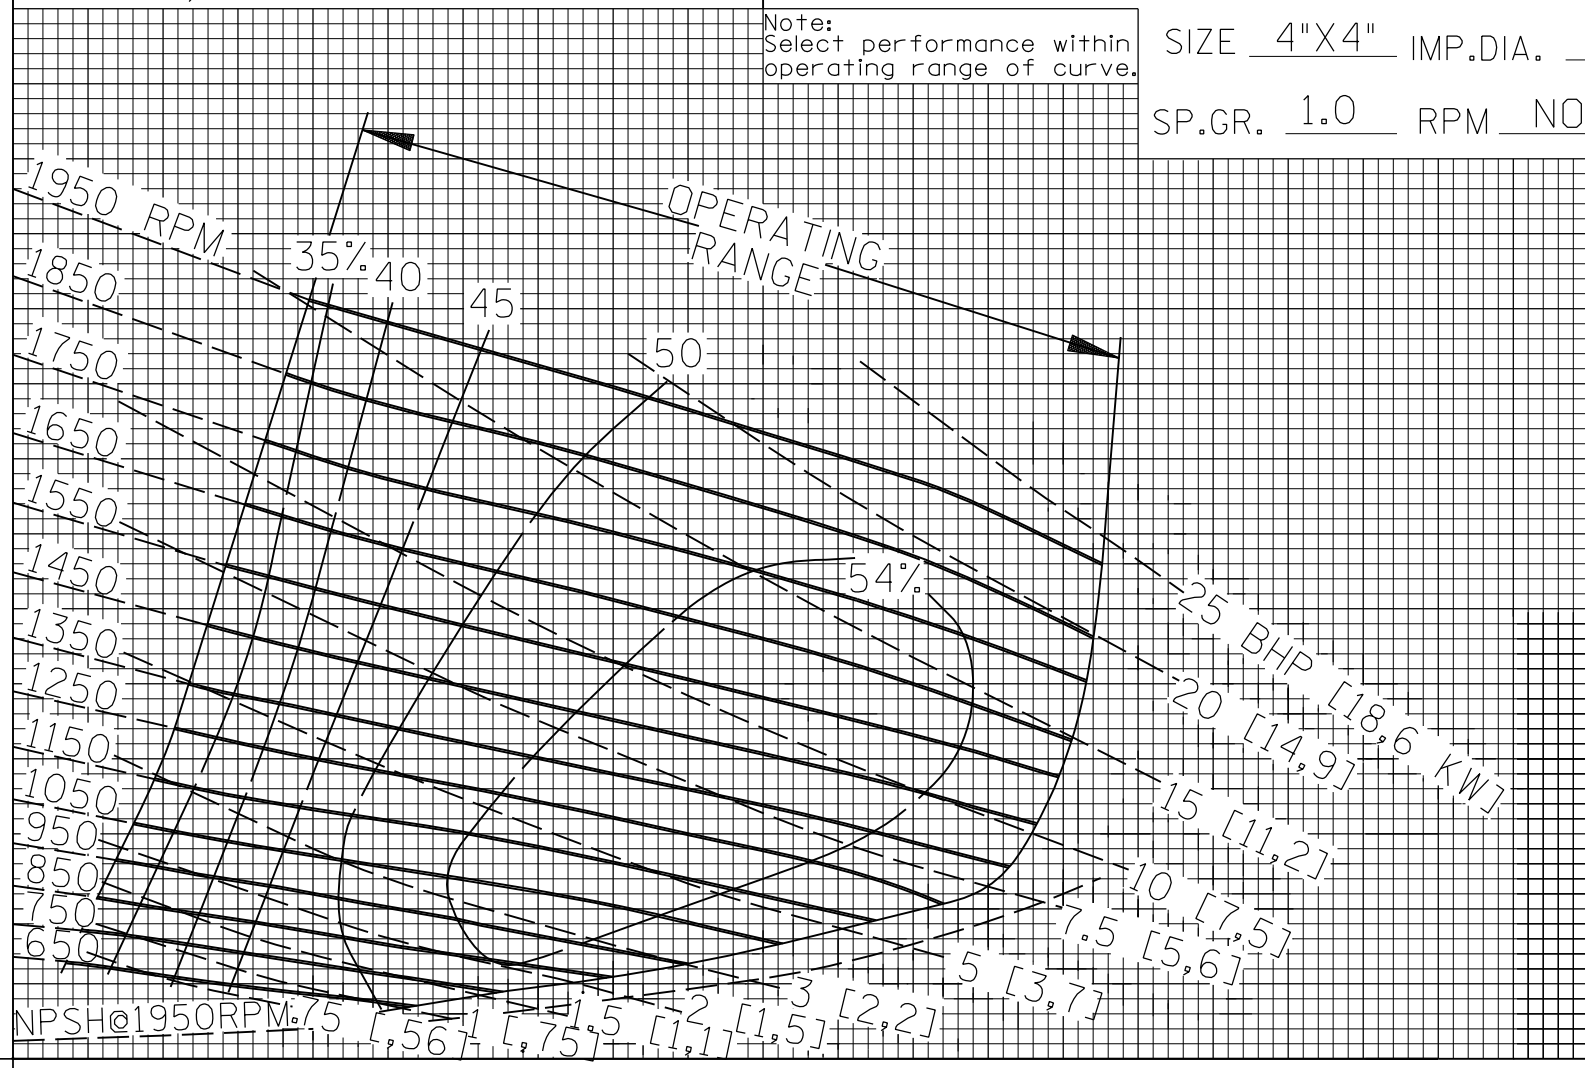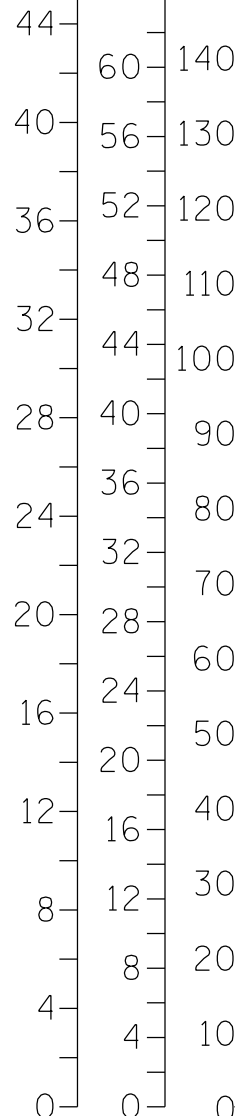

FILE NO. T4ab.s06



T-1-07-R