

TOTAL HEAD


REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550	1650	1750-1950
FEET	3	5	7	8	12	13	14	17	19	21	22	23
METERS	.91	1.5	2.1	2.4	3.7	3.9	4.3	5.2	5.8	6.4	6.7	7

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.  
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 10525D CURVE T4A-B-7  
 10525B  
 IMPELLER 10528 MODEL T4A-B  
 Note: Select performance within operating range of curve.  
 SIZE 4"X4" IMP.DIA. 9"  
 SP.GR. 1.0 RPM NOTED

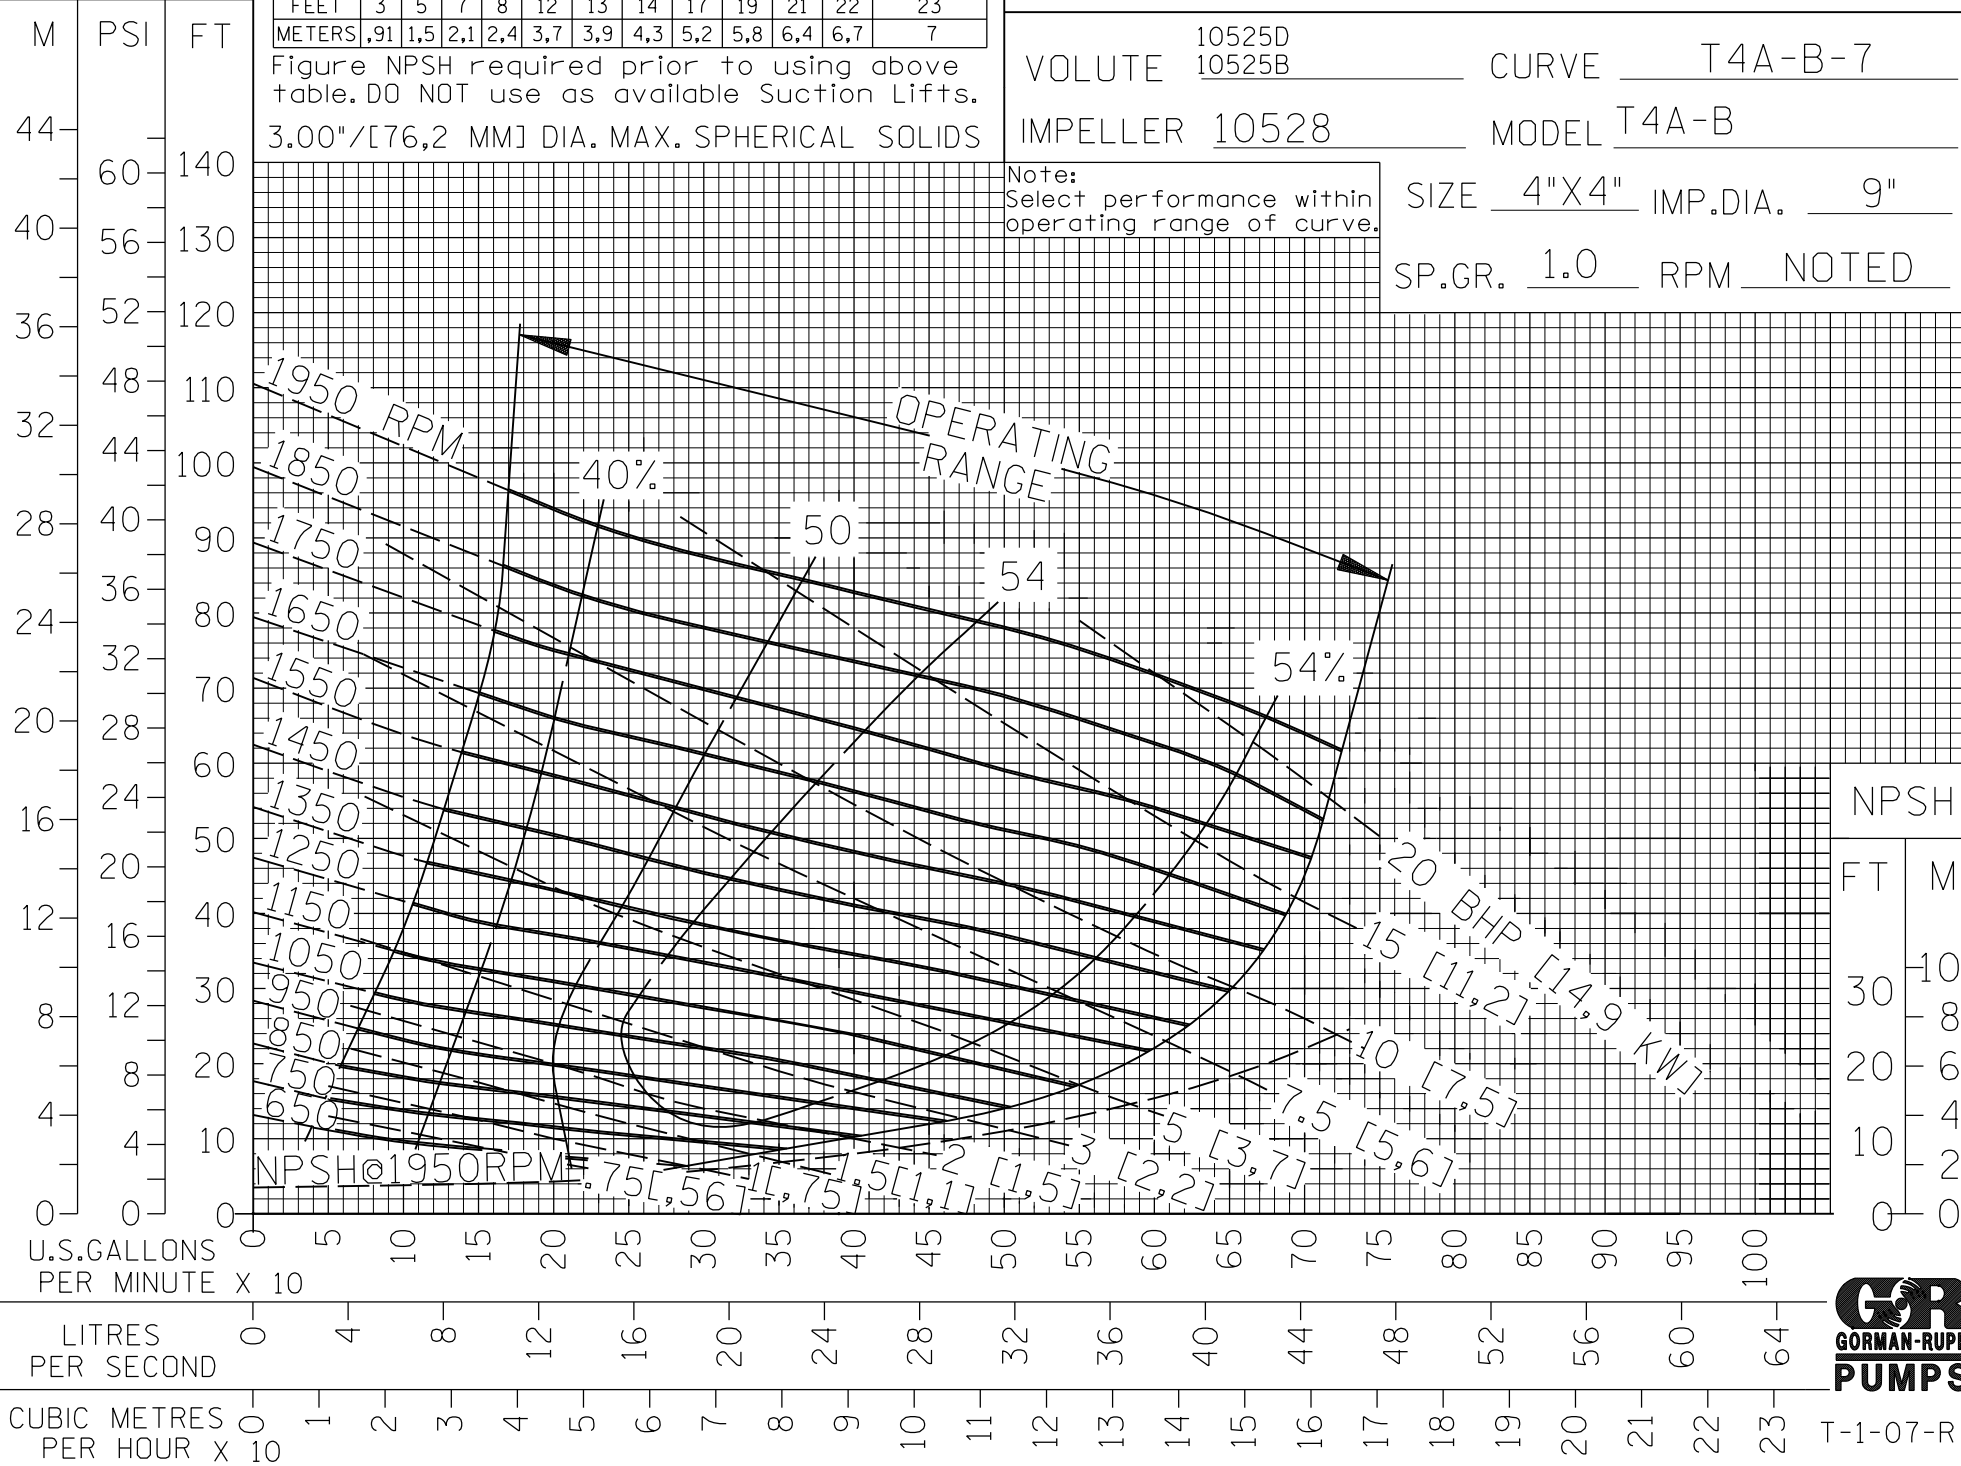

FILE NO. t4cb.s07



T-1-07-R