

TOTAL HEAD

REPRIMING LIFTS

RPM	650	850	1150	1450	1750	2050	2450
FEET	4	7	17	23	23	20	22
METERS	1.2	2.1	5.2	7.0	7.0	6.1	6.7

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts. 1.50"/[38.1 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 10525D CURVE T4DS-B-4

IMPELLER 38615-129 MODEL T4DS-B

Select performance within operating range of curve.

SIZE 4"X4" IMP.DIA. 9.75"

SP.GR. 1.0 RPM NOTED

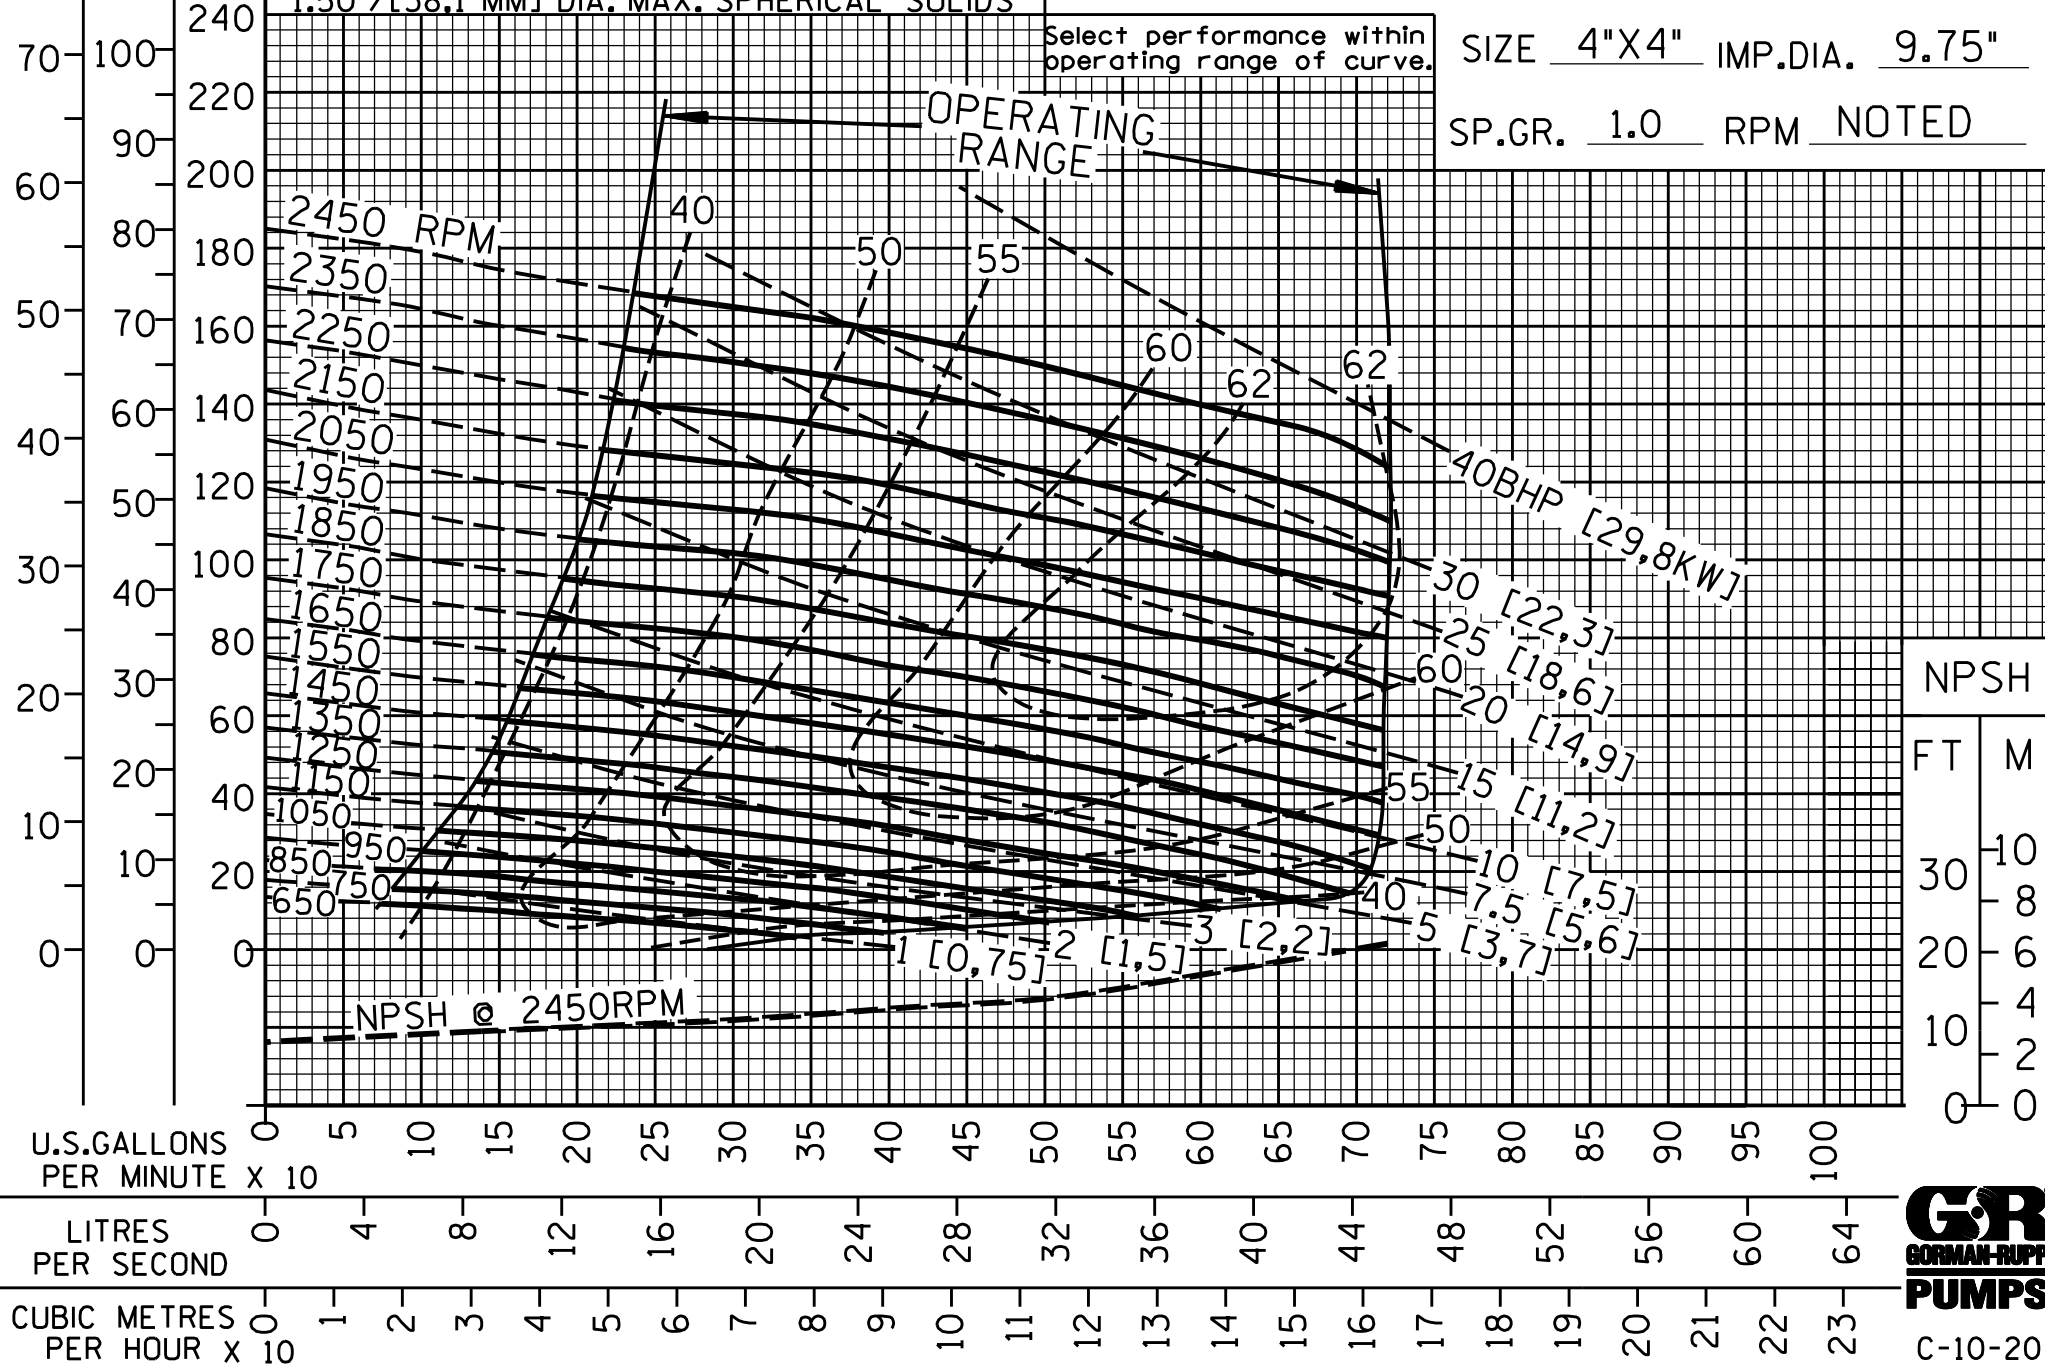

C-10-20