

TOTAL HEAD

REPRIMING LIFTS

DIA.	11"	11.25"	11.50"
FEET	21	22	24
METERS	6,4	6,7	7,3

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS


PERFORMANCE CURVE

VOLUTE 10957E CURVE T6A-B-1
 IMPELLER 10958 MODEL T6A-B
 38615-087

Note:
Select performance within operating range of curve.

SIZE 6"X6" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1750

Consult factory on operating conditions above 1500 rpm when TDSL exceeds 19 ft.

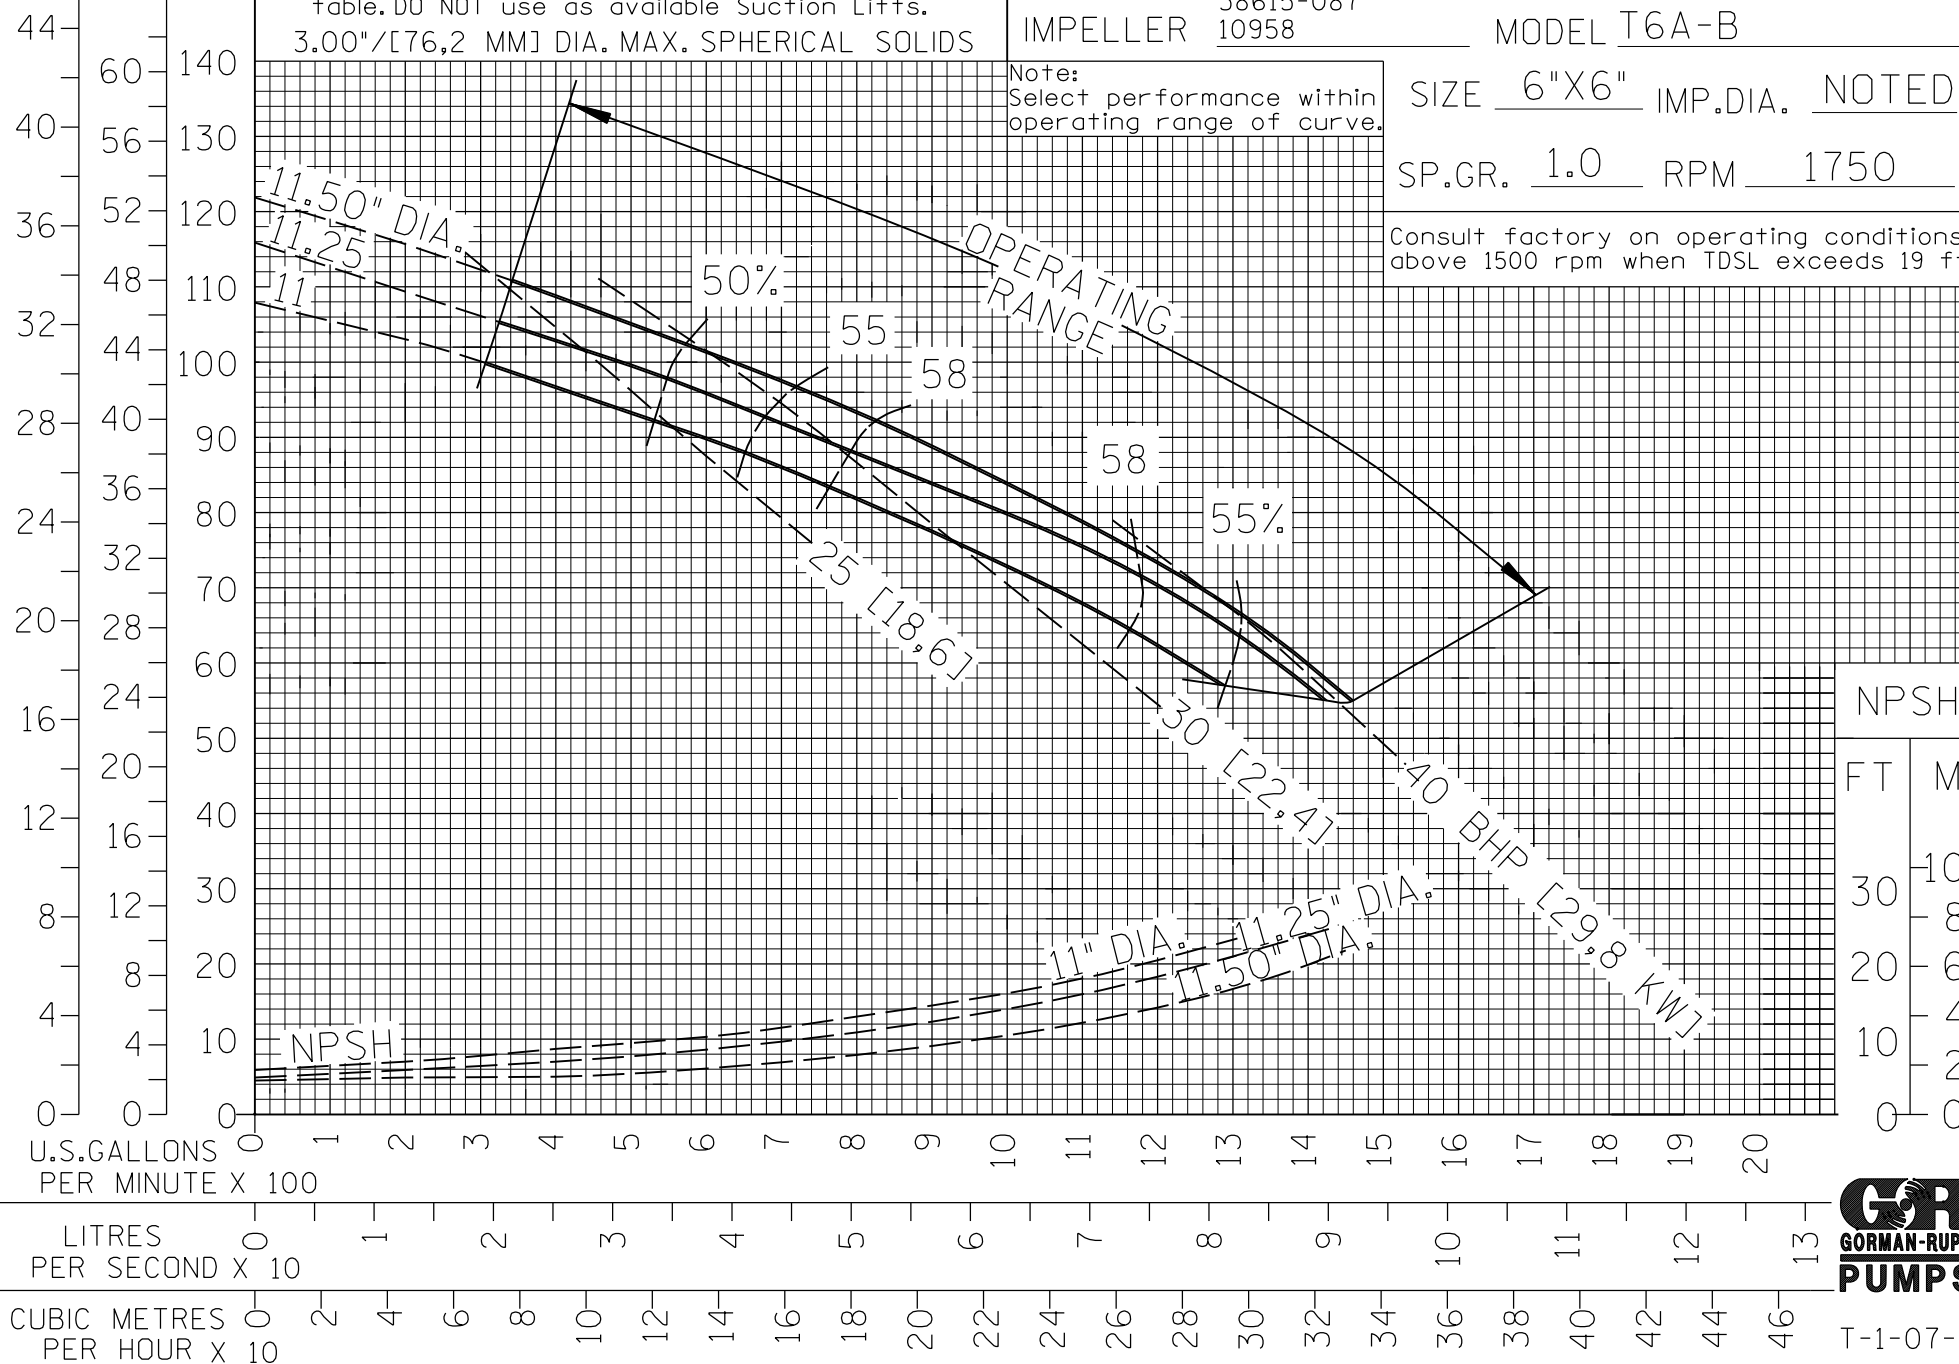

FILE NO. t6ab.s01



T-1-07-R