

TOTAL HEAD

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS
 CURVE FOR PARALLEL APPLICATION ONLY &
 SHOULD NOT BE USED FOR SINGLE PUMP
 PERFORMANCE

PERFORMANCE CURVE

VOLUTE 10957E 10957C CURVE T6A-B-12
 IMPELLER 38615-087 10958 MODEL T6A-B


NOTE: See single pump curve for
 horsepower, efficiency, & NPSH

SIZE 6"X6" IMP.DIA. 12.38"

SP.GR. 1.0 RPM NOTED

Consult factory on operating conditions
 above 1350 rpm when TDSL exceeds 20 ft.

2 PUMPS IN PARALLEL

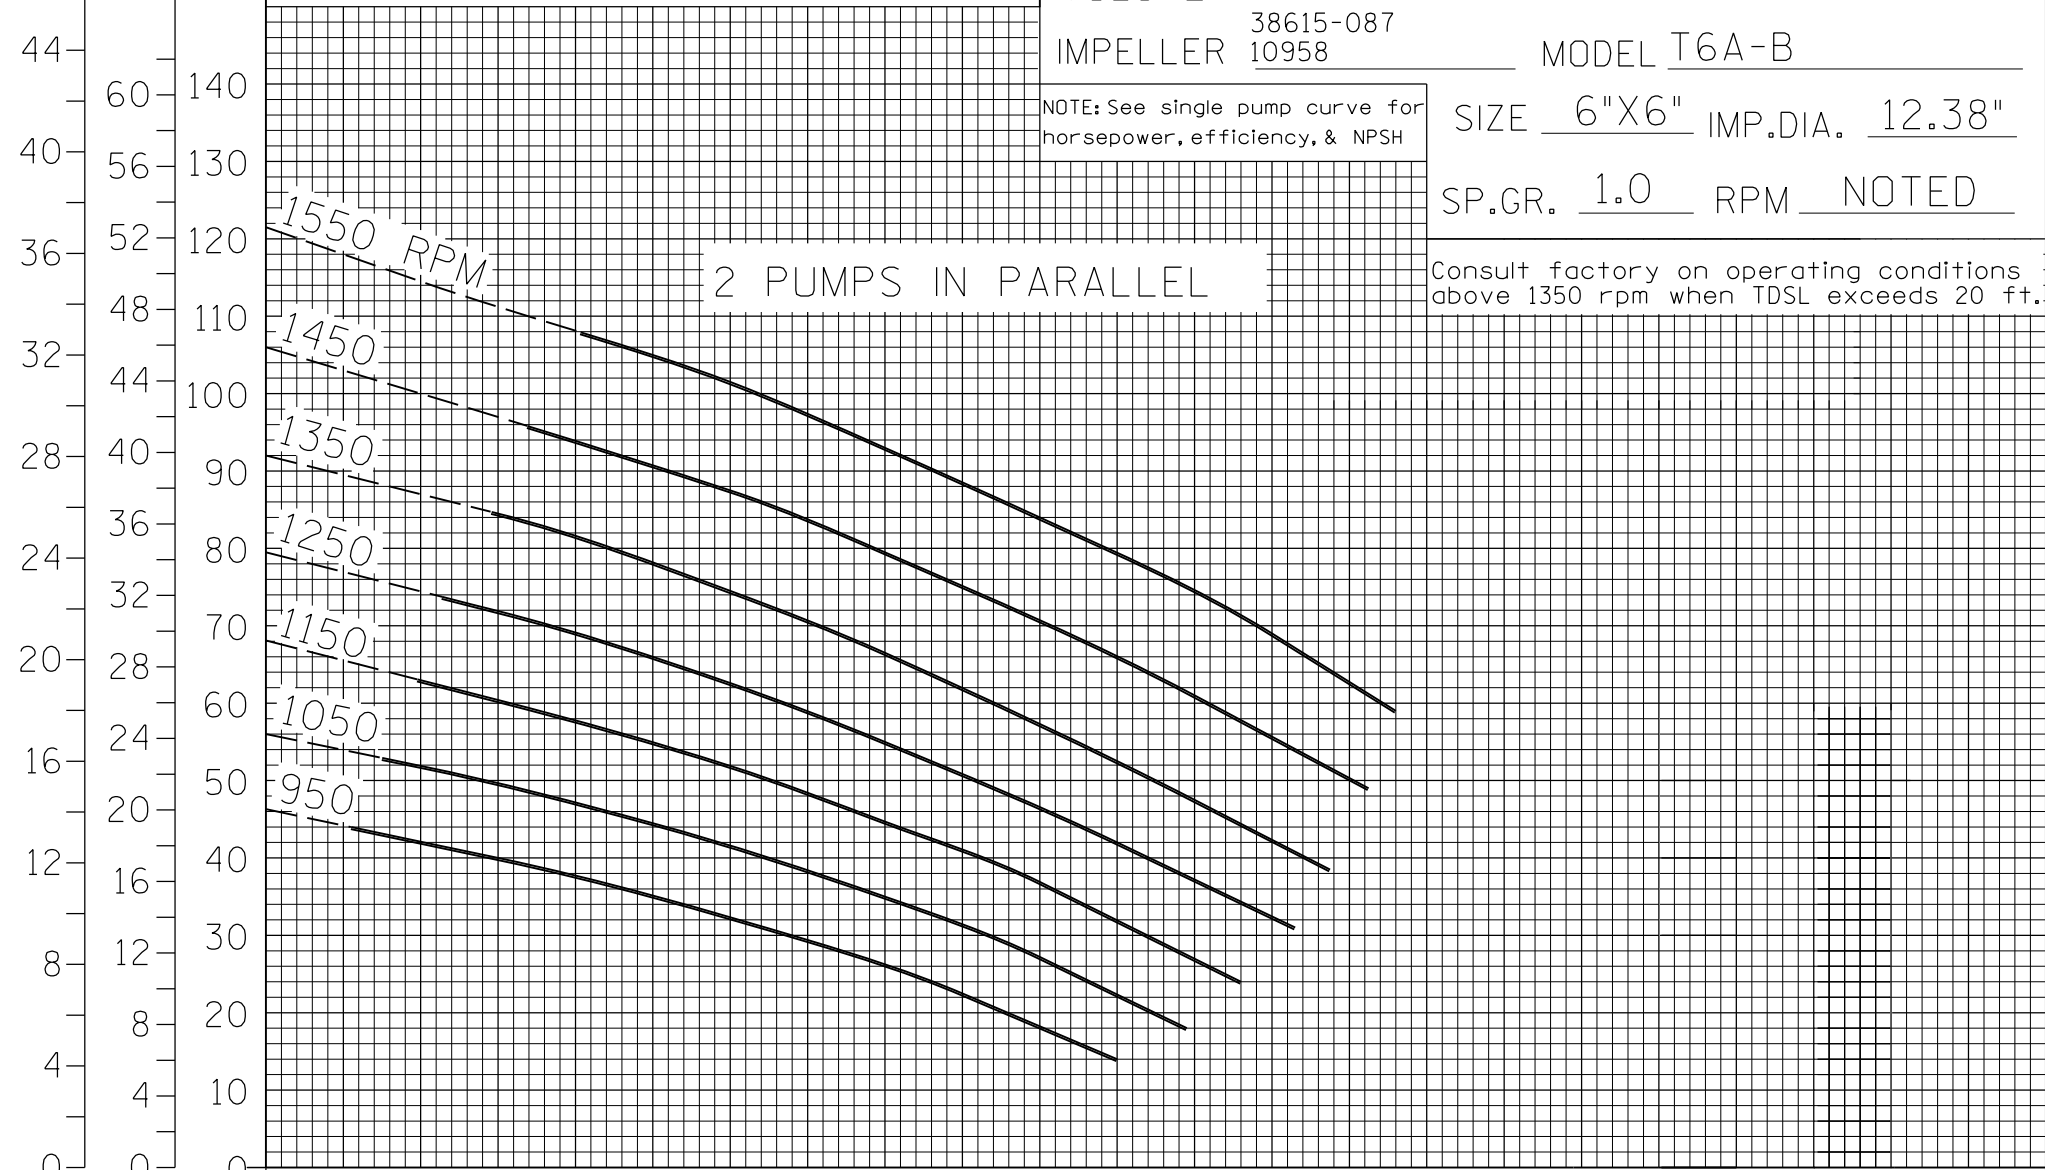

U.S. GALLONS PER MINUTE X 100
 LITRES PER SECOND X 10
 CUBIC METRES PER HOUR X 100



C-8-09-R

FILE NO. +6ab.sl2