

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550	1650
FEET	7	8	9	11	14	16	18	19	20	22	23
METERS	2,1	2,4	2,7	3,4	4,3	4,9	5,5	5,8	6,1	6,7	7

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts. 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 10957E  
 10957C CURVE T6A-B-6  
 IMPELLER 38615-087  
 10958 MODEL T6A-B

Note:  
 Select performance within operating range of curve.

SIZE 6"X6" IMP.DIA. 11.75"

SP.GR. 1.0 RPM NOTED

Consult factory on operating conditions above 1500 rpm when TDSL exceeds 19 ft.

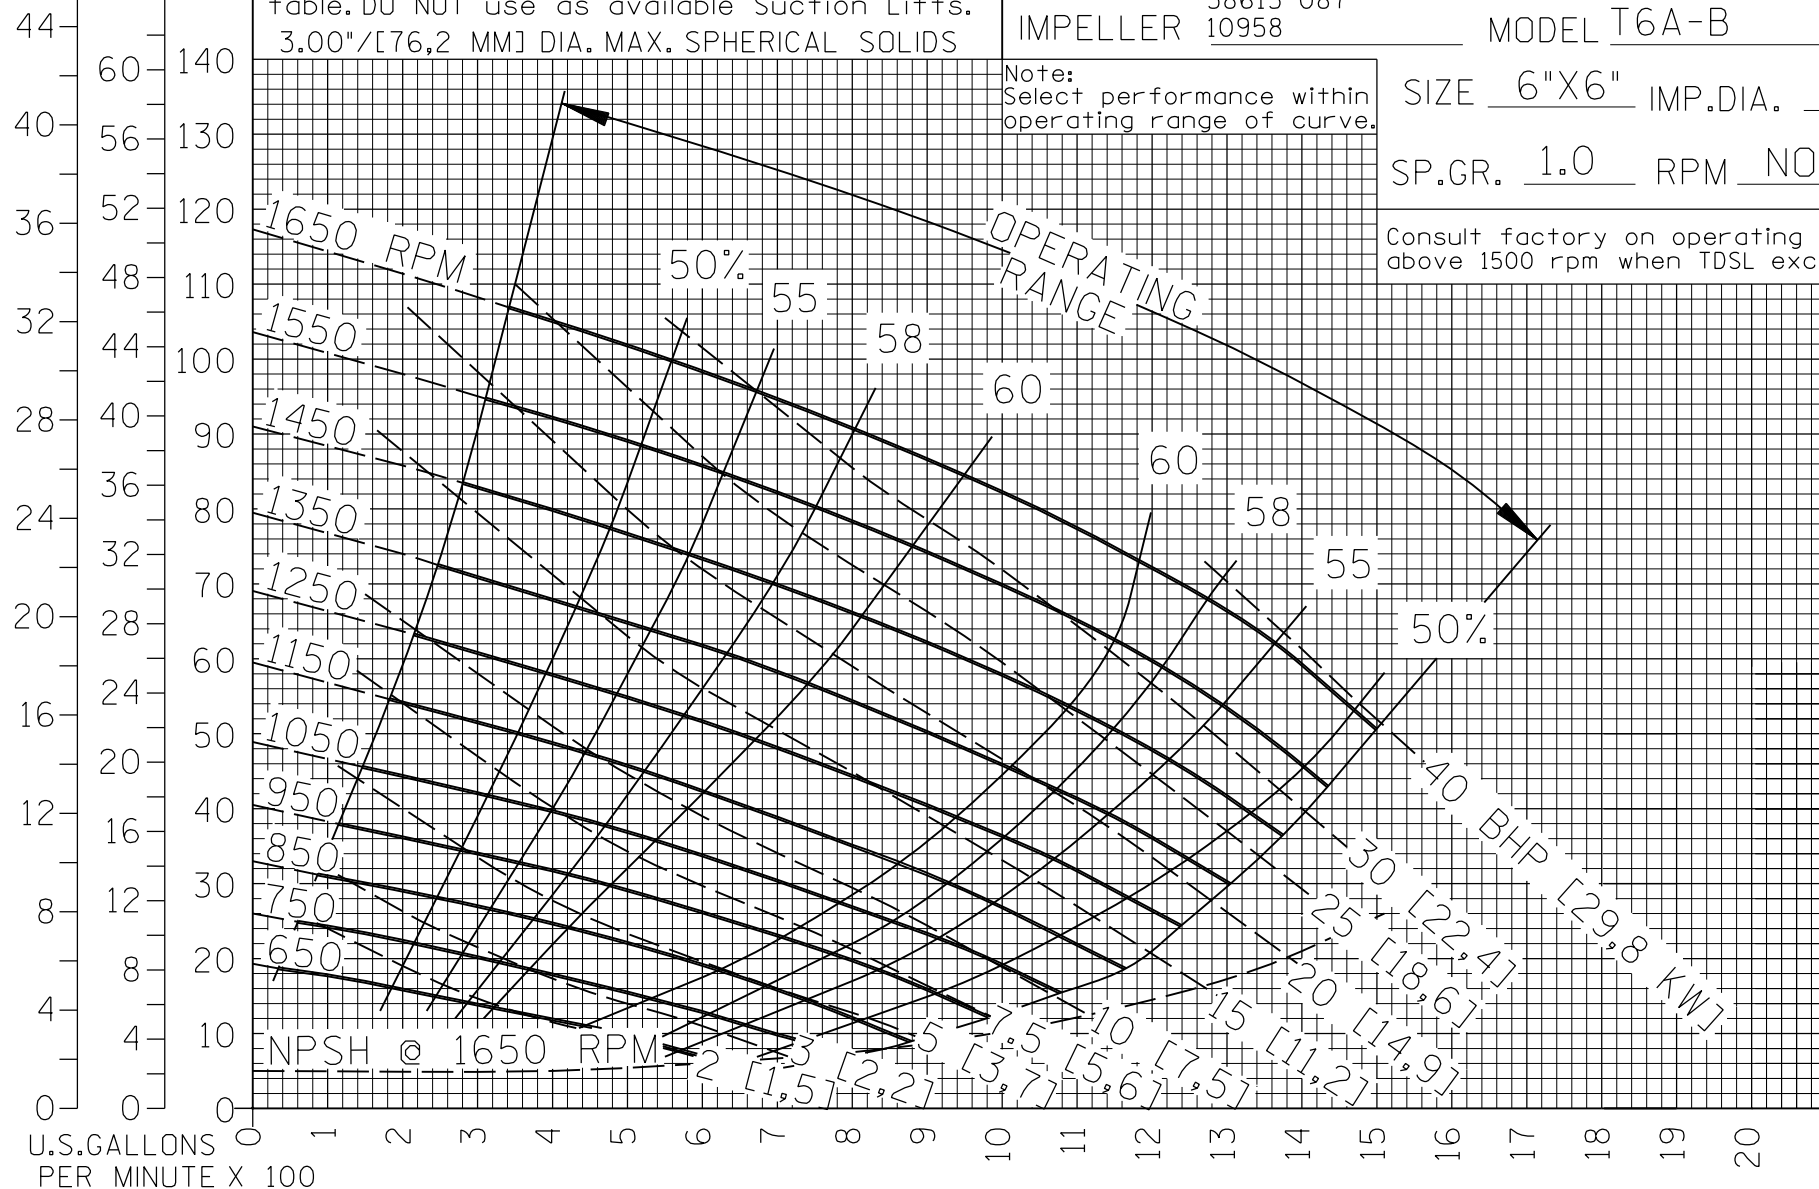

NPSH	
FT	M
0	0
10	3
20	6
30	9
40	12

FILE NO. t6ab.s06



T-1-07-R