


TOTAL HEAD

M PSI FT

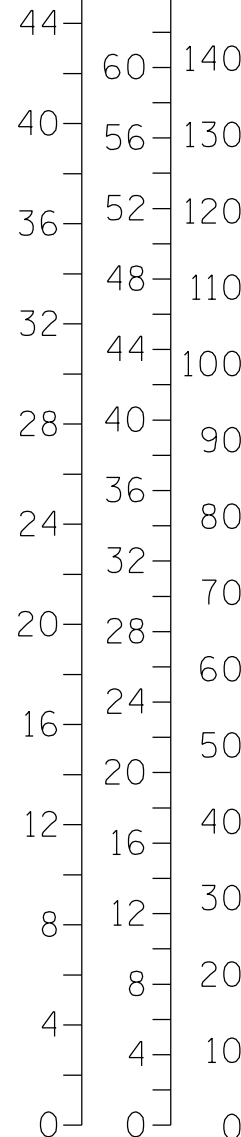

50HZ.

REPRIMING LIFTS

DIA.	11"	11.25"	11.50"	11.75"-12"	12.38"
FEET	16	17	18	20	23
METERS	4,9	5,2	5,5	6,1	7


Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 10957E
10957C CURVE T6CSC-B-3
 IMPELLER 38615-087
10958 MODEL T6CSC-B
 SIZE 6"X6" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1450

Note:
Select performance within operating range of curve.

Consult factory on operating conditions above 1350 rpm when TDSL exceeds 20 ft.

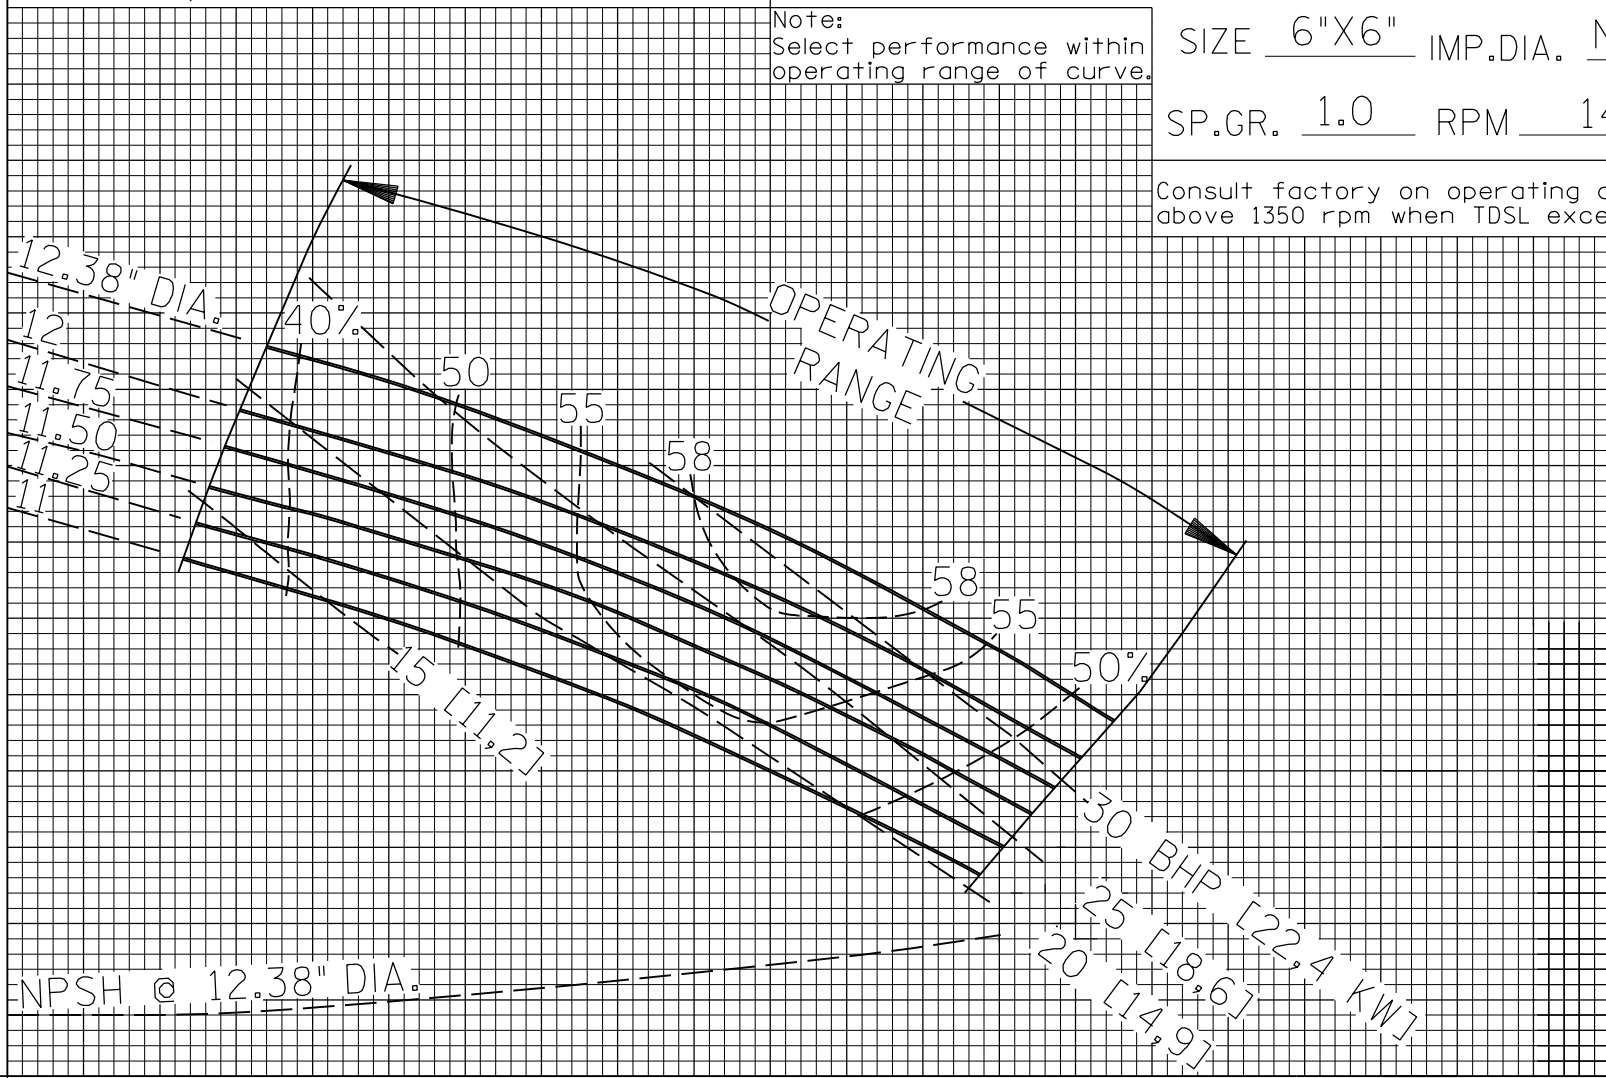

NPSH

FT M

0 10 20 30 40 50 60 70 80 90 100 110 120 130 140

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10



T-11-14