

TOTAL HEAD

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS  
 CURVE FOR SERIES APPLICATION ONLY &  
 SHOULD NOT BE USED FOR SINGLE PUMP  
 PERFORMANCE

PERFORMANCE CURVE

VOLUTE 38224-705 CURVE T8A-B-13

IMPELLER 12349 MODEL T8A-B

Performance shown does not  
 include any interconnecting piping


SIZE 8"X8" IMP.DIA. 14.75"

SP.GR. 1.0 RPM NOTED

NOTE: Series operation is limited by the operating  
 pressure & NPSH requirement of a single pump.  
 See single pump curve for NPSH, EFF., & HP.

Consult factory on operating conditions  
 above 1200 rpm when TDSL exceeds 20 ft.

2 PUMPS IN SERIES

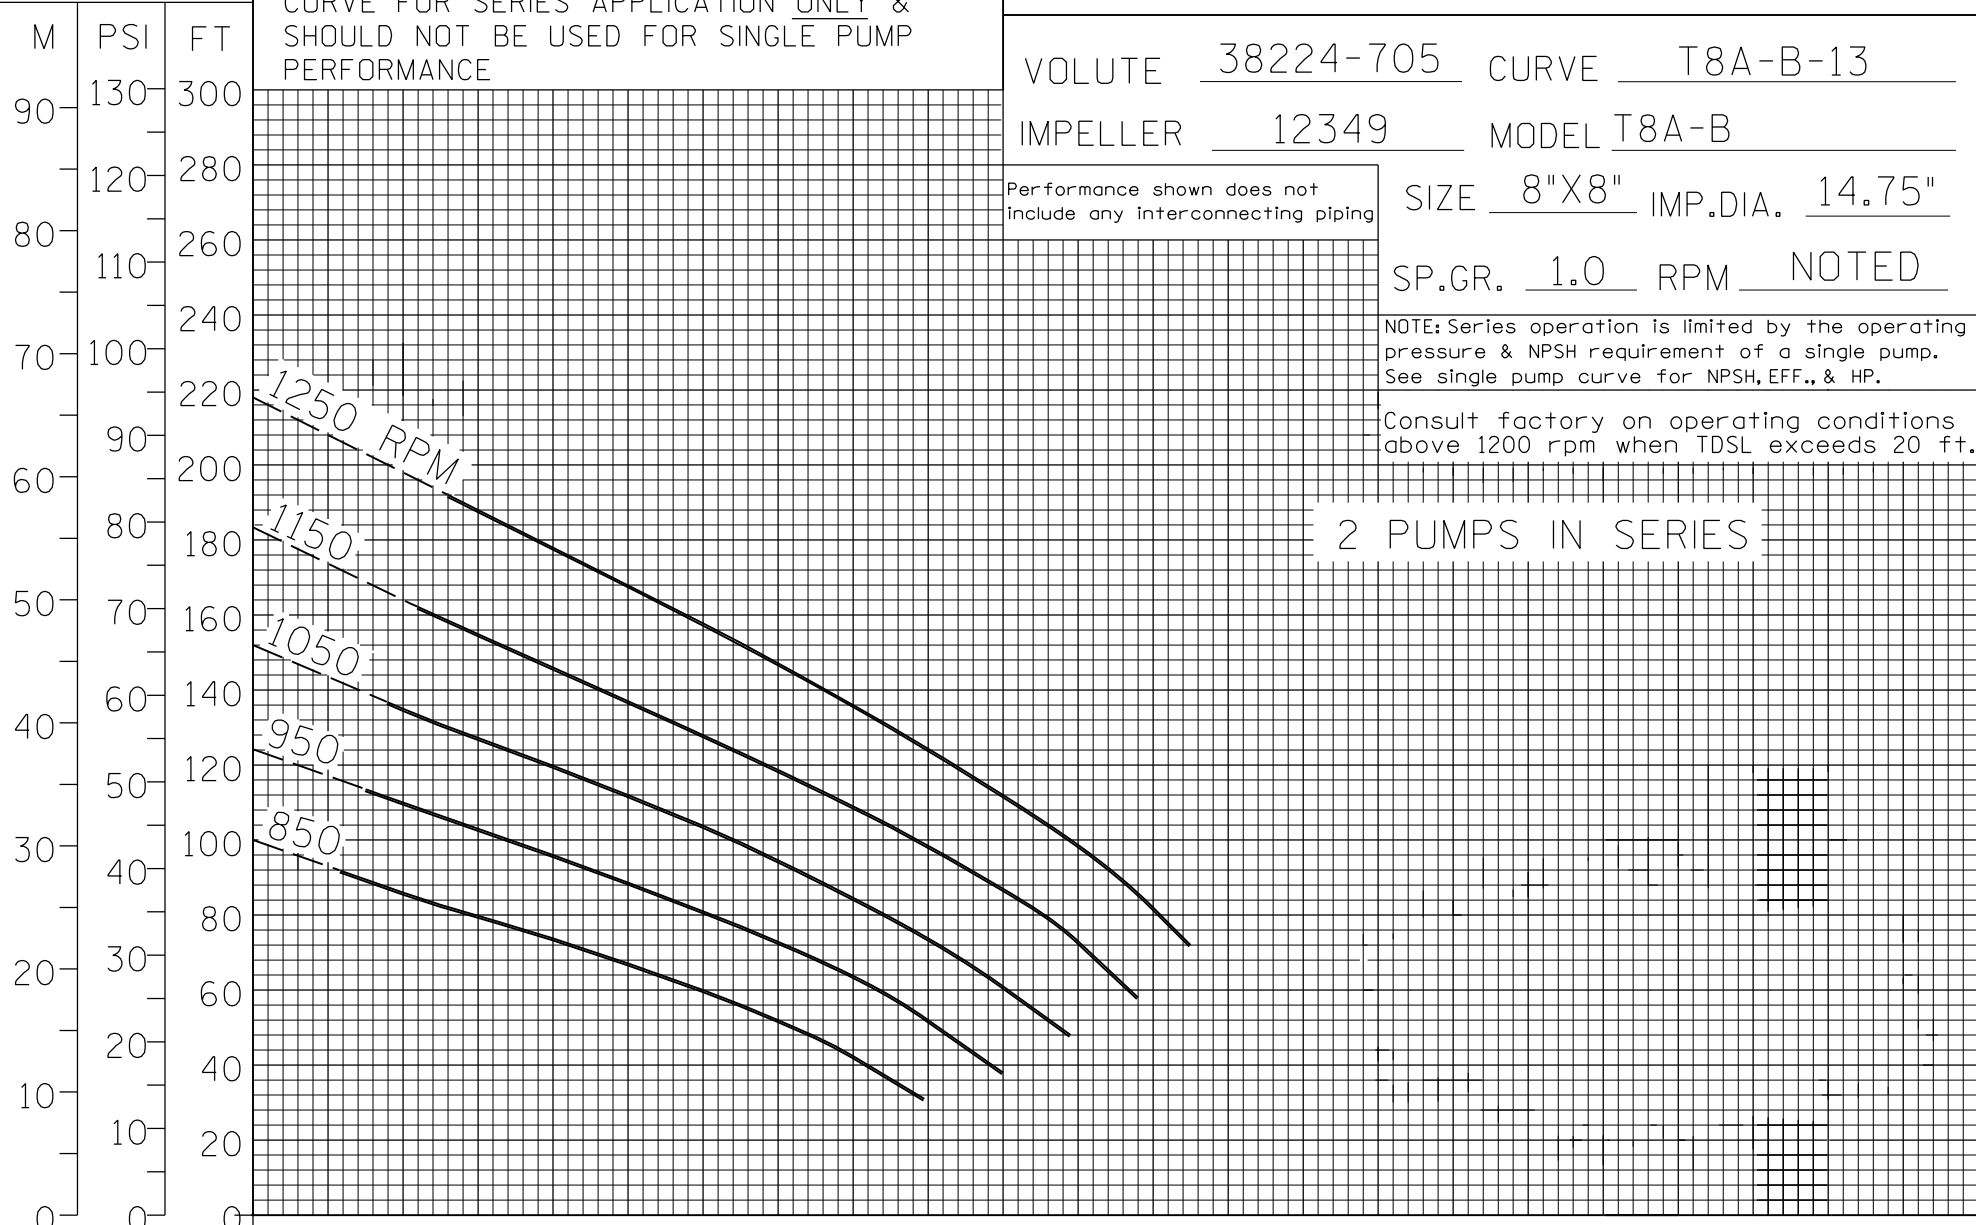

U.S. GALLONS  
 PER MINUTE X 100

LITRES  
 PER SECOND X 10

CUBIC METRES  
 PER HOUR X 100



T-8-09-R