

# PERFORMANCE CURVE

VOLUTE 38224-705 CURVE T8A-B-5

IMPELLER 12349 MODEL T8A-B

SIZE 8"X8" IMP.DIA. 13.75"



SP.GR. 1.0 RPM NOTED

Consult factory on operating conditions above 1200 rpm when TDSL exceeds 20 ft.

REPRIMING LIFTS										
RPM	650	750	850	950	1050	1150	1250	1350	1450	1550
FEET	6	8	11	14	15	17	20	21	22	23
METERS	1,8	2,4	3,4	4,3	4,6	5,2	6,1	6,4	6,7	7

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.  
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

Note:  
Select performance within operating range of curve.

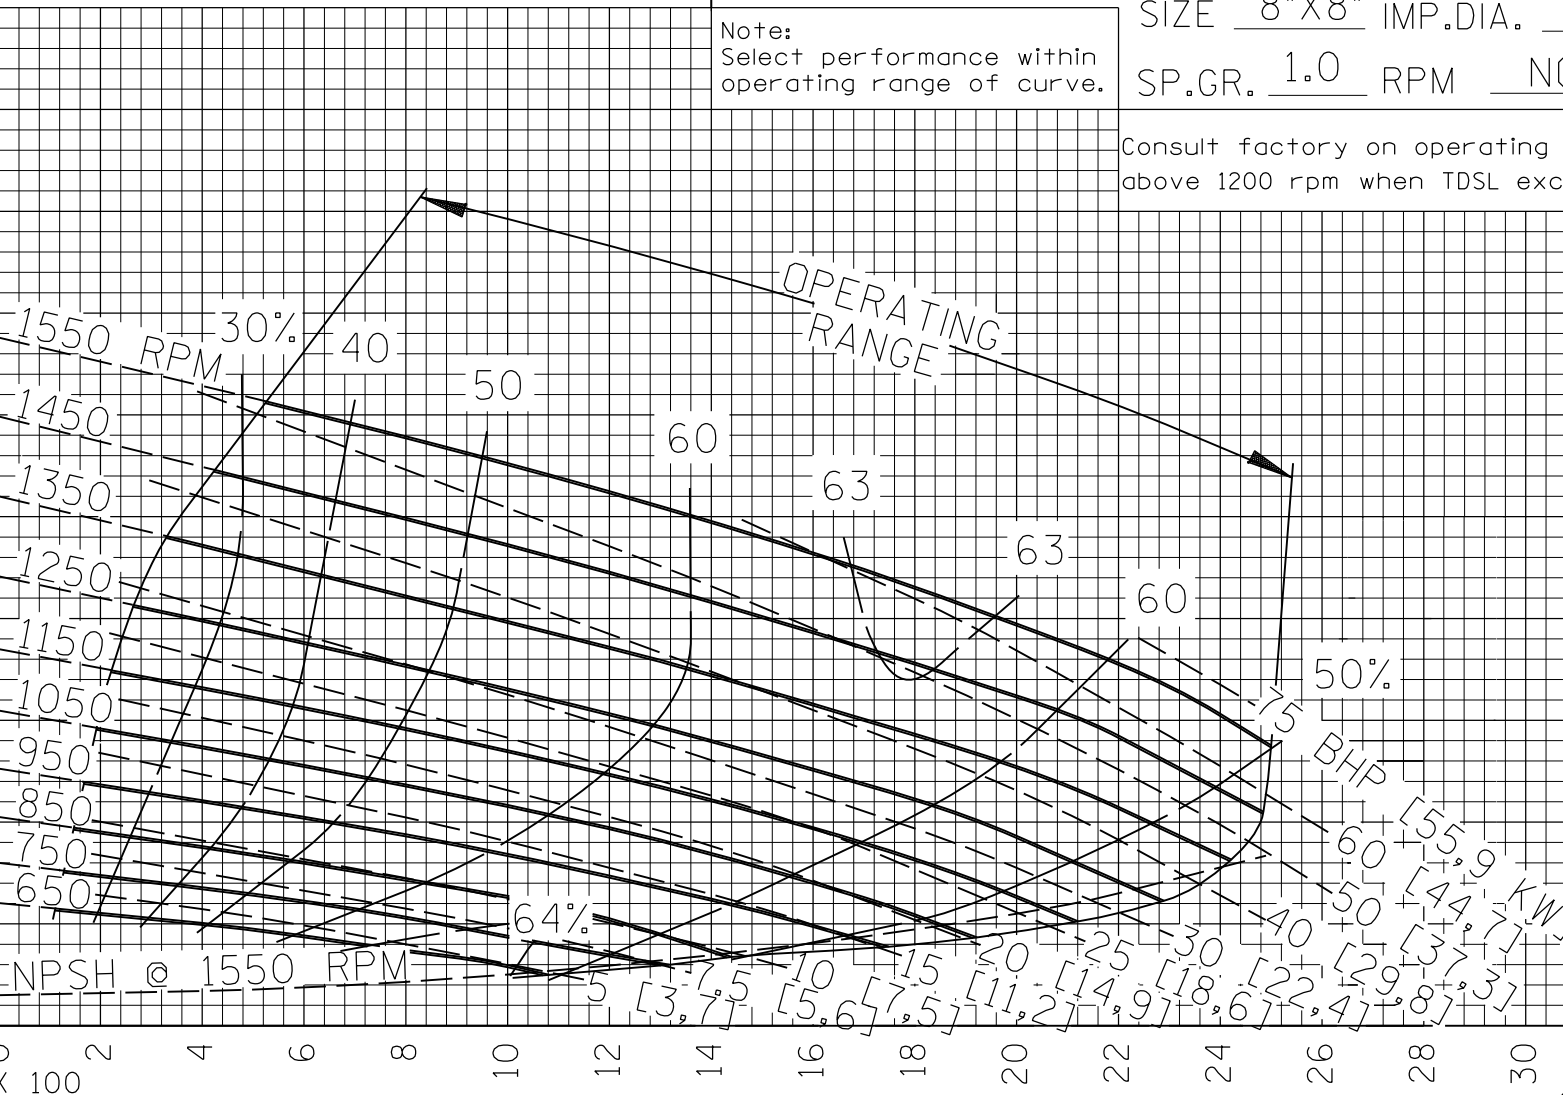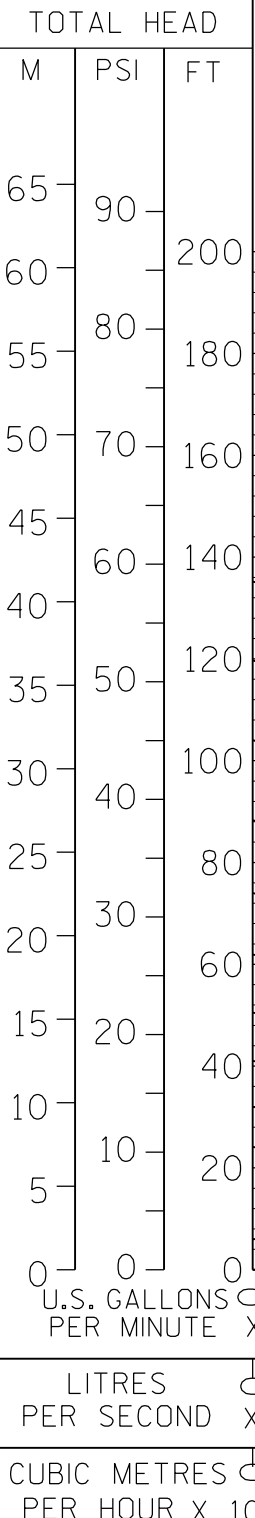

FILE NO. t8ab.s05



T5-99-R